

ELI LILLY AND COMPANY
HEALTH AND SAFETY PROCEDURE
North American Logistics Operations

Personal Protective Equipment (PPE) Assignments for North American Logistics Operations

USD-SOP-PPE Assignments-001

SUPERSEDES	001-002750, DOHS014
PURPOSE	To instruct North American Logistics Operations (NALO) employees in Personal Protective Equipment (PPE) assignments related to warehouse and maintenance operations.
AREAS INVOLVED	NALO Operations, NALO Quality Assurance, and NALO support areas including security guards for Plainfield, Enfield, and Fresno
APPROVALS	Representative, Health, Safety and Environmental Management, NALO Operations
REFERENCES	USD-SOP-Spill Clean Up-001 DOHS026: Powered Industrial Truck Spill/Clean Up DOHS180_OJT: OJT Personal Protective Equipment (PPE) DOHS200_LL: LL-Concepts of Fall Prevention DOHS201_OJT: OJT Fall Protection DOHS016OJT: OJT Knife Safety Indianapolis Site Occupational Health and Safety Personal Protective Program CFR 261.3(f)(2)
REASONS FOR REVISION	All revisions are marked with an (*): To update the Basic/Minimal Safe Clothing on Warehouse Floor section. • Rationale: For clarification.

TABLE OF CONTENTS

Topic	Page
Introduction	2
Hazard Assessments	2
General PPE Instructions	3
Basic/Minimal Safe Clothing on Warehouse Floor	4
Broken or Spilled Materials	4
PPE Assignment for Employees & Visitors That Enter a NALO Warehouse	4
PPE Assignments for Plainfield Operations	5
PPE Assignments for Plainfield, Enfield, & Fresno Operations	6
PPE Assignments for NALO Engineering & Maintenance	7
Non-Routine Hazards	8
Spotting for Elevated Lifts	9
Attachment A, PDC Safety Shoe Area	9
Attachment B, Enfield Safety Shoe Area	10
Attachment C, Fresno Safety Shoe Area	11

INTRODUCTION

All levels of management and supervision within NALO are committed to the creation of an injury-free work environment. Employees' safety knowledge, attitudes, and behaviors are critical for the success of this objective.

Lilly intends to design, construct, and operate facilities to eliminate job hazards that may cause personal injury. Where it is not feasible to eliminate such hazards, NALO employees are required to wear PPE to protect against hazards.

This procedure is formatted utilizing work groups within NALO to categorize PPE assignments for each work group. Each NALO employee should reference sections that include their specific work group to fully identify PPE assigned to their specific job tasks.

HAZARD ASSESSMENTS

1. PPE Hazard assessments were conducted and documented for existing tasks.
2. The HSE staff member maintains records of these hazard assessments.
3. PPE Hazard Assessments for new or changing tasks are required and can be prompted by the following: CIR H&S Questionnaire, NALO Launch Action List (new product/process), TrackWise Change Management, Addition of new equipment, Impact Assessment Tool (IAT), etc.

GENERAL PPE INSTRUCTIONS

Operators at all locations follow these general instructions for PPE:

Step	Action
1	Obtain PPE from designated storage locations. See area supervision for location of PPE storage.
2	Inspect all PPE, including fall protection equipment, prior to every use.
3	When applicable, clean PPE as needed by using mild soap and water and allow to air dry.
4	Store all PPE in a clean, dry location.
5	To request new or additional PPE, or for hands-on instruction or questions, contact a safety representative.
6	Reusable PPE may be returned to the PPE storage locations provided it is free of damage, unsoiled, and still ready for use. PPE that is soiled, chemically contaminated, or damaged shall be disposed and may not be stored in the PPE storage locations.
7	PPE that was damaged by or soiled by a chemical substance shall be disposed based on what substance it was and the chemical characteristics of PPE +chemical. PPE including contaminated clothing are not solid wastes unless they are regulated under the "contained in" policy [see US EPA regulation in CFR 261.3(f)(2)]. Under the "contained in" policy, the PPE/ clothing would need to be disposed as a hazardous waste if it exhibits a characteristic or contains a listed waste. Additionally, if it is listed or exhibits a characteristic and the contamination cannot be removed, the PPE must be treated to land disposal restriction treatment standards prior to disposal. See Table 1 below for examples on how to dispose of PPE. Consult HSE representative with questions.

Table 1: Disposal Guide for PPE

Type of PPE	Soiled/damaged by	Disposal method
Nitrile gloves	M-cresol containing chemicals	Put into the m-cresol waste drum
Cut resistant gloves	Dust, dirt, cardboard dust, water	Regular trash bin
Apron	Oil/ grease	Oily rag waste container
Lab coat	Battery Acid	Regular trash bin
Cloth gloves	Paint (acrylic, water based, latex)	Regular trash bin
Leather gloves	Wear/tear (item is broken/worn out/torn, etc.)	Regular trash bin
Cryogenic gloves	Pure Temp 4 (contents of orange popsicle packing material)	Regular trash bin
Butyl rubber gloves		
Safety glasses with side shields		
Safety goggles		
Face Shield		
Bump Cap/Hard Hat		

**BASIC/MINIMAL
SAFE CLOTHING
ON WAREHOUSE
FLOOR**

- Steel toed shoes/boots, toe caps, or overshoes with toe caps
- *Full length pants such as cargo pants, flame retardant workwear, and jeans. Shirts that cover the ball of the shoulder.
- Basic clothing free of holes to eliminate the exposure of bare skin
- *No sweatpants, leggings, shorts, or open heeled/toed shoes are permitted.

Exceptions to this basic/minimal clothing policy must be reviewed and approved by Management.

**BROKEN OR
SPILLED
MATERIALS**

Broken or spilled materials are cleaned up in accordance with USD-SOP-Spill Clean Up-001.

**PPE
ASSIGNMENT
FOR EMPLOYEES
& VISITORS THAT
ENTER A NALO
WAREHOUSE**

Employees and visitors, including tour groups that enter the PDC, Enfield and Fresno warehouses wear safety shoes and High Visibility shirts or vests as follows.

Note: PDC employees and visitors are not required to wear safety shoes or High Visibility shirts or vests when staying within the marked walk path that is located on the south perimeter wall of the warehouse (behind the guardrail). Enfield and Fresno employees and visitors are not required to wear safety shoes or High Visibility shirts or vests when staying in marked designated areas. See Attachments A, B and C.

Task	Description	PPE
Walk in a warehouse	Pedestrian travel throughout the warehouse	Steel toed shoes/boots, toe caps, or overshoes with toe caps High Visibility shirts or vests See the Basic/Minimal Safe Clothing on Warehouse Floor section above.

**PPE
ASSIGNMENTS
FOR PLAINFIELD
OPERATIONS**

Operators for Plainfield Operations wear PPE as follows:

<u>Task</u>	<u>Description</u>	<u>PPE</u>
Manually handle dry ice	Manually place blocks of dry ice into the refrigeration compartment of international shipping containers	Cryogenic or leather gloves, safety glasses with side shields
Manually wipe clean parts of box taping machine as regular maintenance/operational task.	Wet paper towel with ISS PRO-CARE citrus solvent liquid. Wipe tape machine with paper towel.	Disposable nitrile gloves
Manually wipe equipment, RF units, table tops and other workstation equipment.	Open disposable dispensing pack of alcohol wipes and pull out a wiper from the pack and then use the wiper to clean equipment	None
Perform tasks in PLA-4 freezer.	Includes all tasks associated with entering the freezer in PLA-4	Recommended personnel wear cold weather clothing (coat, cold-weather gloves, neck warmer, hand warmers, etc.)
Process Product Research and Development (PRD) Materials	Includes all tasks associated with processing, handling, lifting, packing, and labeling materials being shipped for PRD	Steel toed shoe/boots, toe caps, or overshoes with toe caps, cut resistant gloves, and safety glasses with side shields
Robotic Accumulation Conveyor Area	Includes tasks of clearing jams, sorting coolers per Air or Ground designation. Going under the conveyor is only option for access.	Steel toed shoe/boots, toe caps, or overshoes with toe caps, Bump Cap or Hard Hat.
For NALO employees performing functions at 3PL's or any other warehousing facilities.	Performing benchmarking tours, operational integration tasks, SAP functions or offering Quality oversight.	Steel toed shoes/boots, toe caps, or overshoes with toe caps. Cut resistant fiber gloves if handling boxes, high visibility shirts or vests.

**PPE
ASSIGNMENTS
FOR PLAINFIELD,
ENFIELD, &
FRESNO
OPERATIONS**

Operators for Plainfield, Enfield, and Fresno Operations wear PPE as follows:

Task	Description	PPE
Physical tasks / work performed during various NALO warehouse operator duties that involve handling corrugated material or plastic strapping.	Various picking, packing, shipping, forklift, preparing shipping containers, helping with launch activities, performing regular support functions that involve handling corrugated material or plastic strapping.	Steel toed shoes/boots, toe caps, or overshoes with toe caps. Cut resistant fiber gloves, high visibility shirts or vests.
Operate automatic pallet strapping tools (both battery powered hand held units and machines)	Thread plastic strapping tape into strapping tool, press buttons that cause the tool to increase tension, cause a heat weld joint and cut the strap	Cut resistant fiber gloves. Note: Do not stand in line with the strap while it is tensioned because the strap may break and snap forward. Do not allow others to be in line with the strap or be in the immediate vicinity.
Operate either an order picker or swing reach forklift, or articulating lift	Operate an order picker or swing reach forklift, with the operator compartment above ground level	Full body harness, self retracting lifeline/lanyard, fixed anchorage device.
Use hand tools to remove trailer security seals	Use bolt cutters (either manual or battery powered), or tin snips/side cuts to remove/cut metal seals that secure over the road truck/trailer doors.	- When using bolt cutters: safety glasses with sideshields and leather palm or general purpose gloves. - When using tin snips or side cuts: either leather palm or general purpose gloves
Add water to forklift batteries	Manually add water to a forklift battery, open each battery cap and insert a water hose nozzle	Safety glasses with sideshields or goggles, Nitrile or Butyl Rubber gloves.
Clean up a forklift battery acid solution spill of less than a pint/pound (if trained to do so)	Use an acid neutralizing material to clean up battery acid solution that has leaked or spilled from a forklift battery	Safety glasses or goggles and disposable nitrile gloves
Clean up hydraulic oil spilled from a forklift, less than a pint/pound (if trained to do so)	Use an absorbent material to clean up oil and/or hydraulic fluid that has leaked from a forklift.	Safety glasses or goggles and disposable nitrile gloves
Operators using a lift (not PIT),	Various tasks requiring non-maintenance operator(s) to use a lift	Hard hat for work above head and bump cap for travel only.

**PPE ASSIGNMENTS FOR
PLAINFIELD, ENFIELD, &
FRESNO**

Operators at Plainfield, Enfield, & Fresno Operations wear PPE as follows:

Task	Description	PPE
Physical tasks / work performed during various NALO warehouse operator duties		
Manually handle wood pallets	Manually handle empty wooden pallets	Leather, cut resistant fiber, or general purpose gloves
Use a box cutter knife	Use a box cutter knife to perform any type of cutting task. "Box knife" does not refer to a "carton opener" or a "hook knife". Reference DOHSO16OJT – OJT Knife Safety.	Cut resistant fiber glove(s) worn on, at least, the hand that is not holding the knife.
Cut, remove, or handle plastic pallet strapping	Use a hook knife to remove pallet strapping off a pallet of material.	Cut resistant fiber gloves. Note: When cutting the strap, hold the upper portion and stand to the side. The lower strap may snap forward.
Clean up broken glass	Use a broom and dust pan to clean up broken glass	Safety glasses with sideshields, leather palm or general purpose gloves.
Apply pallet-size rubber bands to pallets Note: Does not include removing rubber band(s).	Applying pallet-size rubber bands around product when securing to a pallet	Safety glasses with side shields
Physical tasks / work performed during various NALO warehouse operator duties that involve leaking or possible leaking containers of Axiron.	Damaged or leaking containers. Following basic PPE requirements, review NALO procedures for Spill Cleanup and RCRA Hazardous Waste.	Use the appropriate PPE which includes: - Goggles or Face Shield per chemical SDS for both products - Disposable nitrile gloves - Long sleeve lab coat, cover bare skin areas
Sealing or unsealing fiber drums	Removing or adding lid enclosure along with locking ring and tab locking mechanism.	Cut resistant gloves

**PPE
ASSIGNMENTS
FOR NALO
ENGINEERING &
MAINTENANCE**

Maintenance technicians working at the Enfield, Fresno or Plainfield sites wear PPE as follows:

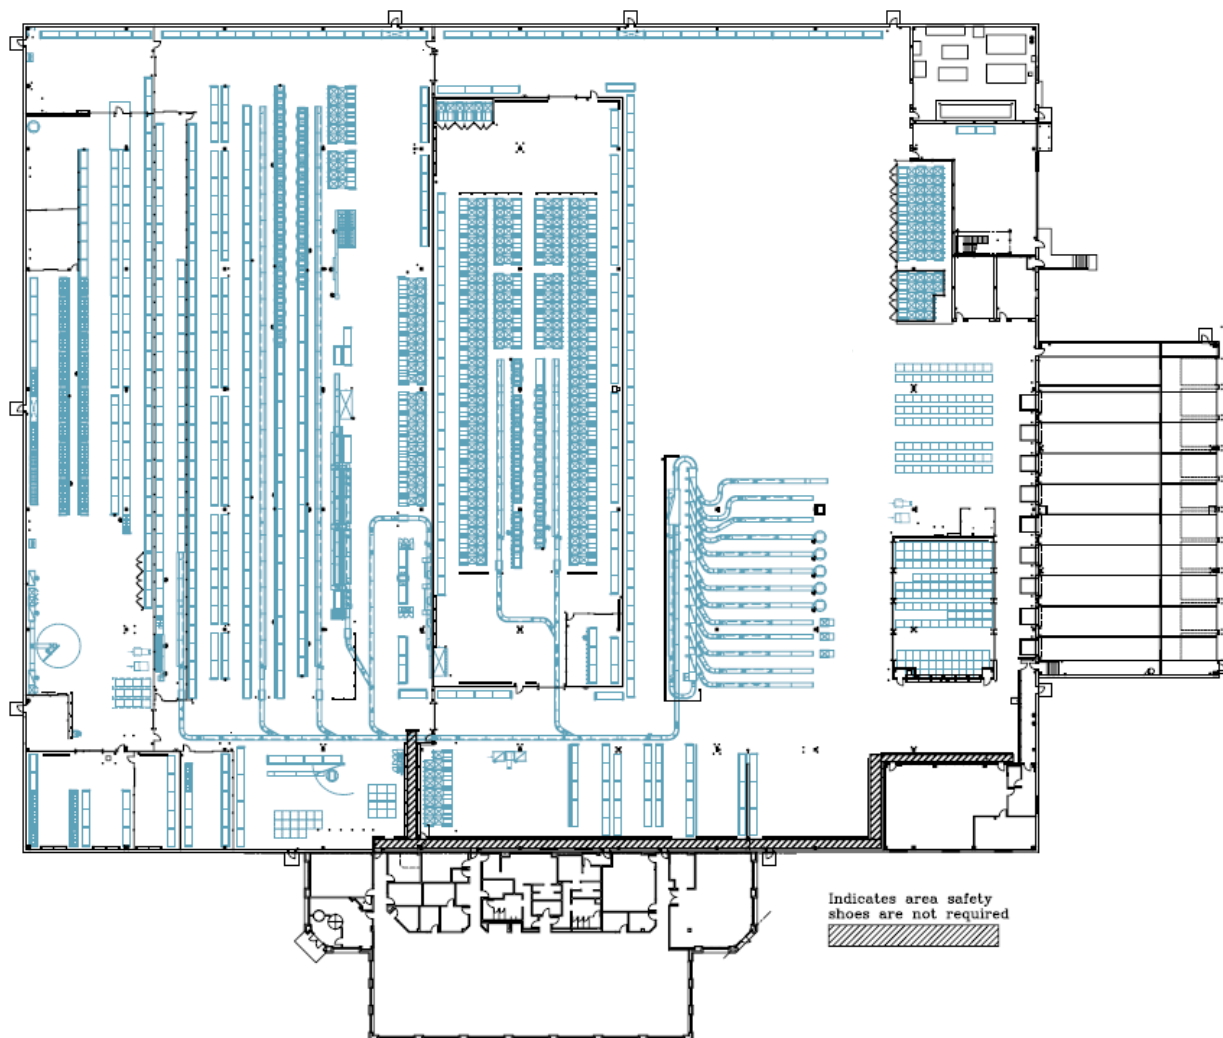
Task	Description	PPE
Maintenance Tasks	N/A	Refer to "PPE Assignments" Manual in Maintenance Shop

**NON-
ROUTINE
HAZARDS**

1. It is possible a request may prompt a new non-routine activity to take place, thus a pre-job hazard evaluation should be performed before the non-routine task begins.
2. Supervision assigning and employees who perform the non-routine tasks evaluate hazards, consider the appropriate use of PPE and consider the safe work practice controls such as lockout, fire hazard permits and confined space entry,
3. Supervision contacts the HSE staff member to review and finalize hazard identification and control for non-routine job tasks.
4. Ask supervision questions related to non-routine tasks.
Note: No employee is expected to perform any task he/she considers unsafe that has not been assessed by a safety representative. No employee is expected to perform any task without proper PPE supplied to perform the task.

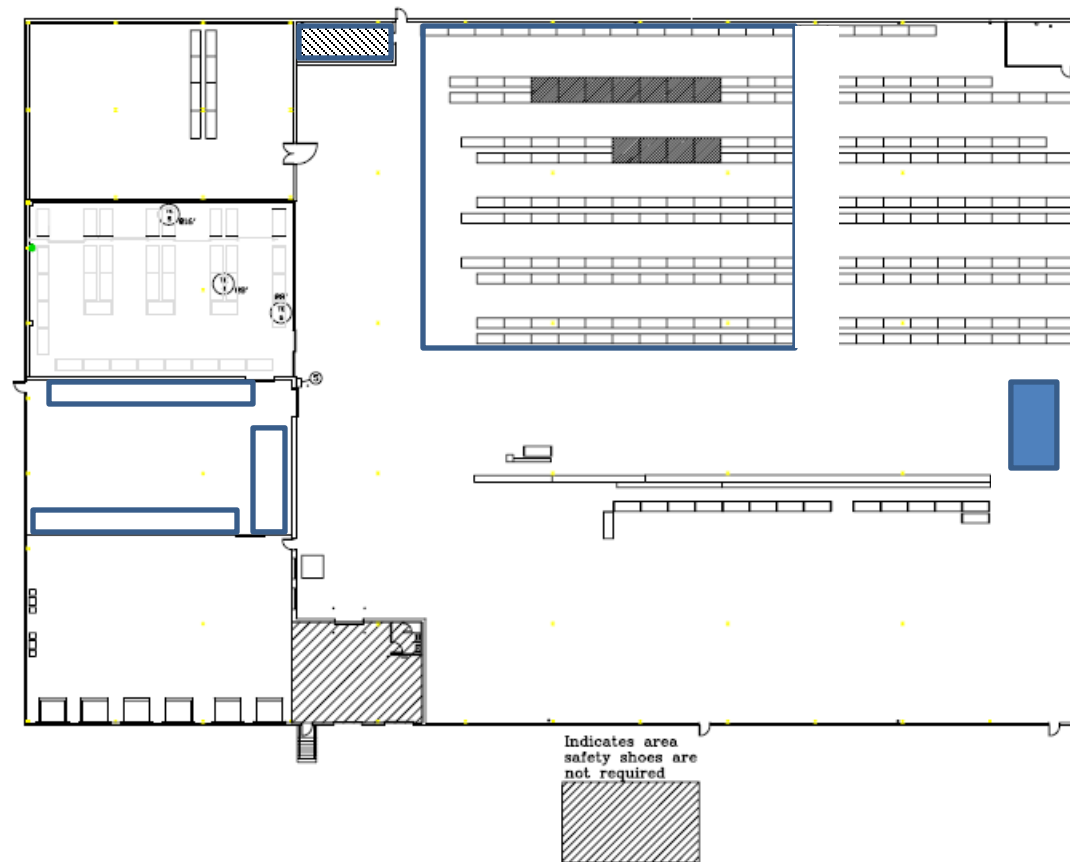
**SPOTTING
FOR
ELEVATED
LIFTS**

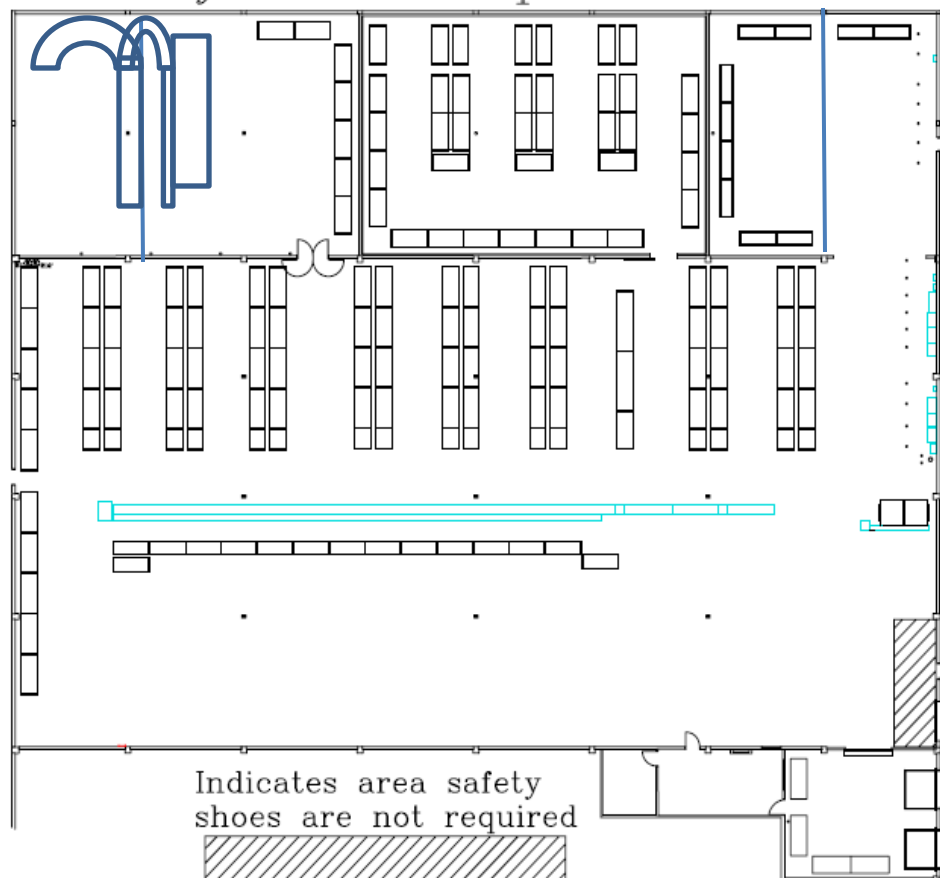
Any personnel, including security guards and contractors, shall wear an approved hard hat per ANSI standard (ANSI) Z89.1-2009 while spotting for lifts while they are elevated and occupied. The spotting is to advise or route traffic around the lift to minimize the risk of fall hazards associated with supplies or tools. The hard hat will help ensure the spotter is protected while serving in this role.

Attachment A
PDC Safety Shoe AreaPlainfield Distribution Center
Safety Shoe Required Areas

Note: The above drawing does not include the PLA-4 layout. Safety shoes are required throughout PLA-4 and there are no zones in PLA-4 where safety shoes are not required.

Enfield Distribution Center Safety Shoe Required Area



Attachment C
Fresno Safety Shoe AreaFresno Distribution Center
Safety Shoe Required Areas

Document Approval Signatures

Approved Date: 12 Apr 2024

Approval Verdict: Approve	Eric Willard (C036806@lilly.com) Approver 11-Apr-2024 16:47:14 GMT+0000
Approval Verdict: Approve	Don Moran (C027173@lilly.com) Approver 12-Apr-2024 20:16:00 GMT+0000
Reviewer / Approver Additional Details	N/A