## Avaliação de Banco de Dados 05

Crie um arquivo docker-compose.yml com:

## Passos de execução

```
node1] (local) root@192.168.0.12 ~
 vi docker-compose.yml
 node1] (local) root@192.168.0.12 ~
 docker-compose up -d
ARN[0000] /root/docker-compose.yml: the attribut
[+] Running 14/33
 +] Running 33/33
                                    ] Pulling

√ phpmyadmin Pulled

√ af302e5c37e9 Pull complete

   √ 71a74ed03dab Pull complete

√ 3ef8d0774deb Pull complete

√ 11d17388a3b8 Pull complete

√ 0814cbbf72a2 Pull complete

√ 3a28acedadf8 Pull complete

√ 2ab7ef40feaf Pull complete

√ 88324ccb20a1 Pull complete

√ ad5f2fca9132 Pull complete

√ 9df2a6231627 Pull complete

√ b3207e60ff9a Pull complete

√ d18c9f420b35 Pull complete

√ 673faad72ba8 Pull complete

√ 4f4fb700ef54 Pull complete

√ a5c74661bb9e Pull complete

√ 1cf5cbfd971f Pull complete


√ e92d8472eb26 Pull complete

√ 7755344c0dda Pull complete

√ b0f9dd503cef Pull complete

√ 2ee0fe041682 Pull complete

 √ db Pulled
```

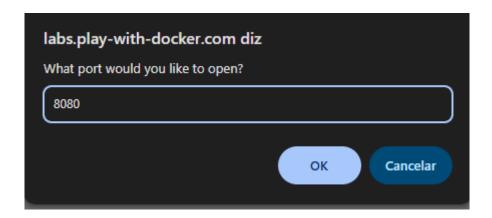



## Bem-vindo ao phpMyAdmin

