


Gite
Explore and code with

Gitee Pages
JavaDoc
Quality Analysis
Jenkins for Gitee
Baidu Efficiency Cloud
Tencent CloudBase
Tencent Cloud Serverless
悬镜安全
Don't show this again

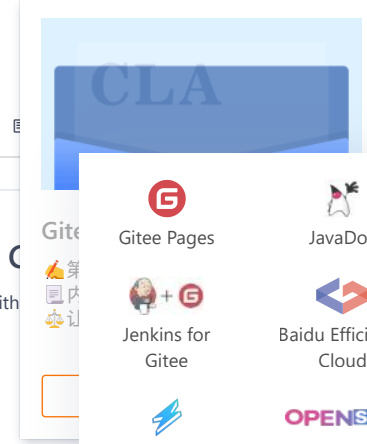

UserMapper.xml 3.32 KB

Copy Edit Web IDE Raw

smallchill authored 3 years ago . 2.7.0.RELEASE,内核全面升级,增加岗位管理,用户导入导出

```xml
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE mapper PUBLIC "-//mybatis.org//DTD Mapper 3.0//EN" "http://mybatis.org/dtd/mybatis-3-mapper.dtd">
<mapper namespace="org.springblade.system.user.mapper.UserMapper">

    <!-- 通用查询映射结果 -->
    <resultMap id="userResultMap" type="org.springblade.system.user.entity.User">
        <result column="id" property="id"/>
        <result column="tenant_id" property="tenantId"/>
        <result column="create_user" property="createUser"/>
        <result column="create_time" property="createTime"/>
        <result column="update_user" property="updateUser"/>
        <result column="update_time" property="updateTime"/>
        <result column="status" property="status"/>
        <result column="is_deleted" property="isDeleted"/>
        <result column="code" property="code"/>
        <result column="account" property="account"/>
        <result column="password" property="password"/>
        <result column="name" property="name"/>
        <result column="real_name" property="realName"/>
        <result column="email" property="email"/>
        <result column="phone" property="phone"/>
        <result column="birthday" property="birthday"/>
        <result column="sex" property="sex"/>
        <result column="role_id" property="roleId"/>
        <result column="dept_id" property="deptId"/>
    </resultMap>

    <!-- 通用查询结果列 -->
    <sql id="baseColumnList">
        select id,
        create_user AS createUser,
        create_time AS createTime,
        update_user AS updateUser,
        update_time AS updateTime,
        status,
        is_deleted AS isDeleted,
        account, password, name, real_name, email, phone, birthday, sex, role_id, dept_id
    </sql>

    <select id="selectUserPage" resultMap="userResultMap">
        select * from blade_user where is_deleted = 0
    </select>

    <select id="getUser" resultMap="userResultMap">
        SELECT
            *
```

```
        WHERE
            tenant_id = #{param1} and account = #{param2} and p
    </select>

    <select id="getRoleName" resultType="java.lang.String">
        SELECT
        role_name
        FROM
        blade_role
        WHERE
        id IN
        <foreach collection="array" item="ids" index="index" op
            #{ids}
        </foreach>
        and is_deleted = 0
    </select>

    <select id="getRoleAlias" resultType="java.lang.String">
        SELECT
            role_alias
        FROM
            blade_role
        WHERE
            id IN
        <foreach collection="array" item="ids" index="index" open="(" close=")" separator=",">
            #{ids}
        </foreach>
        and is_deleted = 0
    </select>

    <select id="getDeptName" resultType="java.lang.String">
        SELECT
            dept_name
        FROM
            blade_dept
        WHERE
            id IN
        <foreach collection="array" item="ids" index="index" open="(" close=")" separator=",">
            #{ids}
        </foreach>
        and is_deleted = 0
    </select>

    <select id="exportUser" resultType="org.springblade.system.user.excel.UserExcel">
        SELECT id, tenant_id, account, name, real_name, email, phone, birthday, role_id, dept_id, post_id FROM blade_user ${ew.customSqlSegment}
    </select>

</mapper>
```

Gitee 已支持 CLA 协议签署

✍第一方功能集成，签署流程更高效
内置可自定义的协议模板
让开源贡献也能有据可依

I know View Details



©OSCHINA. All rights reserved