## **snyk** Vulnerability DB

Snyk Vulnerability Database > npm > ts-deepmerge

## **Prototype Pollution**

Affecting ts-deepmerge package, versions <2.0.2

INTRODUCED: 25 JUL 2022 CVE-2022-25907 ②

CWE-1321 ②

FIRST ADDED BY SNYK

How to fix?

Upgrade ts-deepmerge to version 2.0.2 or higher.

#### Overview

ts-deepmerge is an a deep merge function that automatically infers the return type based on your input, without mutating the source objects.

Affected versions of this package are vulnerable to Prototype Pollution due to missing sanitization of the merge function.


#### PoC:

```
js var tsDeepmerge = require("ts-deepmerge").default const test
= tsDeepmerge({}, JSON.parse('{ "__proto__": { "admin": true }
}')) console.log(test.admin) // true
```

#### Details

Prototype Pollution is a vulnerability affecting JavaScript. Prototype
Pollution refers to the ability to inject properties into existing
JavaScript language construct prototypes, such as objects. JavaScript
allows all Object attributes to be altered, including their magical
attributes such as \_\_proto\_\_, constructor and prototype. An

Q Search by package n

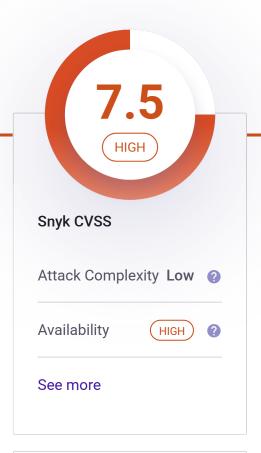



# Do your applications use this vulnerable package?

In a few clicks we can analyze your entire application and see what components are vulnerable in your application, and suggest you quick fixes.

Test your applications

attacker manipulates these attributes to overwrite, or pollute, a JavaScript application object prototype of the base object by injecting other values. Properties on the <code>Object.prototype</code> are then inherited by all the JavaScript objects through the prototype chain. When that happens, this leads to either denial of service by triggering JavaScript exceptions, or it tampers with the application source code to force the code path that the attacker injects, thereby leading to remote code execution.

There are two main ways in which the pollution of prototypes occurs:

- Unsafe Object recursive merge
- Property definition by path

#### Unsafe Object recursive merge

The logic of a vulnerable recursive merge function follows the following high-level model:

```
merge (target, source)
foreach property of source

if property exists and is an object on both the target and the source merge(target[property], source[property]) else
target[property] = source[property]
```

When the source object contains a property named \_\_proto\_\_ defined with Object.defineProperty() , the condition that checks if the property exists and is an object on both the target and the source passes and the merge recurses with the target, being the prototype of Object and the source of Object as defined by the attacker. Properties are then copied on the Object prototype.

Clone operations are a special sub-class of unsafe recursive merges, which occur when a recursive merge is conducted on an empty object:  $merge(\{\}, source)$ .

10dash and Hoek are examples of libraries susceptible to recursive merge attacks.

#### Property definition by path



Learn about Prototype Pollution vulnerabilities in an interactive lesson.

Start learning

SnykSNYK-JSID TSDEEPMERGE2959975

Published 8 Aug 2022

Disclosed 25 Jul 2022

Credit Aras Abbasi

Report a new vulnerability

Found a mistake?

There are a few JavaScript libraries that use an API to define property values on an object based on a given path. The function that is generally affected contains this signature: theFunction(object, path, value)

If the attacker can control the value of "path", they can set this value to \_\_proto\_\_.myValue . myValue is then assigned to the prototype of the class of the object.

### Types of attacks

There are a few methods by which Prototype Pollution can be manipulated:

Туре	Origin	Short description
Denial of service (DoS)	Client	This is the most likely attack.  DoS occurs when Object holds generic functions that are implicitly called for various operations (for example, toString and valueOf).  The attacker pollutes Object.prototype.someattr and alters its state to an unexpected value such as Int or Object. In this case, the code fails and is likely to cause a denial of service.  For example: if an attacker pollutes Object.prototype.toString by defining it as an integer, if the codebase at any point was reliant on someobject.toString() it would fail.
Remote Code Execution	Client	Remote code execution is generally only possible in cases where the codebase evaluates a specific attribute of an object, and then executes that evaluation.  For example: eval(someobject.someattr).  In this case, if the attacker pollutes  Object.prototype.someattr they are likely to be able to leverage this in order to execute code.

Туре	Origin	Short description
Property Injection	Client	The attacker pollutes properties that the codebase relies on for their informative value, including security properties such as cookies or tokens.  For example: if a codebase checks privileges for someuser.isAdmin, then when the attacker pollutes Object.prototype.isAdmin and sets it to equal true, they can then achieve admin privileges.

#### Affected environments

The following environments are susceptible to a Prototype Pollution attack:

- Application server
- Web server
- Web browser

#### How to prevent

- 1. Freeze the prototype— use Object.freeze (Object.prototype).
- 2. Require schema validation of JSON input.
- 3. Avoid using unsafe recursive merge functions.
- 4. Consider using objects without prototypes (for example, Object.create(null)), breaking the prototype chain and preventing pollution.
- 5. As a best practice use  $\mbox{Map}$  instead of  $\mbox{Object}$  .

#### For more information on this vulnerability type:

Arteau, Oliver. "JavaScript prototype pollution attack in NodeJS application." GitHub, 26 May 2018

#### References

- GitHub Commit
- GitHub Release

Snyk Open Source
Snyk Code
Snyk Container
Snyk Infrastructure as Code
Test with Github
Test with CLI
RESOURCES
Vulnerability DB
Documentation
Disclosed Vulnerabilities
Blog
FAQs
COMPANY
About
Jobs
Contact
Policies
Do Not Sell My Personal Information
CONTACT US
Support
Report a new vuln
Press Kit
Events

PRODUCT

FIND US ONLINE



#### © 2022 Snyk Limited

Registered in England and Wales. Company number: 09677925

Registered address: Highlands House, Basingstoke Road, Spencers Wood, Reading, Berkshire, RG7 1NT.