


## Modul 9

Nama : Ivan Amar Fadzilla  
NIM : L200170040  
Kelas : B

- fcreate

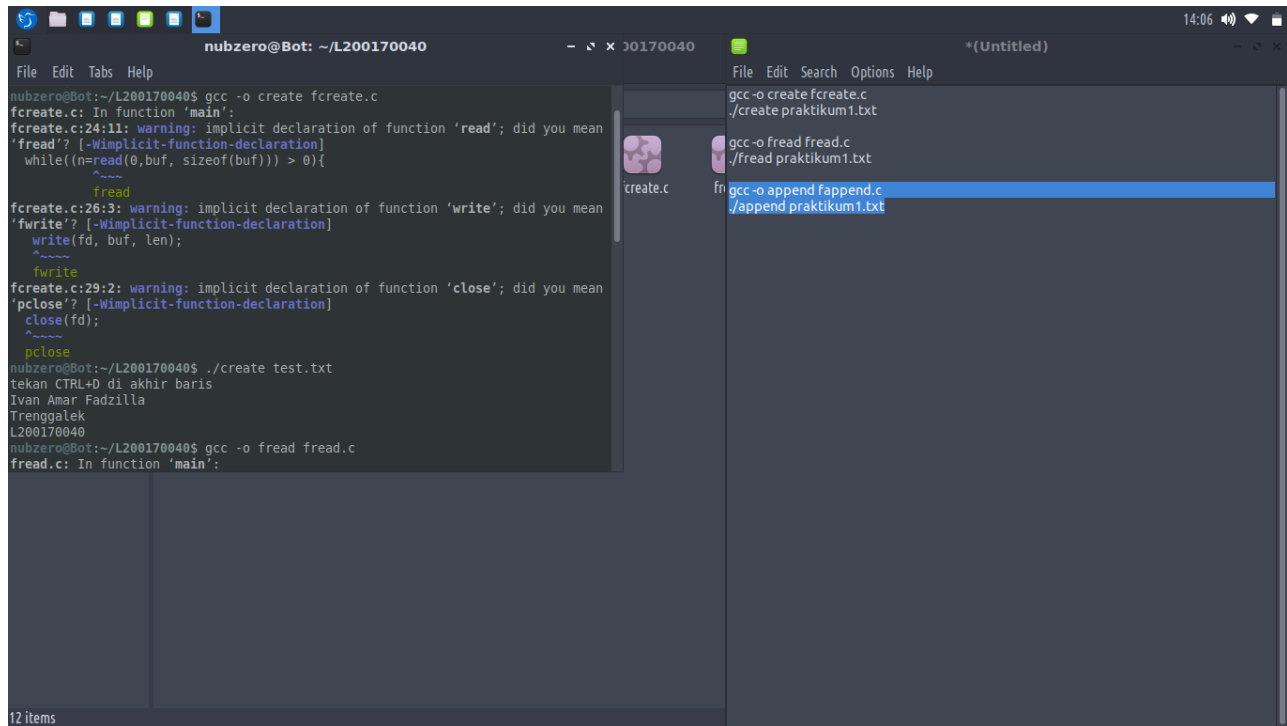

The screenshot shows a terminal window and a file explorer. The terminal window, titled 'nubzero@Bot: ~/L200170040', displays the following commands and output:

```
nubzero@Bot:~/L200170040$ gcc -o create fcreate.c
fcreate.c: In function 'main':
fcreate.c:24:11: warning: implicit declaration of function 'read'; did you mean
'fread'? [-Wimplicit-function-declaration]
  while((n=read(0,buf, sizeof(buf))) > 0){
            ^~~~~
fcreate.c:26:3: warning: implicit declaration of function 'write'; did you mean
'fwrite'? [-Wimplicit-function-declaration]
  write(fd, buf, len);
  ^~~~~
fcreate.c:29:2: warning: implicit declaration of function 'close'; did you mean
'pclose'? [-Wimplicit-function-declaration]
  close(fd);
  ^~~~~
pclose
nubzero@Bot:~/L200170040$ ./create test.txt
tekan CTRL+D di akhir baris
Ivan Amar Fadzilla
Trenngalek
L200170040
nubzero@Bot:~/L200170040$ gcc -o fread fread.c
fread.c: In function 'main':
```

The file explorer, titled '\* (Untitled)', shows a list of files and folders. The files are:

- gcc -o create fcreate.c
- ./create praktikum1.txt
- gcc -o fread fread.c
- ./fread praktikum1.txt
- gcc -o append fappend.c
- ./append praktikum1.txt

The file 'fcreate.c' is highlighted in the list.

- fread

The screenshot shows a terminal window on the left and a file explorer on the right. The terminal window has a title bar 'nubzero@Bot: ~/L200170040' and a menu bar 'File Edit Tabs Help'. The terminal output shows the compilation of 'fread.c' with warnings about implicit declarations of 'read' and 'close'. It then shows the execution of './fread test.txt' which prints 'Isi Dari File test.txt adalah : Ivan Amar Fadzilla Trenggalek adzilla L200170040 adzilla'. Finally, it shows the compilation of 'append.c' with a warning about an implicit declaration of 'read'.

```
nubzero@Bot:~/L200170040$ gcc -o fread fread.c
fread.c: In function 'main':
fread.c:23:8: warning: implicit declaration of function 'read'; did you mean 'fread'? [-Wimplicit-function-declaration]
  while(read(fd, buf, sizeof(buf)) > 0)
         ^~~~~
fread.c:28:2: warning: implicit declaration of function 'close'; did you mean 'pclose'? [-Wimplicit-function-declaration]
  close(fd);
  ^~~~~
pclose
nubzero@Bot:~/L200170040$ ./fread test.txt
Isi Dari File test.txt adalah :
Ivan Amar Fadzilla
Trenggalek
adzilla
L200170040
adzilla
nubzero@Bot:~/L200170040$ gcc -o append fappend.c
fappend.c: In function 'main':
fappend.c:24:11: warning: implicit declaration of function 'read'; did you mean 'fread'? [-Wimplicit-function-declaration]
  while((n=read(0,buf, sizeof(buf))) > 0){
            ^~~~~
```

The file explorer on the right has a title bar '\* (Untitled)' and a menu bar 'File Edit Search Options Help'. It shows a list of files: 'gcc -o create fcreate.c', 'create praktikum1.txt', 'gcc -o fread fread.c', 'fread praktikum1.txt', 'gcc -o append fappend.c', and 'append praktikum1.txt'. The file 'append praktikum1.txt' is selected.

- fappend

The screenshot shows a terminal window on the left and a file explorer on the right. The terminal window has a title bar 'nubzero@Bot: ~/L200170040' and a menu bar 'File Edit Tabs Help'. The terminal output shows the compilation of 'append.c' with warnings about implicit declarations of 'read', 'write', and 'close'. It then shows the execution of './append test.txt' which prints 'tekan CTRL+D di akhir baris Informatika'. Finally, it shows the compilation of 'append.c' with a warning about an implicit declaration of 'read'.

```
nubzero@Bot:~/L200170040$ gcc -o append fappend.c
fappend.c: In function 'main':
fappend.c:24:11: warning: implicit declaration of function 'read'; did you mean 'fread'? [-Wimplicit-function-declaration]
  while((n=read(0,buf, sizeof(buf))) > 0){
            ^~~~~
fappend.c:26:3: warning: implicit declaration of function 'write'; did you mean 'fwrite'? [-Wimplicit-function-declaration]
  write(fd, buf, len);
  ^~~~~
fwrite
fappend.c:29:2: warning: implicit declaration of function 'close'; did you mean 'pclose'? [-Wimplicit-function-declaration]
  close(fd);
  ^~~~~
pclose
nubzero@Bot:~/L200170040$ ./append test.txt
tekan CTRL+D di akhir baris
Informatika
nubzero@Bot:~/L200170040$
nubzero@Bot:~/L200170040$
```

The file explorer on the right has a title bar '\* (Untitled)' and a menu bar 'File Edit Search Options Help'. It shows a list of files: 'gcc -o create fcreate.c', 'create praktikum1.txt', 'gcc -o fread fread.c', 'fread praktikum1.txt', 'gcc -o append fappend.c', and 'append praktikum1.txt'. The file 'append praktikum1.txt' is selected.