


NAMA : Firdaus Aulia Faza

NIM : L200180042

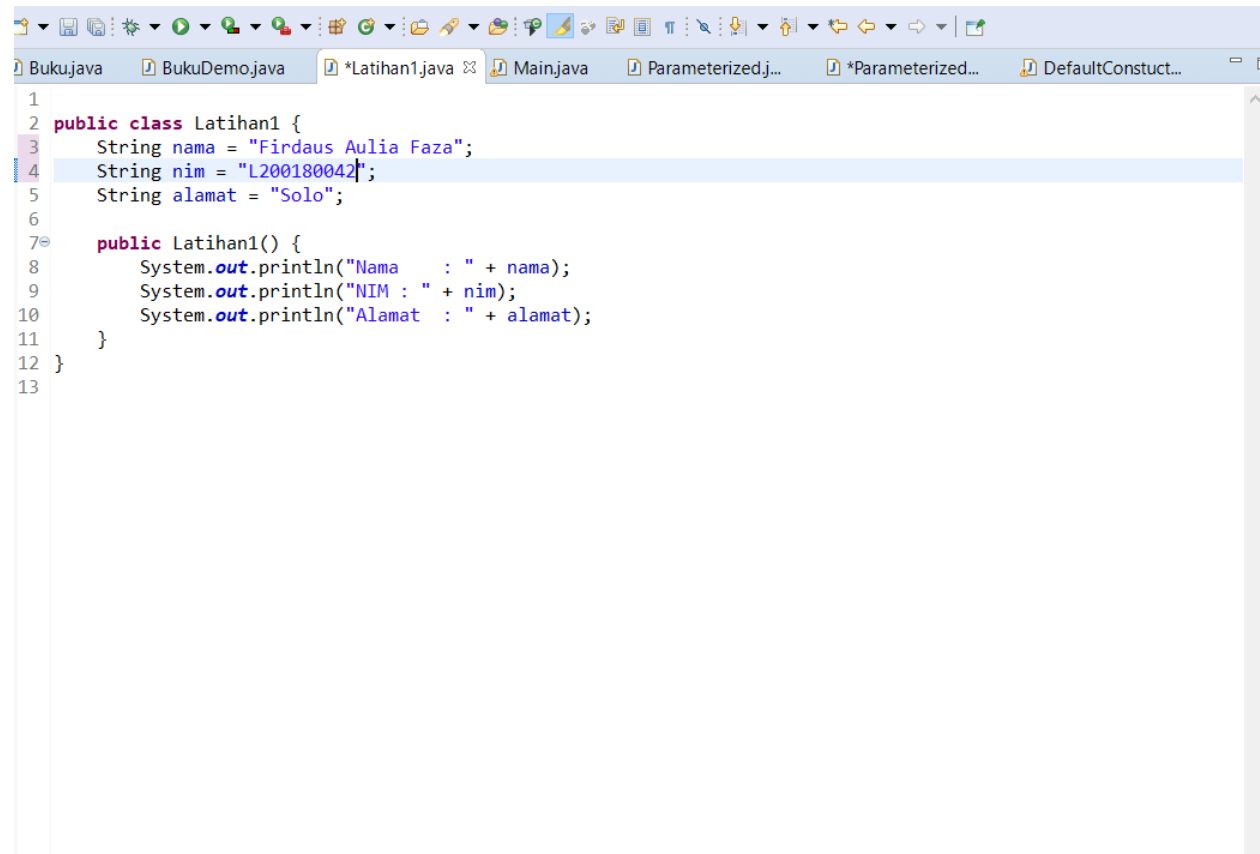

```
1
2 public class Latihan1 {
3     String nama = "Firdaus Aulia Faza";
4     String nim = "L200180042";
5     String alamat = "Solo";
6
7     public Latihan1() {
8         System.out.println("Nama      : " + nama);
9         System.out.println("NIM : " + nim);
10        System.out.println("Alamat   : " + alamat);
11    }
12 }
13
```

```
Buku.java  BukuDemo.java  Latihan1.java  Main.java  Parameterized.j...  *Parameterized...  DefaultCor
1
2 public class Main {
3     public static void main(String[] args) {
4         Latihan1 k = new Latihan1();
5     }
6
7 }
8 |
```

<terminated> Main [Java Application] C:\Program Files\Java\jdk-13\bin\javaw.exe (Dec 26, 2019, 1:41:12 PM)


Nama : Firdaus Aulia Faza
NIM : L200180042
Alamat : Solo

The screenshot shows an IDE with a Java class named `Parameterized` and its console output. The class has two attributes, `nama` and `nim`, and a `semester` attribute. It has a constructor that takes `nama`, `semester`, and `nim` as parameters and initializes the attributes. It also has an `info()` method that prints the values of the attributes. The console output shows the results of the `info()` method call.

```
1 |
2 public class Parameterized {
3     String nama, nim;
4     int semester;
5
6 public Parameterized(String nama, int semester, String nim) {
7     this.nama = nama;
8     this.semester = semester;
9     this.nim = nim;
10 }
11
12 public void info() {
13     System.out.println("Nama : " + nama + "\n" + "Semester : " + semester + "\n" + "NIM : " + nim);
14
15 }
16 }
17
```

<terminated> Main [Java Application] C:\Program Files\Java\jdk-13\bin\javaw.exe (Dec 26, 2019, 1:41:12 PM)

Nama : Firdaus Aulia Faza
NIM : L200180042
Alamat : Solo

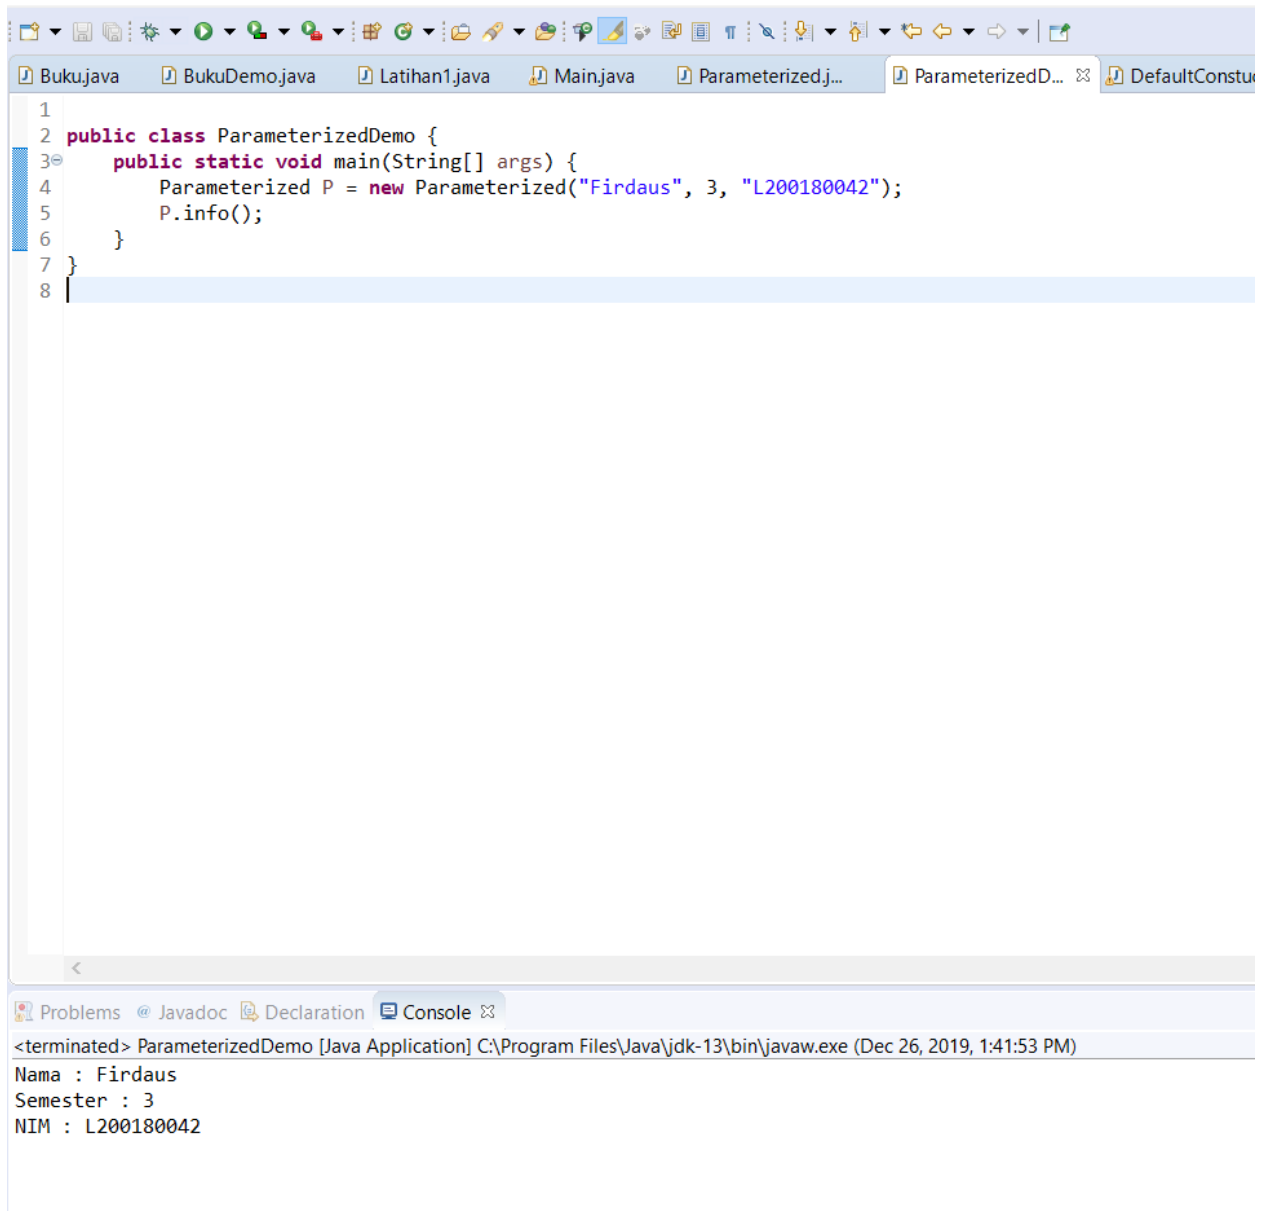

Buku.java BukuDemo.java Latihan1.java Main.java Parameterized.j... ParameterizedD... DefaultConstuc

```
1 |
2 public class DefaultConstuctor {
3     public DefaultConstuctor() {
4         System.out.println("Default Constructor");
5     }
6
7     public static void main (String[] args) {
8         DefaultConstuctor a = new DefaultConstuctor();
9     }
10 }
11
```