Cara menambahkan path
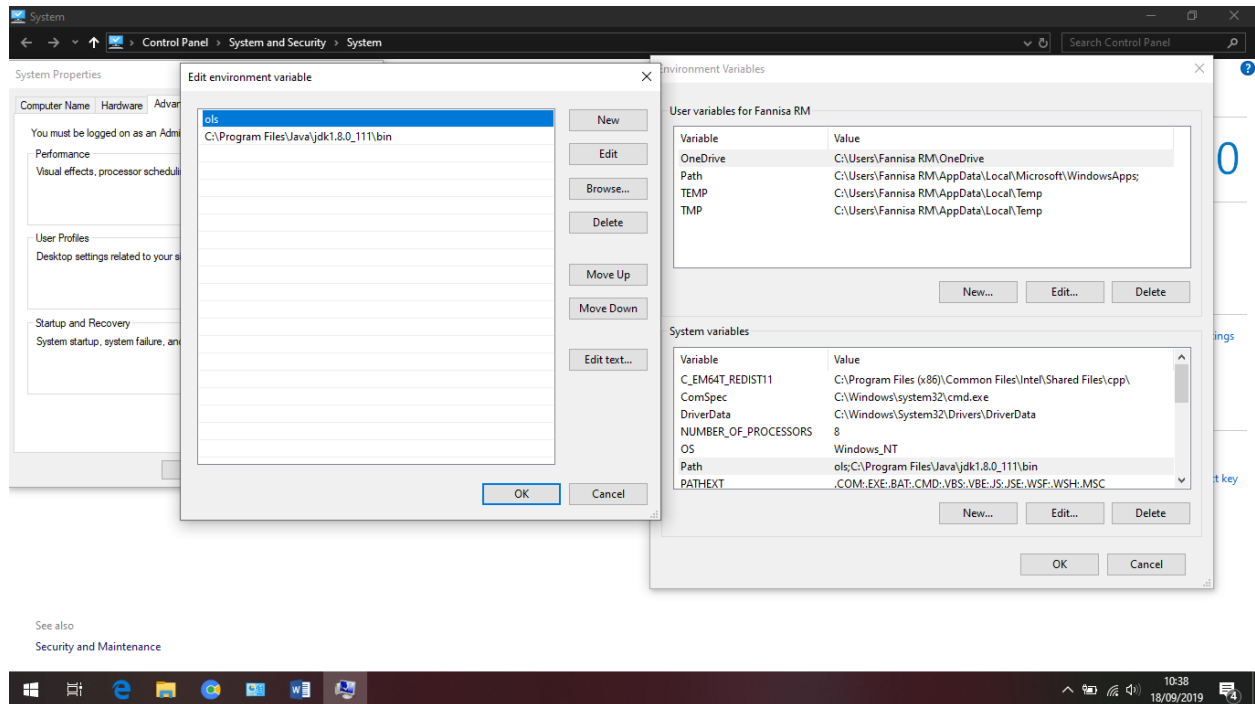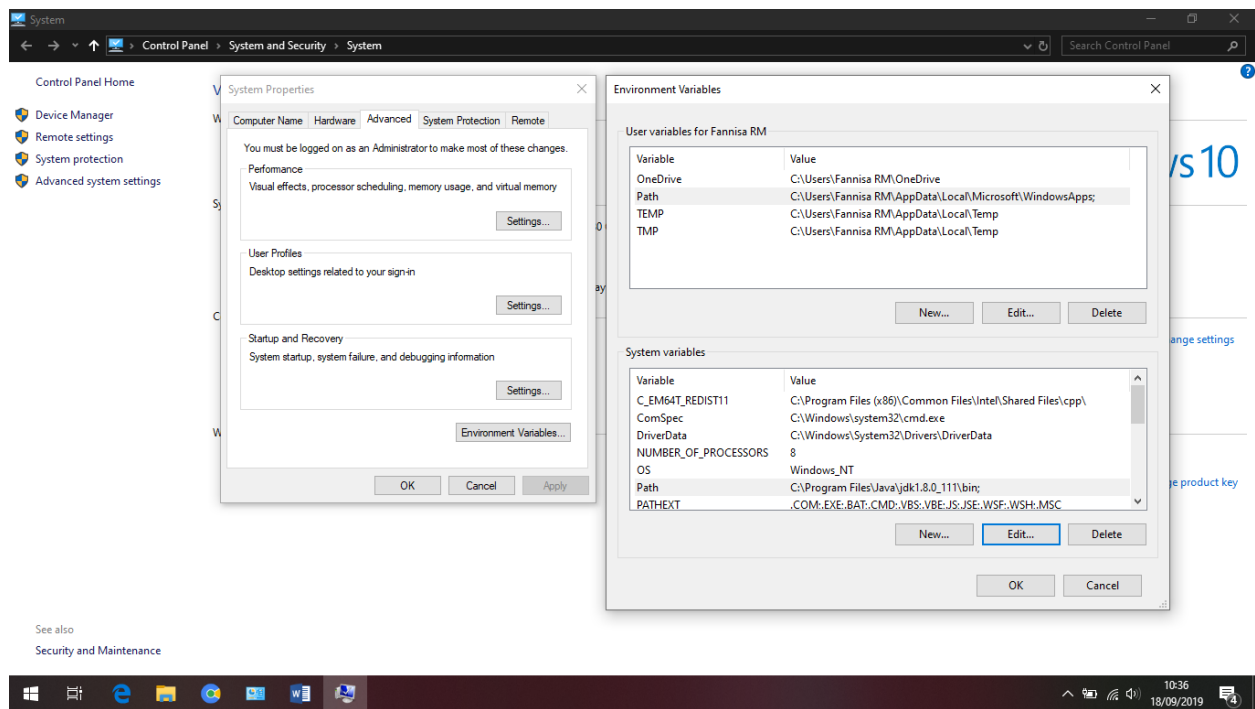
File Edit Format View Help

```java
public class Program{
        public static void main(String[]args){
                System.out.println("Hello World");
                }
}
```

Ln 2, Col 40   130%   Windows (CRLF)   UTF-8

Command Prompt

```
Microsoft Windows [Version 10.0.18362.356]
(c) 2019 Microsoft Corporation. All rights reserved.

C:\Users\Fannisa RM>java -version
java version "1.8.0_111"
Java(TM) SE Runtime Environment (build 1.8.0_111-b14)
Java HotSpot(TM) 64-Bit Server VM (build 25.111-b14, mixed mode)

C:\Users\Fannisa RM>java
Usage: java [-options] class [args...]
           (to execute a class)
   or  java [-options] -jar jarfile [args...]
           (to execute a jar file)
where options include:
    -d32          use a 32-bit data model if available
    -d64          use a 64-bit data model if available
    -server       to select the "server" VM
                  The default VM is server.

    -cp <class search path of directories and zip/jar files>
    -classpath <class search path of directories and zip/jar files>
                  A ; separated list of directories, JAR archives,
                  and ZIP archives to search for class files.
    -D<name>=<value>
                  set a system property
    -verbose:[class|gc|jni]
                  enable verbose output
    -version      print product version and exit
    -version:<value>
                  Warning: this feature is deprecated and will be removed
                  in a future release.
                  require the specified version to run
    -showversion  print product version and continue
    -jre-restrict-search | -no-jre-restrict-search
                  Warning: this feature is deprecated and will be removed
                  in a future release.
                  include/exclude user private JREs in the version search
    -? -help      print this help message
    -X            print help on non-standard options
    -ea[:<packagename>...|:<classname>]
    -enableassertions[:<packagename>...|:<classname>]
                  enable assertions with specified granularity
    -da[:<packagename>...|:<classname>]
    -disableassertions[:<packagename>...|:<classname>]
```

```
Command Prompt                                                      —  □  ×

C:\Users\Fannisa RM>cd..

C:\Users>cd..

C:\>D:

D:\>dir
 Volume in drive D is DATA
 Volume Serial Number is 4078-13F3

 Directory of D:\

18/09/2019  10:39    <DIR>          Documents
16/09/2019  20:46    <DIR>          Downloads
08/07/2019  16:17    18.695.882.752 DriverPack_17.10.11-19043.iso
11/09/2019  20:11       341.868.448 jdk-8u111-nb-8_2-windows-x64.exe
12/09/2019  16:17    <DIR>          Music
16/09/2019  21:50    <DIR>          Pictures
17/09/2019  10:14         1.354.278 PPT SO.pptx
16/09/2019  21:50               419 Program.class
16/09/2019  21:52               108 Program.java
16/09/2019  23:06             1.127 Roti.class
16/09/2019  22:45               531 Roti.java
16/09/2019  22:36               224 RotiDemo.java
12/09/2019  16:17    <DIR>          Videos
15/09/2019  11:21     2.344.222.720 Zorin-OS-15-Core-64-bit-r1.iso
               9 File(s) 21.383.330.607 bytes
               5 Dir(s)  334.246.473.728 bytes free

D:\>javac Program.java

D:\>java Program
Hello World

D:\>
```