\mathbf{C}


MODUL 8

Latihan

```
| Michael Nethern (DE 501) | Company | Company
```

```
| Modella Frechama (DE EAX) | Prof. |
```

```
| Package | Pack
```

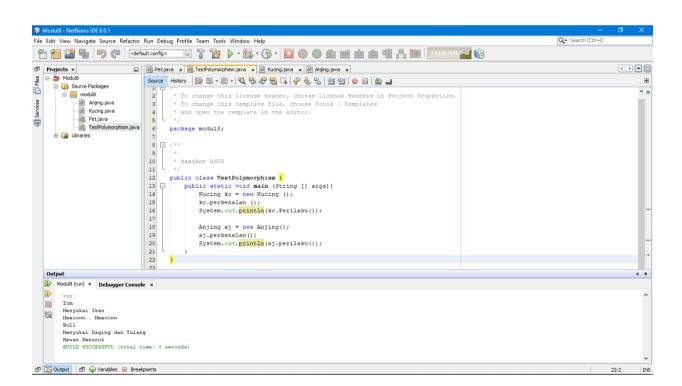

Tugas

```
polymorphism - NetBeans IDE 8.0.1
  🗗 🔞 bankpribad.java x 🚳 main.java x 🚳 testpolymorphism.java x 🗷 customerdata.java x 🖹 main.java x 🚳 bank,java x 🚳 bank,java x 🔞 banksyariah,java x 🚳 banksymmin.java x
Files
               public class customerdata {

String nama;

int tanggallahir;

String pekerjaan;

int gaji;

public customerdata(String nama) {

this.nama=nama;

System.out.println(this.nama);

}
                                   public class customerdata {
    String nama;
    int tanggallahir;
    String pekerjaan;
  Projects
               public customerdata(String nama, int tanggallahir,String pekerjaan, int gaji){
                                                                            this.gaji=gaji;
System.out.println("nama :"+ nama+"\ntanggal lahir :"+tanggallahir+"\npekerjaan :"+pekerjaan+"\ngaji :"+gaji+"\n\n");
 ☵ 닭 👼 🧿 🛊 🚾
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          U: 0.15 kB/s ヘ Φ) ■ // 🖳 📰 IND 20.35 📮
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          Q ▼ Search (Ctrl+I)
  File Edit View Navigate Source Refactor Run Debug Profile Team Tools Window Help
    The two configers of the two configers of the configers o
  🗗 🔞 bankorbadi.java x 🚳 main.java x 🔞 bankopram.java x 🔞 bankopram.java x 🔞 cestpolymorphism.java x 🔞 customerdata.java x 🚳 main.java x 🔞 bank.java x 🔞 bankspar.java x 🔞 bankspar.java x 🔞 bankspar.java x
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  Source Hatory | Source Hatory 
               - Services
  Elles
                12 public class main {
13 public street
                                      public class main {
    public static void main(String [] args) {
        customerdata cl= new customerdata("Ilyas",6112000, "Dosen",10000000);
        customerdata c2= new customerdata("Ali",7112000, "Pegawai",10000000);
        customerdata c3= new customerdata("Nur",6102000, "Teknisi",10000000);
        customerdata c5= new customerdata("Nanda",512000, "Karyawan",10000000);
        customerdata c6= new customerdata("Nanda",512000, "Karyawan",10000000);
        customerdata c6= new customerdata("Hafidh",27102000, "Notaris",10000000);
        customerdata c8= new customerdata("Faisal",6112000, "Assitektur",10000000);
        customerdata c8= new customerdata("Edi",751999, "Dokter",10000000);
        customerdata c8= new customerdata("Aryan",1122000, "Arsitektur",10000000);
        customerdata c9= new customerdata("Kukuh",10122000, "Akuntan",100000000);
  🗗 屆 Output
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       14:50
```

