

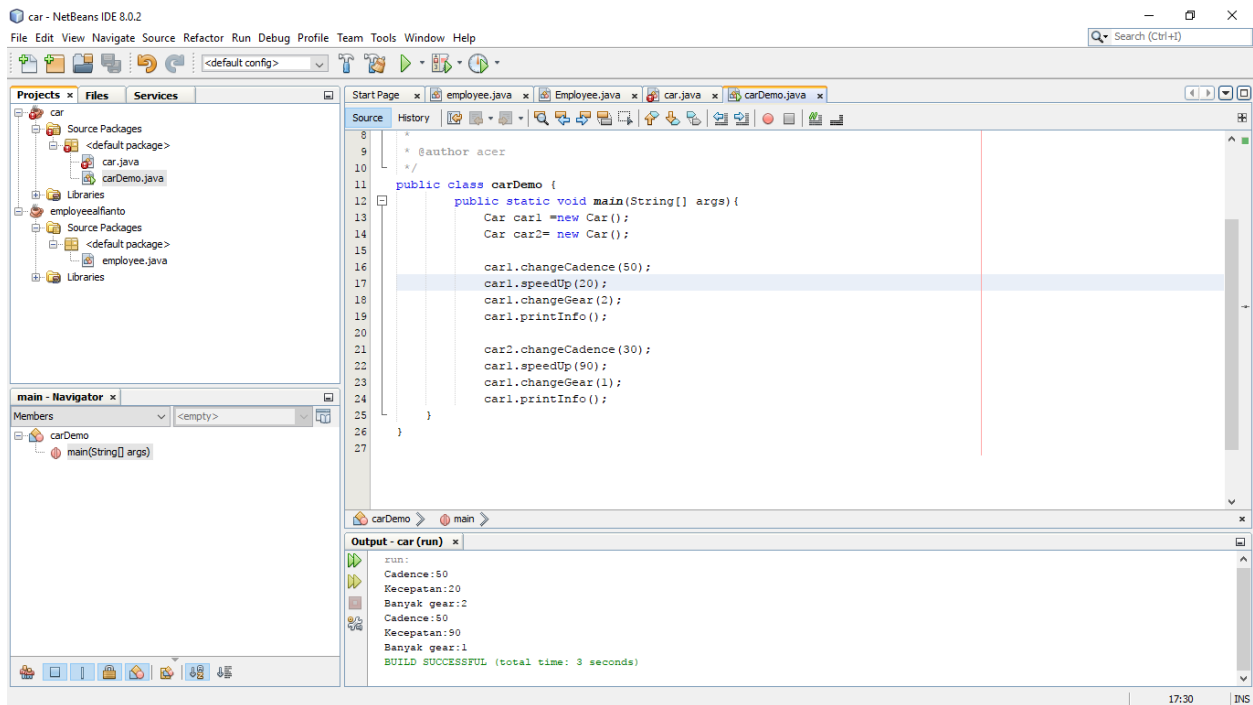
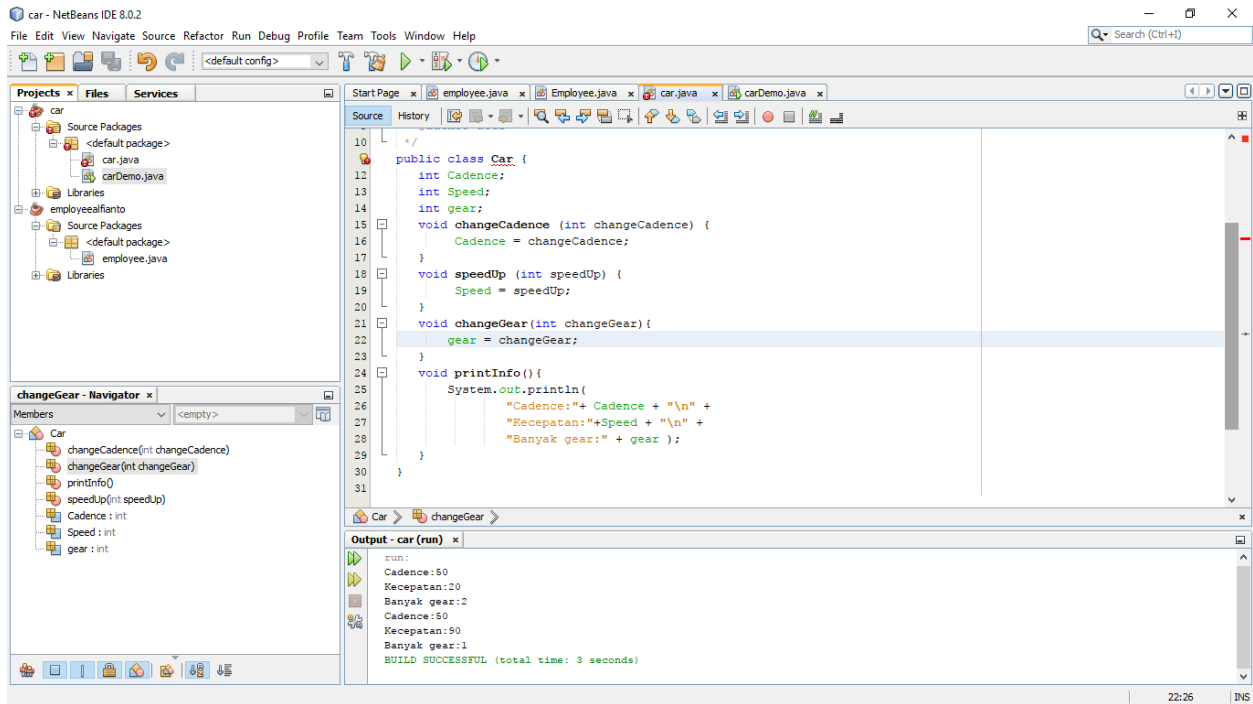



Latihan

1 car

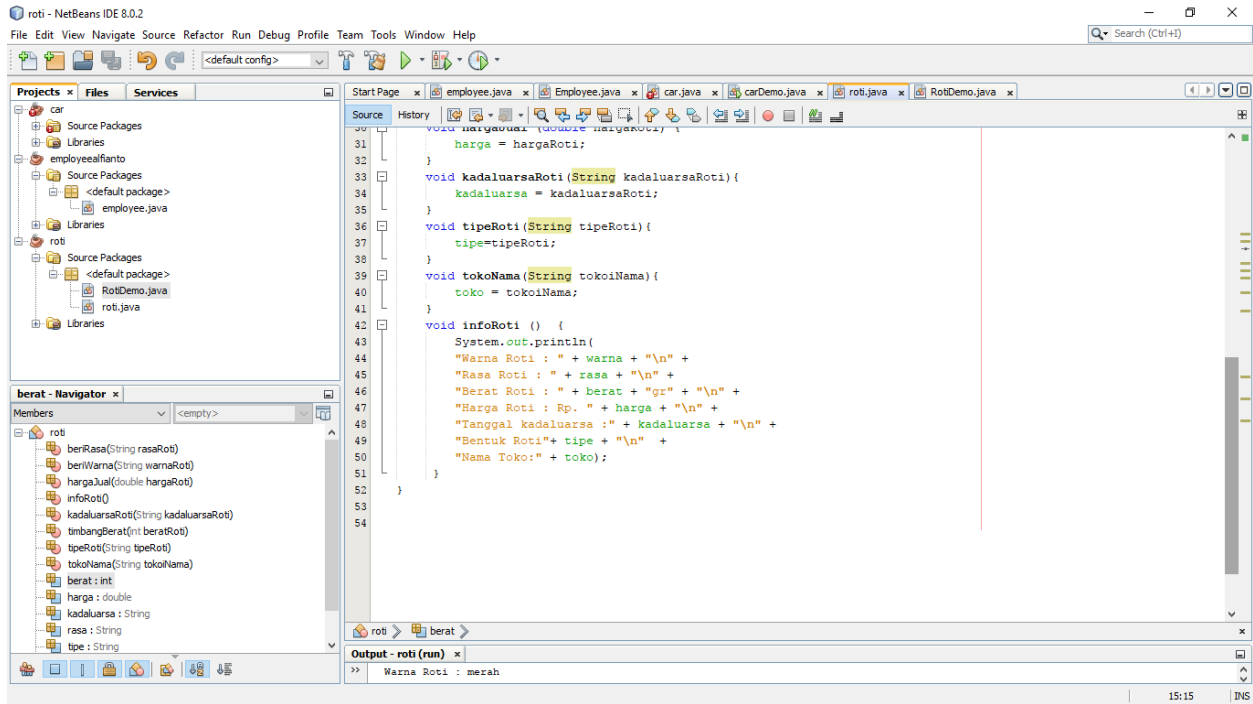



2. Roti

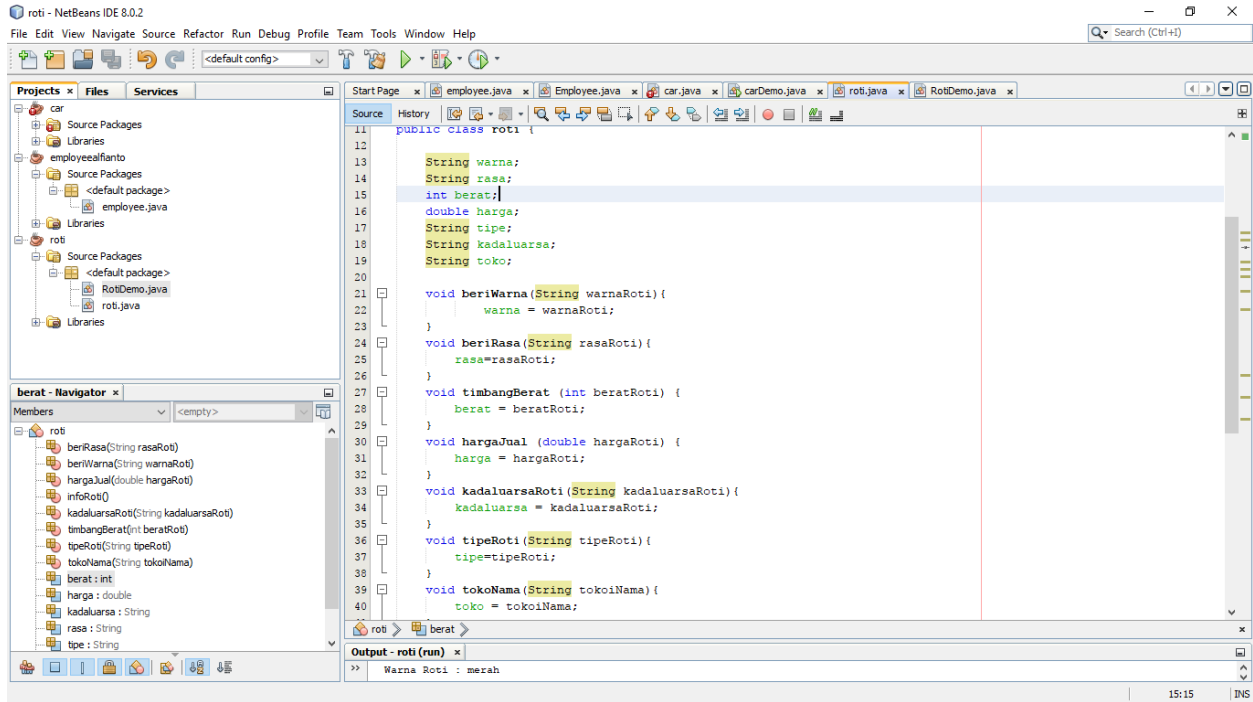

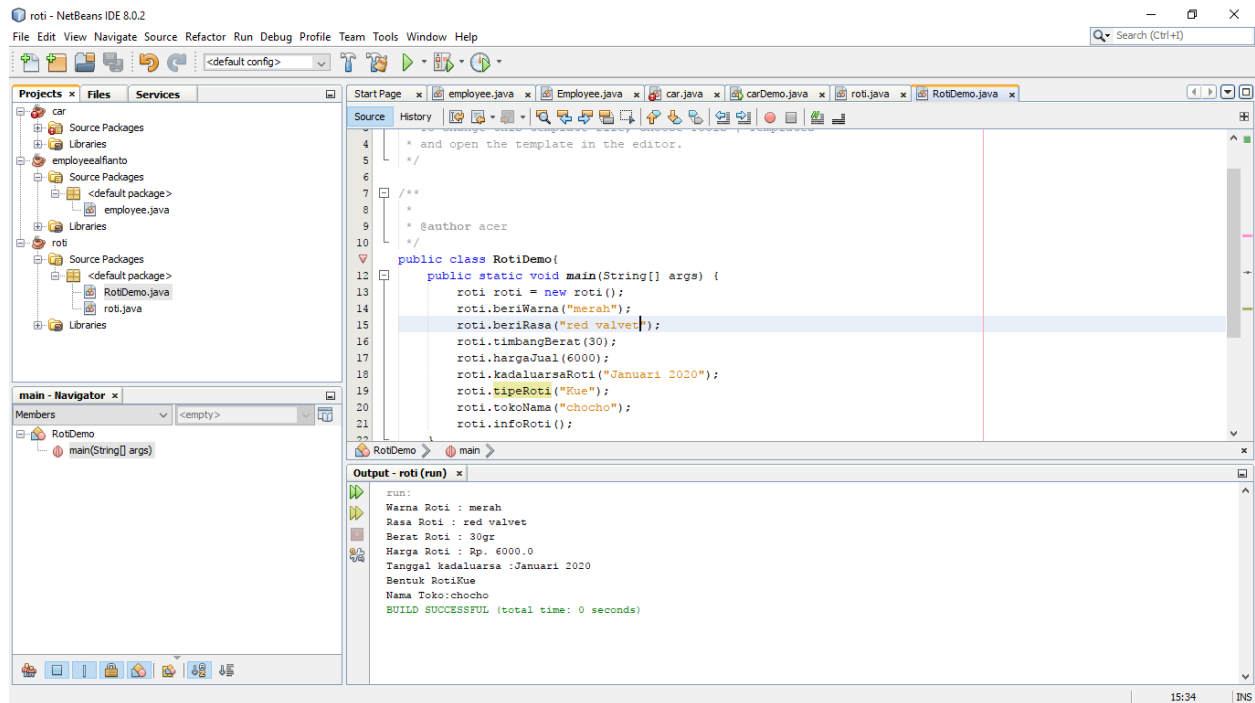




Kucing

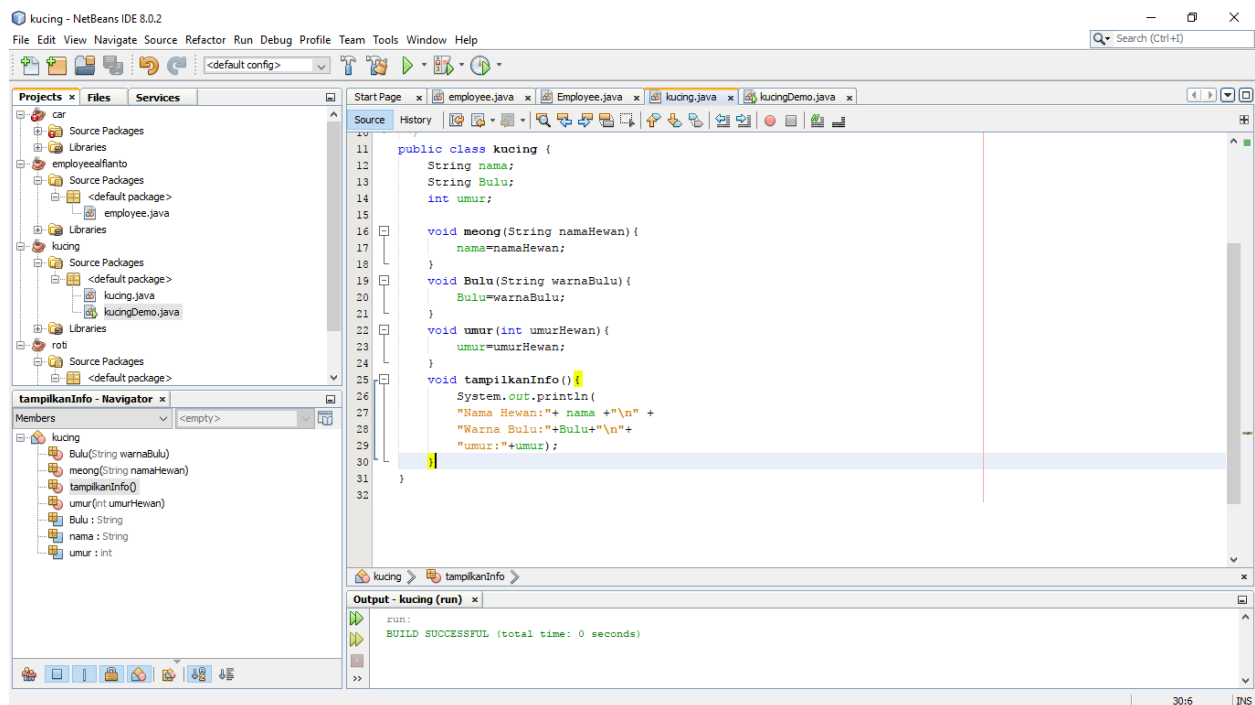

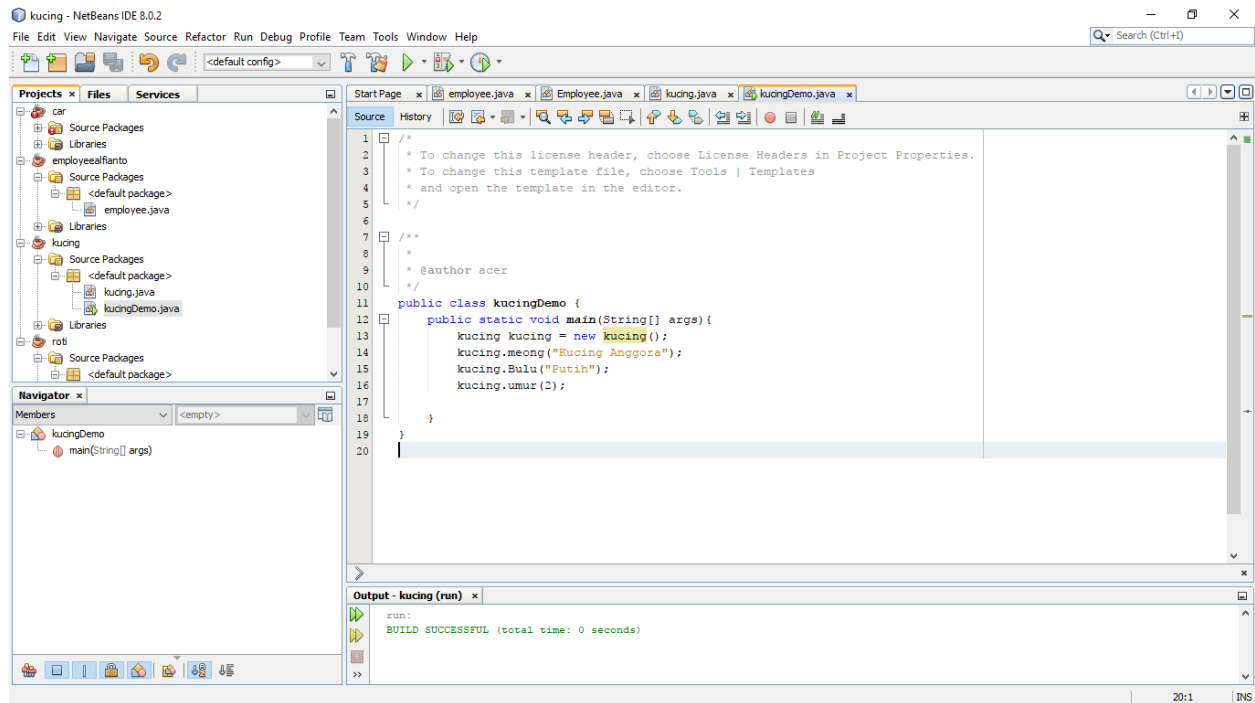

Rekening

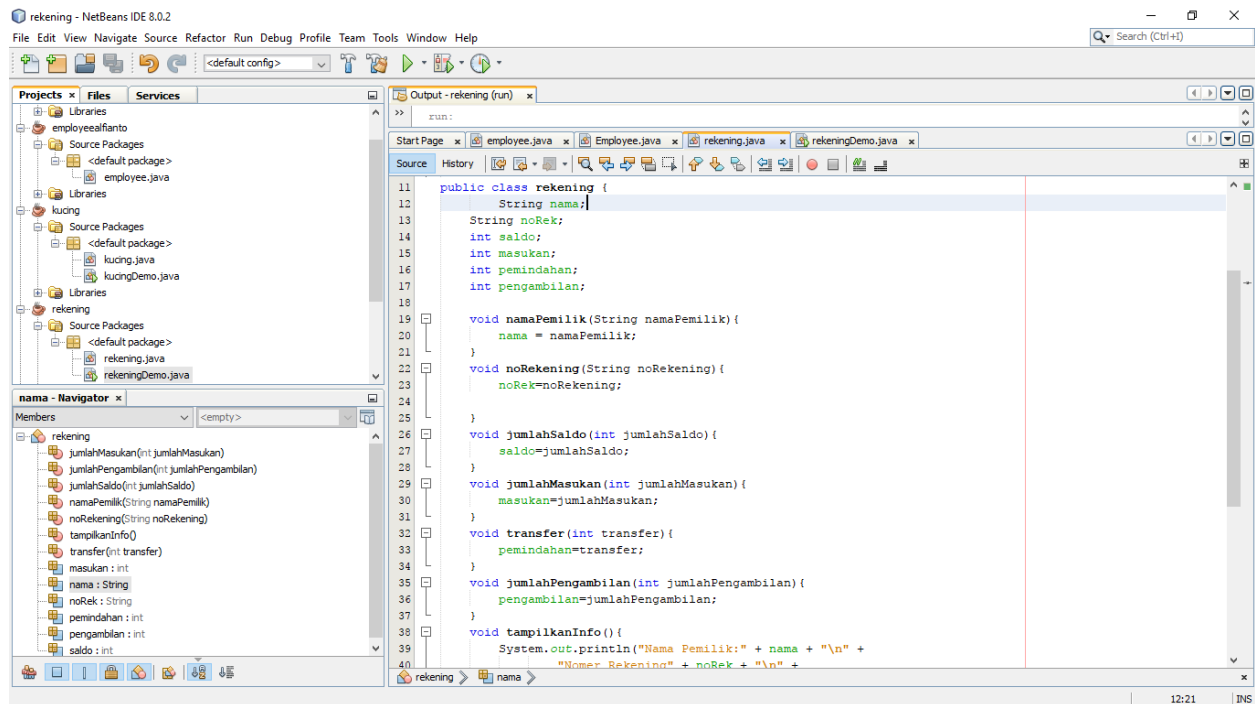

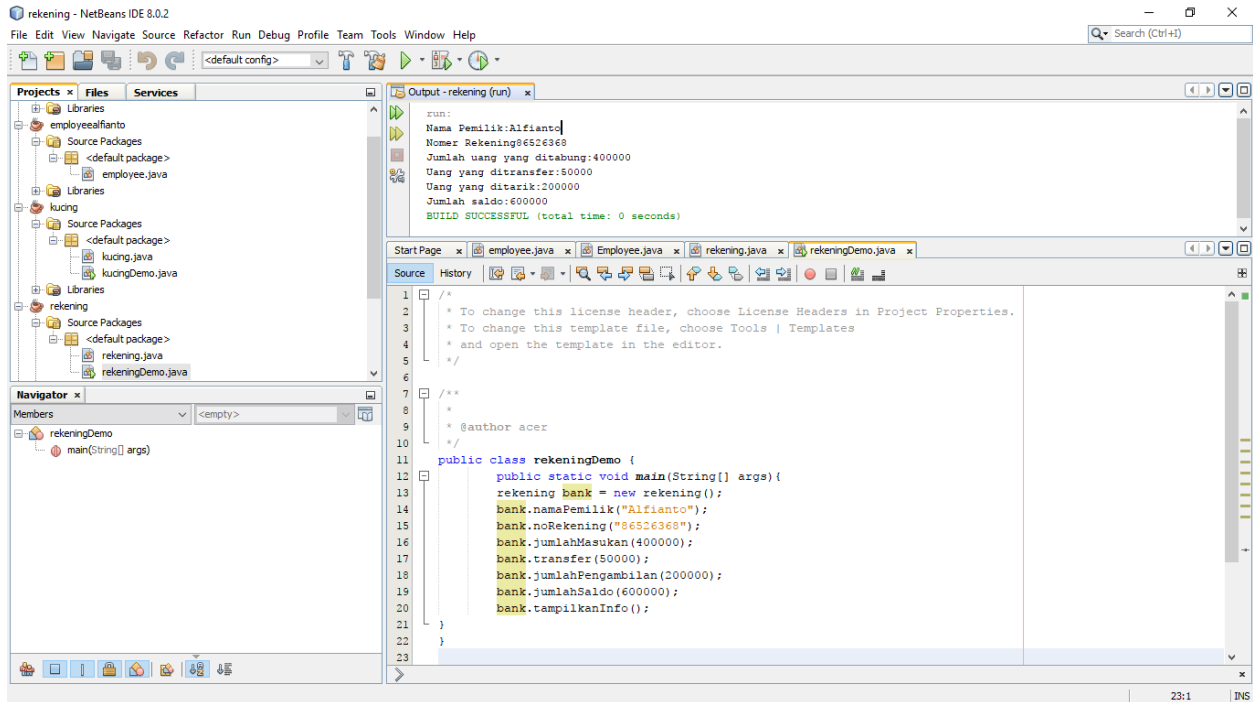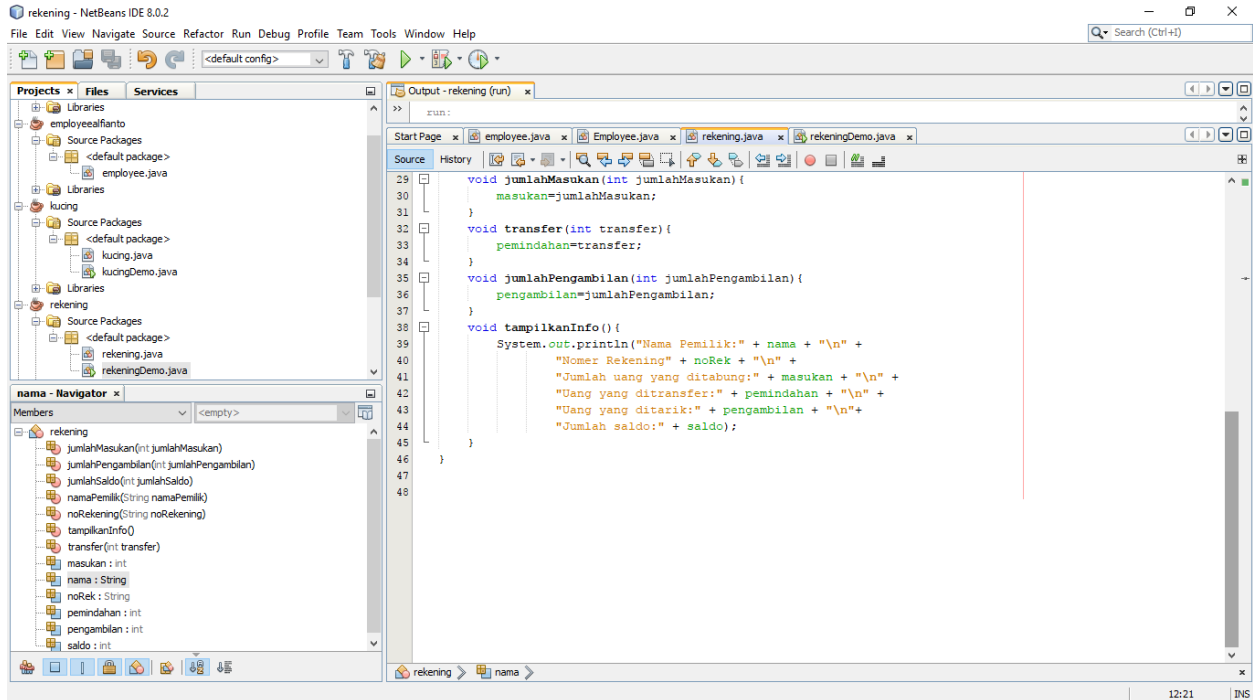

TUGAS PR 1

Khumaila - NetBeans IDE 8.2

File Edit View Navigate Source Refactor Run Debug Profile Team Tools Window Help

The screenshot shows the NetBeans IDE interface. The left sidebar contains the 'Projects' and 'Source Packages' views. The 'Source Packages' view shows a package named 'Khumaila' with several classes, including 'Hevan'. The 'Source' view displays the code for the 'Hevan' class, which includes methods for setting name, number of floors, location, and type, as well as a 'PrintClass' method. The 'Output' window shows the results of running the 'Hevan' class, displaying the values of the attributes: Name: Hevan, Jumlah Fk: 4, Lokasi: Daging, and Tipe: Ransilvora. The 'Run' button is highlighted in the toolbar.

```
1 public class Hevan {
2     String Nama, Lokasi, Tipe;
3     int Fkaki;
4     void Inama (String namaHevan){
5         Nama = namaHevan;
6     }
7     void Jkaki (int JumlahFkaki){
8         Fkaki = JumlahFkaki;
9     }
10    void MLokasi (String Lokasi){
11        Lokasi = Lokasi;
12    }
13    void Tipe (String Tipe){
14        Tipe = Tipe;
15    }
16    void PrintClass(){
17        System.out.println("Nama Hevan : "+Nama+"\n");
18        System.out.println("Jumlah Fk : "+Fkaki+"\n");
19        System.out.println("Lokasi : "+Lokasi+"\n");
20        System.out.println("Tipe Hevan : "+Tipe);
21    }
22 }
23
24
```

Output - Khumaila (run) X

```
Run
Name Hevan : Hevan
Jumlah Fk : 4
Lokasi : Daging
Tipe Hevan : Ransilvora

Name Hevan : Hevan
Jumlah Fk : 4
Lokasi : Daging
Tipe Hevan : Ransilvora

BUILD SUCCESSFUL (total time: 1 second)
```

Khumaila - NetBeans IDE 8.2

File Edit View Navigate Source Refactor Run Debug Profile Team Tools Window Help

The screenshot shows the NetBeans IDE interface. The left sidebar contains the 'Projects' and 'Source Packages' views. The 'Source Packages' view shows a package named 'Khumaila' with several classes, including 'HevanDemo'. The 'Source' view displays the code for the 'HevanDemo' class, which includes a 'main' method that creates an instance of the 'Hevan' class and calls its 'PrintClass' method. The 'Output' window shows the results of running the 'HevanDemo' class, displaying the values of the attributes: Name: Hevan, Jumlah Fk: 4, Lokasi: Daging, and Tipe: Ransilvora. The 'Run' button is highlighted in the toolbar.

```
1 public class HevanDemo {
2     public static void main(String[] args) {
3         Hevan Hevan = new Hevan();
4         Hevan Hevan = new Hevan();
5
6         Hevan.Inama("Hevan");
7         Hevan.Jkaki(4);
8         Hevan.MLokasi("Daging");
9         Hevan.Tipe("Ransilvora");
10
11        Hevan.hName("Hevan");
12        Hevan.Jkaki(4);
13        Hevan.Lokasi("Daging");
14        Hevan.Type("Ransilvora");
15
16        Hevan.PrintClass();
17        System.out.println("\n");
18        Hevan.PrintClass();
19        System.out.println("\n");
20    }
21 }
22
```

Output - Khumaila (run) X

```
Run
Name Hevan : Hevan
Jumlah Fk : 4
Lokasi : Daging
Tipe Hevan : Ransilvora

Name Hevan : Hevan
Jumlah Fk : 4
Lokasi : Daging
Tipe Hevan : Ransilvora

BUILD SUCCESSFUL (total time: 1 second)
```

pr 2

