

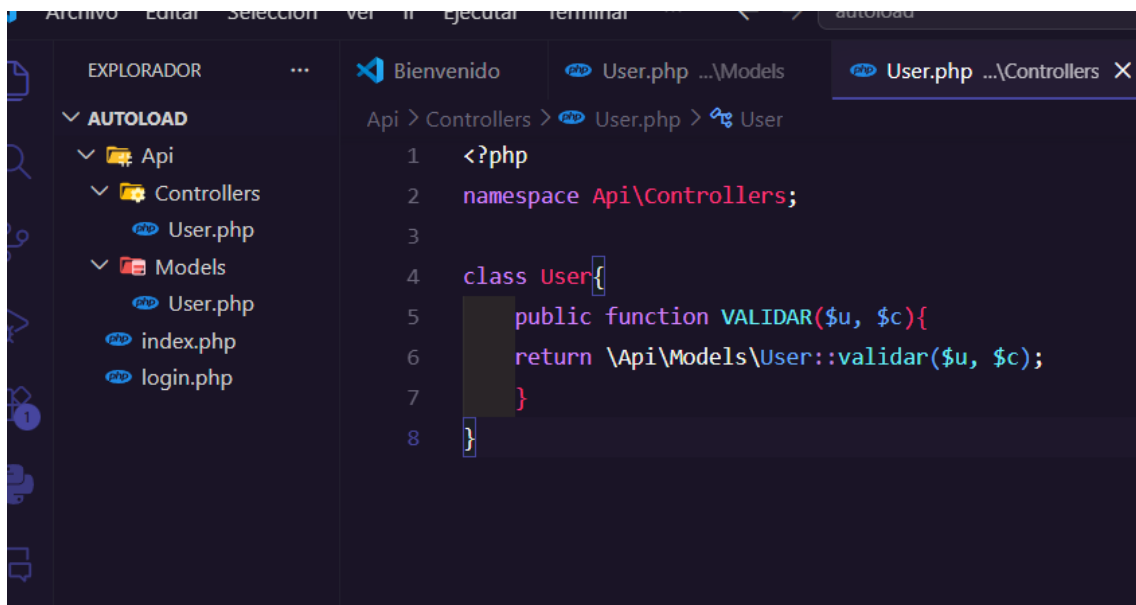



Documentación:

Estructura:

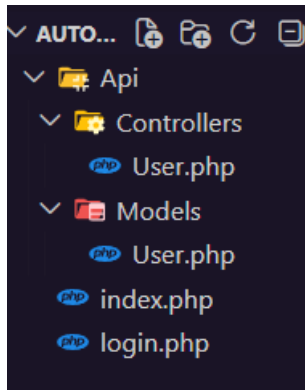

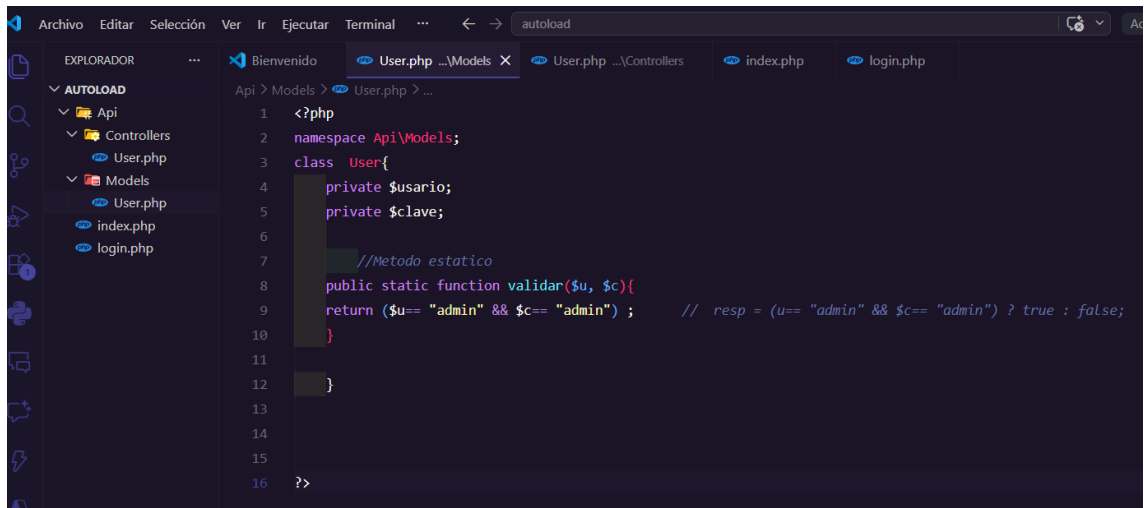


```
1 <?php
2 namespace Api\Models;
3 class User{
4     private $usuario;
5     private $clave;
6
7     //Metodo estatico
8     public static function validar($u, $c){
9         return ($u== "admin" && $c== "admin") ;    // resp = (u== "admin" && $c== "admin") ? true : false;
10    }
11
12 }
13
14
15
16 ?>
```

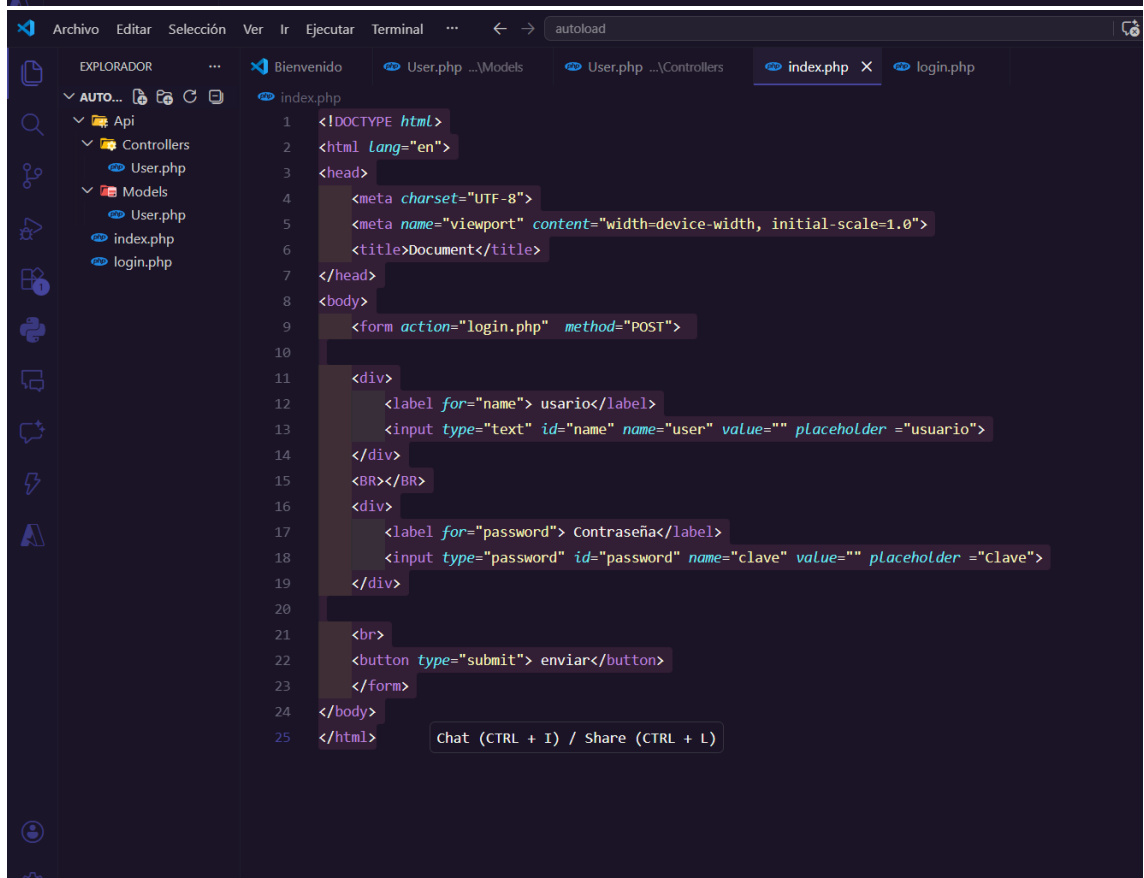

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>Document</title>
7 </head>
8 <body>
9     <form action="login.php" method="POST">
10
11     <div>
12         <label for="name"> usuario</label>
13         <input type="text" id="name" name="user" value="" placeholder ="usuario">
14     </div>
15     <BR></BR>
16     <div>
17         <label for="password"> Contraseña</label>
18         <input type="password" id="password" name="clave" value="" placeholder ="Clave">
19     </div>
20
21     <br>
22     <button type="submit"> enviar</button>
23 </form>
24 </body>
25 </html>
```

Chat (CTRL + I) / Share (CTRL + L)

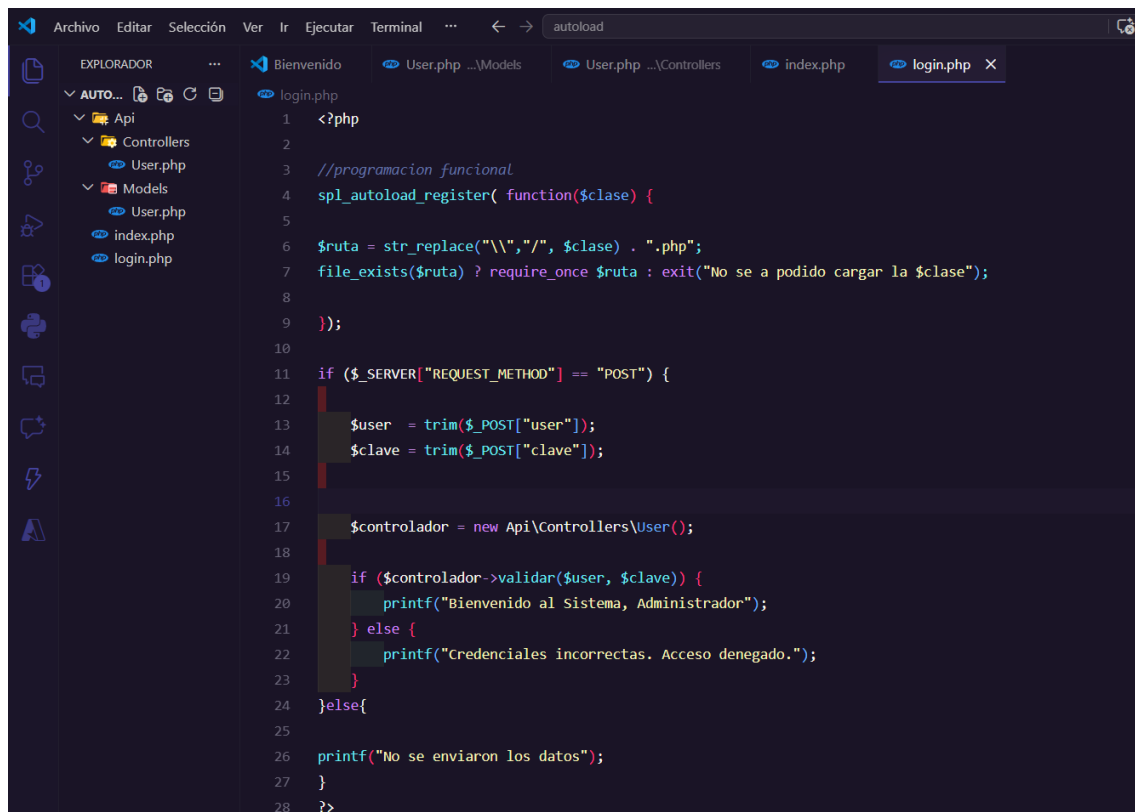

The image shows a screenshot of an IDE (Visual Studio Code) with a dark theme. The top menu bar includes 'Archivo', 'Editar', 'Selección', 'Ver', 'Ir', 'Ejecutar', 'Terminal', and a search icon. The breadcrumb at the top right shows the file path: 'autoload'. The Explorer sidebar on the left shows a project structure with folders 'Api' and 'Models', and files 'User.php', 'index.php', and 'login.php'. The main editor window displays the code for 'login.php'. The code is a PHP script that implements a login function using the SPL Autoload mechanism. It starts with a PHP opening tag, followed by a comment '//programacion funcional'. It then registers an autoload function using 'spl_autoload_register'. The function takes a class name and constructs a file path by replacing backslashes with forward slashes and appending '.php'. It checks if the file exists and includes it using 'require_once'. After the autoload function is defined, it checks if the request method is 'POST'. If so, it trims the 'user' and 'clave' (password) from the POST data. It then creates a new instance of the 'Api\Controlllers\User()' class. The 'validar' method of this class is called with the user and password. If the method returns true, it prints 'Bienvenido al Sistema, Administrador'. Otherwise, it prints 'Credenciales incorrectas. Acceso denegado.'. If the request method is not 'POST', it prints 'No se enviaron los datos'.

```
1 <?php
2
3 //programacion funcional
4 spl_autoload_register( function($clase) {
5
6     $ruta = str_replace("\\", "/", $clase) . ".php";
7     file_exists($ruta) ? require_once $ruta : exit("No se a podido cargar la $clase");
8
9 });
10
11 if ($_SERVER["REQUEST_METHOD"] == "POST") {
12
13     $user = trim($_POST["user"]);
14     $clave = trim($_POST["clave"]);
15
16
17     $controlador = new Api\Controlllers\User();
18
19     if ($controlador->validar($user, $clave)) {
20         printf("Bienvenido al Sistema, Administrador");
21     } else {
22         printf("Credenciales incorrectas. Acceso denegado.");
23     }
24 }else{
25
26     printf("No se enviaron los datos");
27 }
28 ?>
```