




Training VGG-16 on CUB200-2011

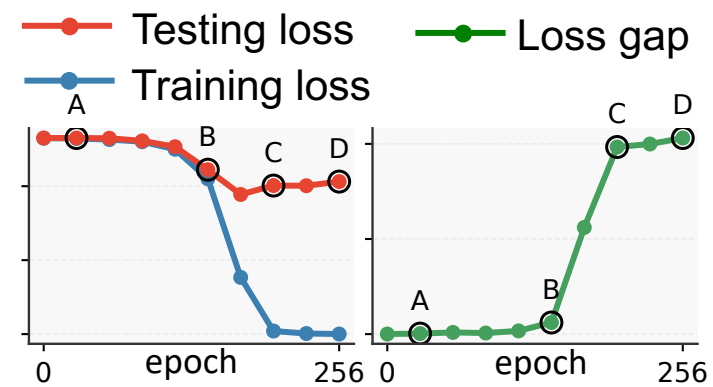


Training VGG-11 on CIFAR-10

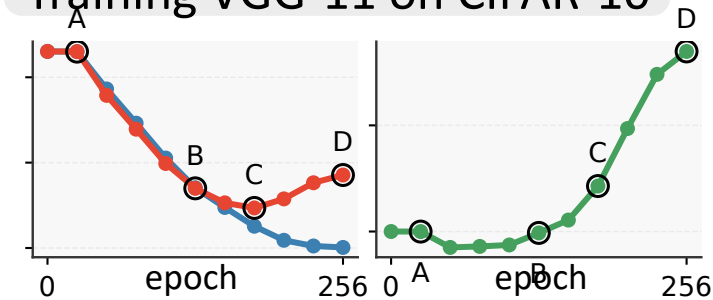

The raw interaction distributions of timepoints A, B, C, D

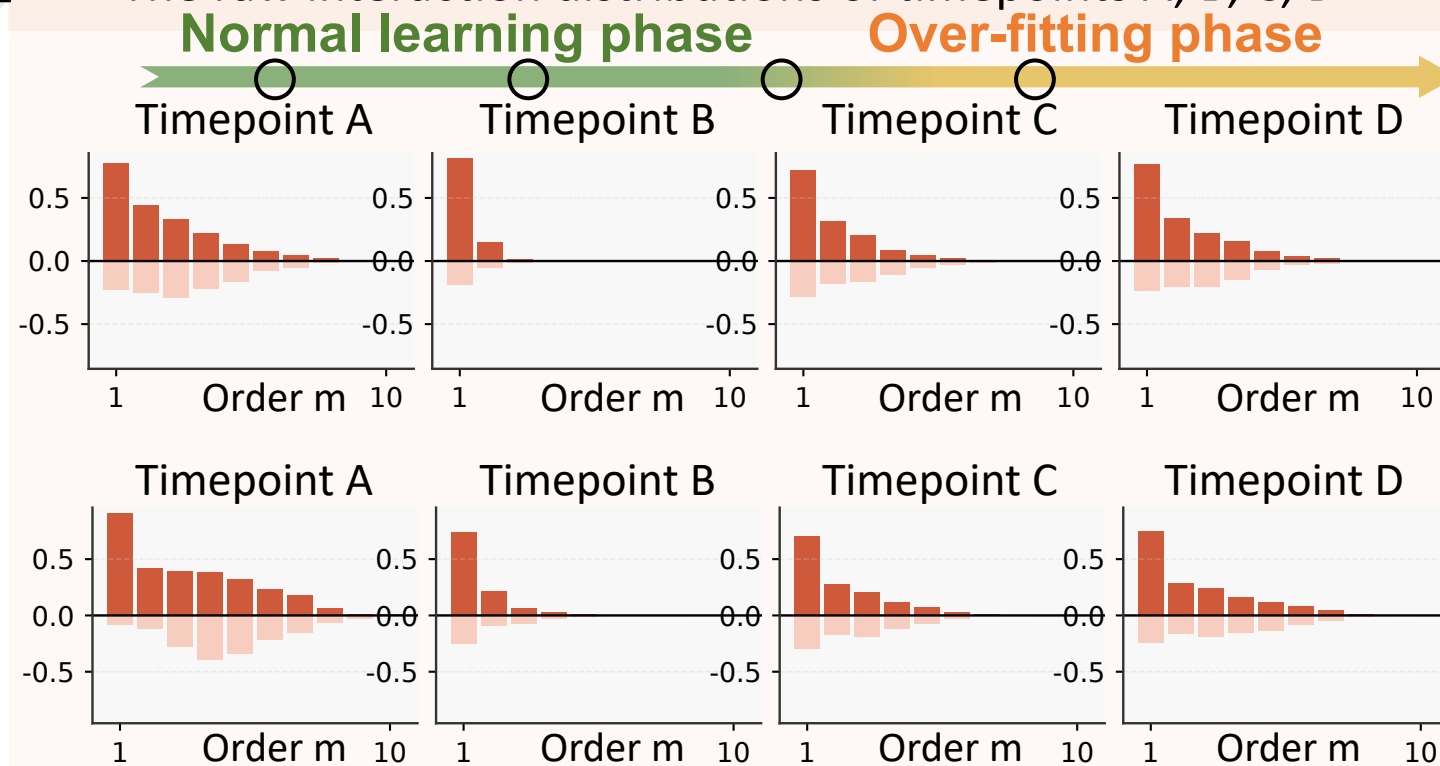

(Newly emerged interaction w.r.t. B)

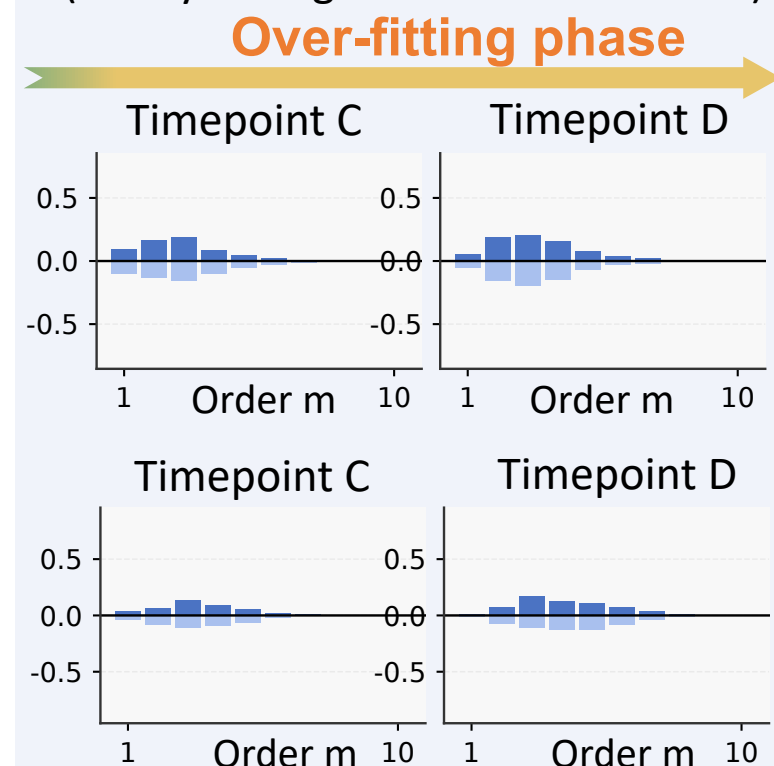

Caption: Overfitting-phase analysis. From left to right, we present the training dynamics, the raw interaction distributions at time points A, B, C, and D, and the newly emerged interaction distributions defined by the differences between C and B, and D and B. The newly emerged interactions exhibit a clear spindle-shaped pattern, supporting the view that overfitting primarily introduces noise-like interactions.