



Generalizable interaction distribution using different baseline DNNs

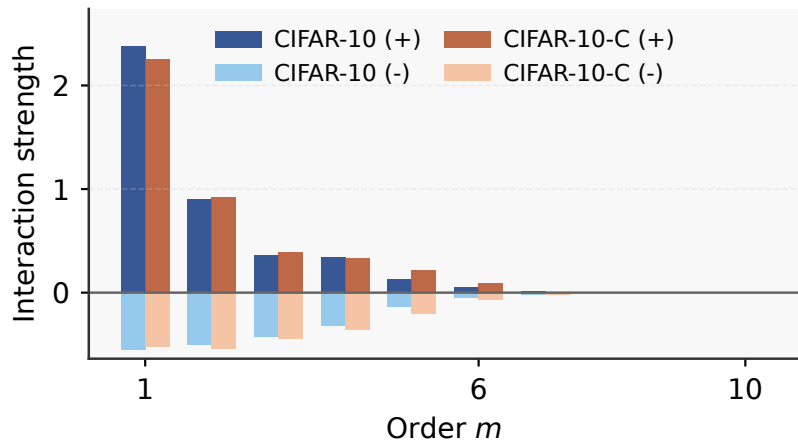

Correlation analysis

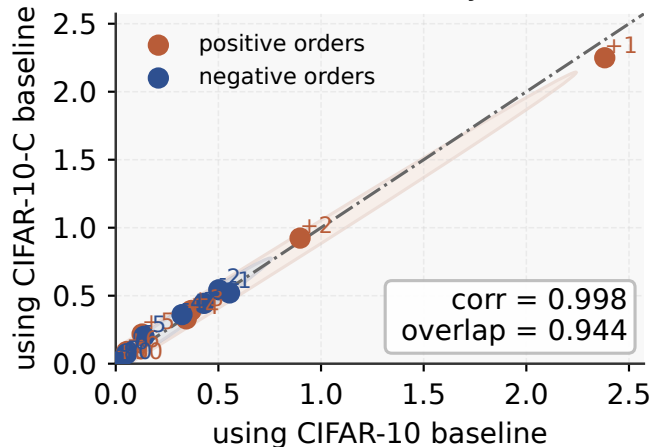

Caption. (Left) Generalizable interaction distributions identified using baseline DNNs trained on CIFAR-10 and its distribution-shifted variant CIFAR-10-C. (Right) Correlation analysis between generalizable interaction distribution extracted from CIFAR-10 and CIFAR-10-C baselines. Each point represents an interaction order, with orange and blue markers indicating positive and negative orders, respectively. The results report the high correlation coefficient ($r=0.998$) and substantial overlap (0.944), measured by the Jaccard similarity between the generalizable interaction distribution identified from CIFAR-10 and CIFAR-10-C baselines. This indicates that the identified generalizable interactions remain highly consistent despite dataset distribution shift.