

bootstrap

1. 版本 版本 版本
2. 3 4 5
3. 用複製貼上的 不是用打的
4. debug 三分鐘以上 請重新去官網or w3schools 重新copy

1.載入css/js

▼ Getting started

Introduction

Download

Contents

Browsers & devices

JavaScript

Build tools

Webpack

Parcel

Accessibility

RFS

RTL

> Customize

> Layout

> Content

> Forms

> Components

> Helpers

> Utilities

> Extend

> About

Migration

└─ bootstrap.js.map

└─ bootstrap.min.js

└─ bootstrap.min.js.map

This is the most basic form of Bootstrap: precompiled files for quick drop-in usage in nearly any web project. We provide compiled CSS and JS (`bootstrap.*`), as well as compiled and minified CSS and JS (`bootstrap.min.*`). [Source maps](#) (`bootstrap.*.map`) are available for use with certain browsers' developer tools. Bundled JS files (`bootstrap.bundle.js` and minified `bootstrap.bundle.min.js`) include [Popper](#).

CSS files

Bootstrap includes a handful of options for including some or all of our compiled CSS.

| CSS files | Layout | Content | Components | Utilities |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-----------------------------|------------|-------------------------------------|
| <code>bootstrap.css</code> <code>bootstrap.rtl.css</code> <code>bootstrap.min.css</code> <code>bootstrap.rtl.min.css</code> | Included | Included | Included | Included |
| <code>bootstrap-grid.css</code> <code>bootstrap-grid.rtl.css</code> <code>bootstrap-grid.min.css</code> <code>bootstrap-grid.rtl.min.css</code> | Only grid system | — | — | Only flex utilities |
| <code>bootstrap-utilities.css</code> <code>bootstrap-utilities.rtl.css</code> <code>bootstrap-utilities.min.css</code> <code>bootstrap-utilities.rtl.min.css</code> | — | — | — | Included |
| <code>bootstrap-reboot.css</code> <code>bootstrap-reboot.rtl.css</code> <code>bootstrap-reboot.min.css</code> <code>bootstrap-reboot.rtl.min.css</code> | — | Only Reboot | — | — |

On this page

Precompiled

CSS files

JS files

Bootstrap source

JS files

Similarly, we have options for including some or all of our compiled JavaScript.

| JS files | Popper |
|--------------------------------------------------------------------------|----------|
| <code>bootstrap.bundle.js</code> <code>bootstrap.bundle.min.js</code> | Included |
| <code>bootstrap.js</code> <code>bootstrap.min.js</code> | — |

2.container > row > col


3.不要修改底層bs

4.要修改 自己增加css

5.gird system 12

6. row -> display:flex

7. mobile first

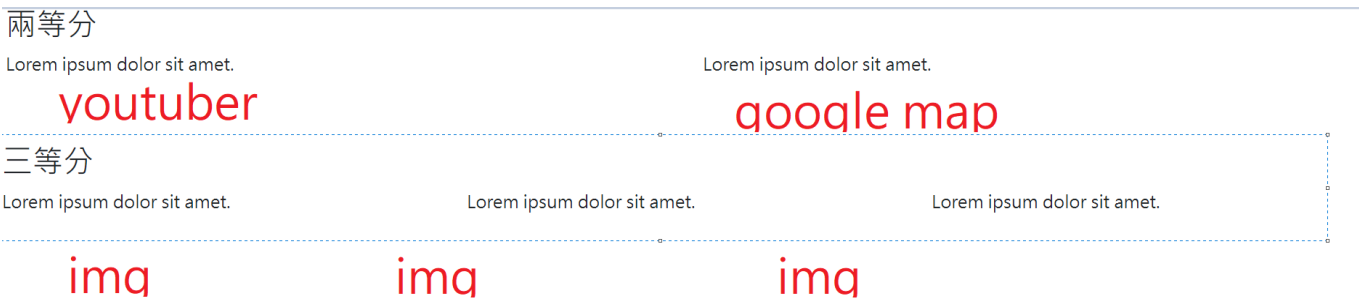

更改顏色 可以使用style修改

```
<style>
  .box{
    /* width: 200px; */
    height: 33vh;
  }
  /* 自訂顏色 */
  .bg-self-pink{
    background-color:  lightpink;
  }
</style>
```

```
<div class="row">
  <div class="col box bg-dark"></div>
  <div class="col box bg-light"></div>
  <div class="col box bg-self-pink">自訂</div>
</div>
```

▼ Components

Accordion

Alerts

Badge

Breadcrumb

Buttons

Button group

Card

Carousel

Close button

Collapse

Dropdowns

List group

Modal

Navs & tabs

Navbar

Offcanvas

Pagination

Popovers

Progress

Scrollspy

Spinners

Toasts

Tooltips

▼ Utilities

API

Background

Borders

Colors

Display

Flex

Float

Interactions

Overflow

Position

Shadows

Sizing

Spacing

Text

Vertical align

Visibility