

## External(on-disk) Sorting

### Chapter 13

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke
1

1

---

---

---


---

---

---

---

---



## Why Sort?

- ❖ A classic problem in computer science!
- ❖ Data requested in sorted order
  - e.g., find students in increasing *gpa* order
- ❖ Sorting is first step in *bulk loading* B+ tree index.
- ❖ Sorting useful for eliminating *duplicate copies* in a collection of records (Why?)
- ❖ *Sort-merge* join algorithm involves sorting.

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke
2

2

---

---

---


---

---

---


---

---



## 2-Way Sort: Requires 3 Buffers

- ❖ Pass 1: Read a page, sort it, write it.
  - only one buffer page is used
- ❖ Pass 2, 3, ..., etc.:
  - three buffer pages used.

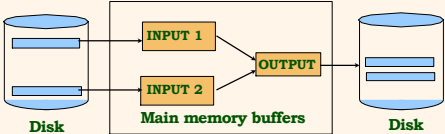

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke
3

3

---

---

---

---

---


---

---

---

## Two-Way External Merge Sort

- ❖ Each pass we read + write each page in file.
- ❖  $N$  pages in the file  $\Rightarrow$  the number of passes  $= \lceil \log_2 N \rceil + 1$
- ❖ So total cost is:  
$$2N(\lceil \log_2 N \rceil + 1)$$
- ❖ Idea: Divide and conquer: sort subfiles and merge

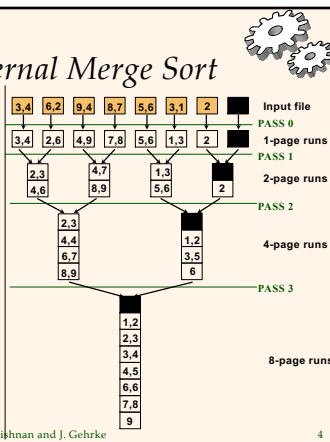

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

4

4

why +1? because the first pass we need to sort each page locally


how many pages we need to do this merge sort?

A: 3: 1 for left input page, 1 for right input page, 1 for output page

## General External Merge Sort

➡ **More than 3 buffer pages. How can we utilize them?**

- ❖ To sort a file with  $N$  pages using  $B$  buffer pages:
  - **Pass 0**: use  $B$  buffer pages. Produce  $\lceil N / B \rceil$  sorted runs of  $B$  pages each.
  - **Pass 2, ..., etc.:** merge  $B-1$  runs.

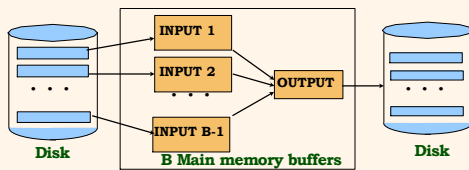

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

5

5

## Cost of External Merge Sort

- ❖ Number of passes:  $1 + \lceil \log_{B-1} \lceil N / B \rceil \rceil$
- ❖ **Cost** =  $2N * (\text{\# of passes})$
- ❖ E.g., with 5 buffer pages, to sort 108 page file:
  - Pass 0:  $\lceil 108 / 5 \rceil = 22$  sorted runs of 5 pages each (last run is only 3 pages)
  - Pass 1:  $\lceil 22 / 4 \rceil = 6$  sorted runs of 20 pages each (last run is only 8 pages)
  - Pass 2: 2 sorted runs, 80 pages and 28 pages
  - Pass 3: Sorted file of 108 pages

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

6

6

## Number of Passes of External Sort

N	B=3	B=5	B=9	B=17	B=129	B=257
100	7	4	3	2	1	1
1,000	10	5	4	3	2	2
10,000	13	7	5	4	2	2
100,000	17	9	6	5	3	3
1,000,000	20	10	7	5	3	3
10,000,000	23	12	8	6	4	3
100,000,000	26	14	9	7	4	4
1,000,000,000	30	15	10	8	5	4

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

7

7

---

---

---

---

---

---

---

---

## Internal Sort Algorithm

- ❖ Quicksort is a fast way to sort in memory.
- ❖ An alternative is "tournament sort" (a.k.a. "heapsort")
  - **Top**: Read in  $B$  blocks
  - **Output**: move smallest record to output buffer
  - Read in a new record  $r$
  - insert  $r$  into "heap"
  - if  $r$  not smallest, then **GOTO Output**
  - else remove  $r$  from "heap"
  - output "heap" in order; **GOTO Top**

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

8

8

---

---

---

---

---



---

---

---

## More on Heapsort

- ❖ Fact: average length of a run in heapsort is  $2B$ 
  - The "snowplow" analogy
- ❖ Worst-Case:
  - What is min length of a run?
  - How does this arise?
- ❖ Best-Case:
  - What is max length of a run?
  - How does this arise?
- ❖ Quicksort is faster, but ...



Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

9

9

---

---

---

---

---

---

---

---

## I/O for External Merge Sort

- ❖ ... longer runs often means fewer passes!
- ❖ Actually, do I/O a page at a time
- ❖ In fact, read a block of pages sequentially!
- ❖ Suggests we should make each buffer (input/output) be a block of pages.
  - But this will reduce fan-out during merge passes!
  - In practice, most files still sorted in 2-3 passes.

10

## Number of Passes of Optimized Sort


N	B=1,000	B=5,000	B=10,000
100	1	1	1
1,000	1	1	1
10,000	2	2	1
100,000	3	2	2
1,000,000	3	2	2
10,000,000	4	3	3
100,000,000	5	3	3
1,000,000,000	5	4	3

➡ Block size = 32, initial pass produces runs of size  $2B$ .

11

## Double Buffering

- ❖ To reduce wait time for I/O request to complete, can prefetch into 'shadow block'.
  - Potentially, more passes; in practice, most files still sorted in 2-3 passes.

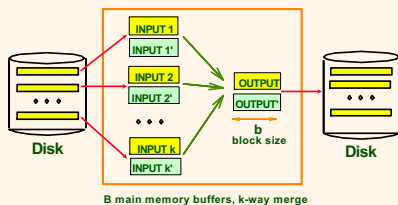

12

as we start sorting the yellow pages,  
starts to fetch green pages

## Sorting Records!



- ❖ Sorting has become a blood sport!
  - Parallel sorting is the name of the game ...
- ❖ Datamation: Sort 1M records of size 100 bytes
  - Typical DBMS: 15 minutes
  - World record: 3.5 *seconds*
    - 12-CPU SGI machine, 96 disks, 2GB of RAM
- ❖ New benchmarks proposed:
  - Minute Sort: How many can you sort in 1 minute?
  - Dollar Sort: How many can you sort for \$1.00?

13

---

---

---

---

---

---

---

## Using B+ Trees for Sorting



- ❖ Scenario: Table to be sorted has B+ tree index on sorting column(s).
- ❖ *Idea*: Can retrieve records in order by traversing leaf pages.
- ❖ *Is this a good idea?*
- ❖ Cases to consider:
  - B+ tree is *clustered* *Good idea!*
  - B+ tree is *not clustered* *Could be a very bad idea!*

14

---

---

---

---

---


---

---

## Clustered B+ Tree Used for Sorting



- ❖ Cost: root to the left-most leaf, then retrieve all leaf pages (Alternative 1)
- ❖ If Alternative 2 is used? Additional cost of retrieving data records: each page fetched just once.



➡ *Always better than external sorting!*

15

---

---

---

---


---

---

---

## Unclustered B+ Tree Used for Sorting

- ❖ Alternative (2) for data entries; each data entry contains *rid* of a data record. In general, **one I/O per data record!**



Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

16

16

---

---

---

---

---

---

---

---

## External Sorting vs. Unclustered Index

N	Sorting	p=1	p=10	p=100
100	200	100	1,000	10,000
1,000	2,000	1,000	10,000	100,000
10,000	40,000	10,000	100,000	1,000,000
100,000	600,000	100,000	1,000,000	10,000,000
1,000,000	8,000,000	1,000,000	10,000,000	100,000,000
10,000,000	80,000,000	10,000,000	100,000,000	1,000,000,000

➤ N: number of pages

➤ p: # of records per page

➤ B=1,000 and block size=32 for sorting

17

17

if a page has x tuples:  
we need to touch x times per page.

While compared to external sorting, we only need to touch each page once

p=100 is the more realistic value.

---

---

---

---

---

---

---

---

## Summary

- ❖ External sorting is important; DBMS may dedicate part of buffer pool for sorting!
- ❖ External merge sort minimizes disk I/O cost:
  - Pass 0: Produces sorted *runs* of size B (# buffer pages). Later passes: *merge runs*.
  - # of runs merged at a time depends on B, and *block size*.
  - Larger block size means less I/O cost per page.
  - Larger block size means smaller # runs merged.
  - In practice, # of runs rarely more than 2 or 3.

Database Management Systems 3ed, R. Ramakrishnan and J. Gehrke

18

18

---

---

---

---

---

---

---

---

## *Summary, cont.*



- ❖ Choice of internal sort algorithm may matter:
  - Quicksort: Quick!
  - Heap/tournament sort: slower (2x), longer runs
- ❖ The best sorts are wildly fast:
  - Despite 40+ years of research, we're still improving!
- ❖ Clustered B+ tree is good for sorting; unclustered tree is usually very bad.

---

---

---

---

---

---

---