
Customer 360 database schema

`database-schema.sql` is the source of truth for this diagram. The diagrams below cover its 62 base tables, the 15 partitions of `graph_edges`, and both views. They show primary keys, tenant keys, important identifying columns, and declared foreign-key relationships; types are abbreviated for readability. They are not a substitute for the SQL definitions, which contain every exact type, column, check, index, trigger, and function.


All names are exact table or view names in the `customer360` schema. Where a relationship is tenant-scoped, the SQL uses a composite foreign key containing `tenant_id`; the diagram draws that relationship once rather than repeating `tenant_id` as a separate edge to `sys_tenant` in every subject area. Global dictionaries/catalogs that are not tenant-owned do not have a tenant edge.

1. Tenant, organization, users, and access control

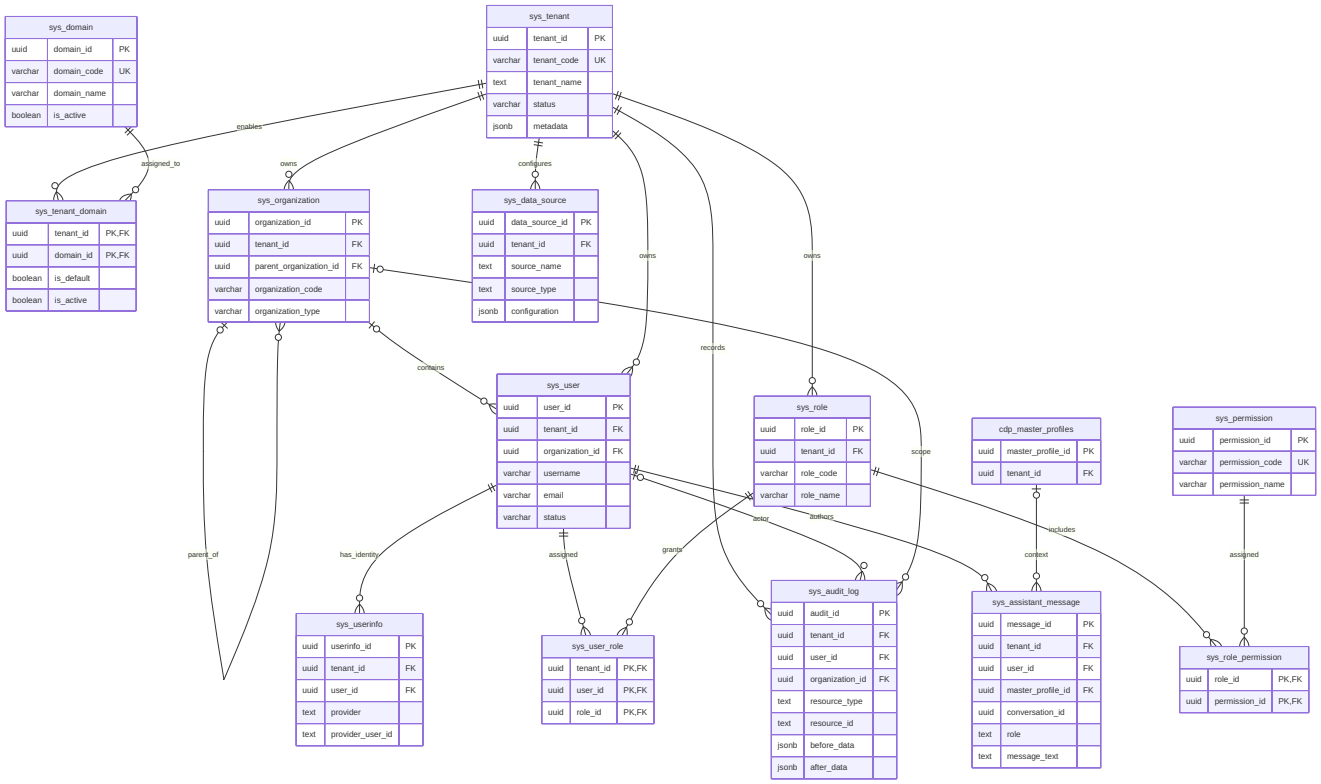


`sys_permission` is global. `sys_domain` is a global dictionary; `sys_tenant_domain` associates domains with tenants. User-to-role, role-to-permission, and tenant-domain associations use composite primary keys.

2. CRM sales entities

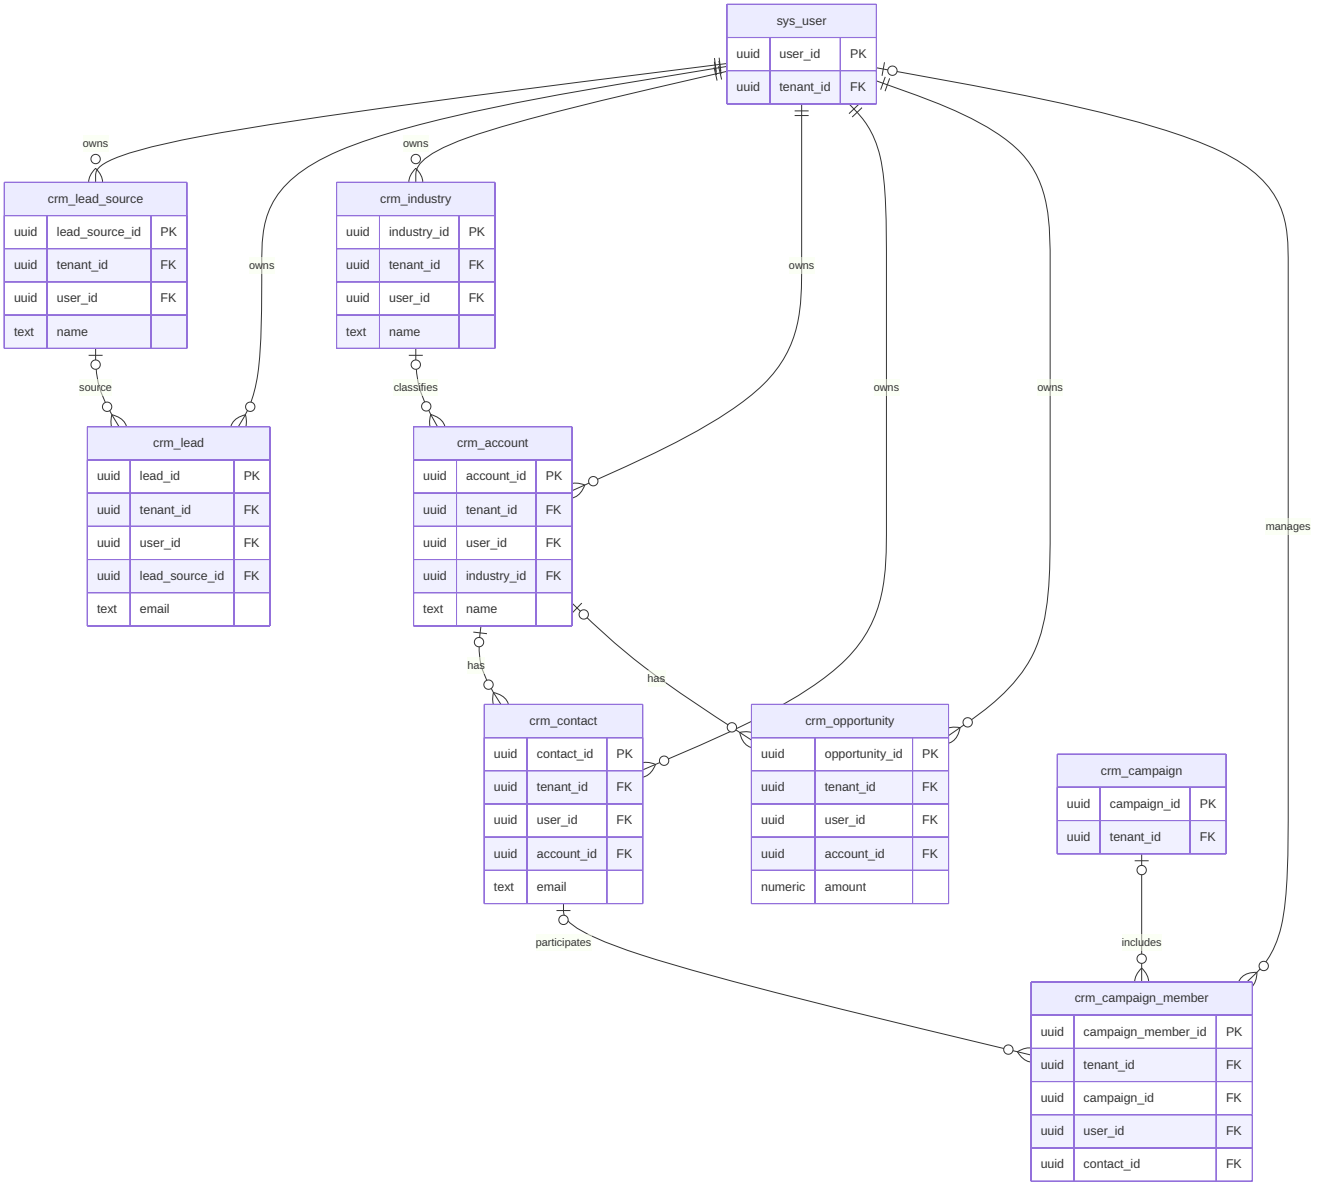


Tenant-consistent composite foreign keys in the SQL reinforce the CRM references shown above. Nullable owners, account links, and lead sources remain optional.

3. CDP profiles and identity resolution

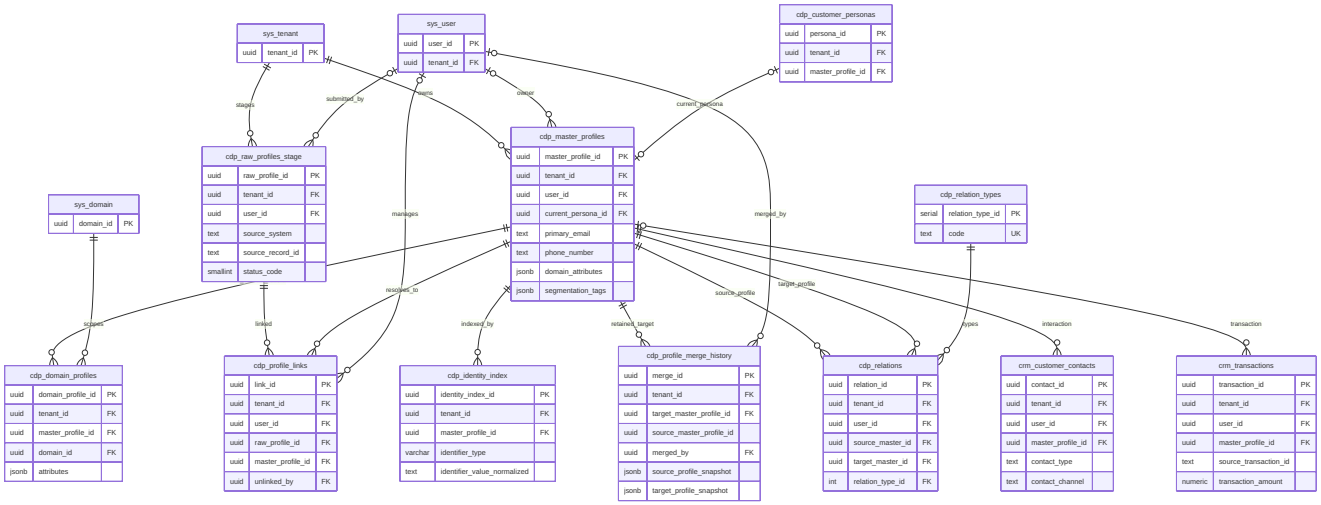


`source_master_profile_id` in `cdp_profile_merge_history` is intentionally not a foreign key: the merged source profile may no longer exist. `cdp_master_profiles` and `cdp_raw_profiles_stage` are wide ingestion/identity records; only relationship and identifying fields are expanded here.

4. Personas and AI metadata

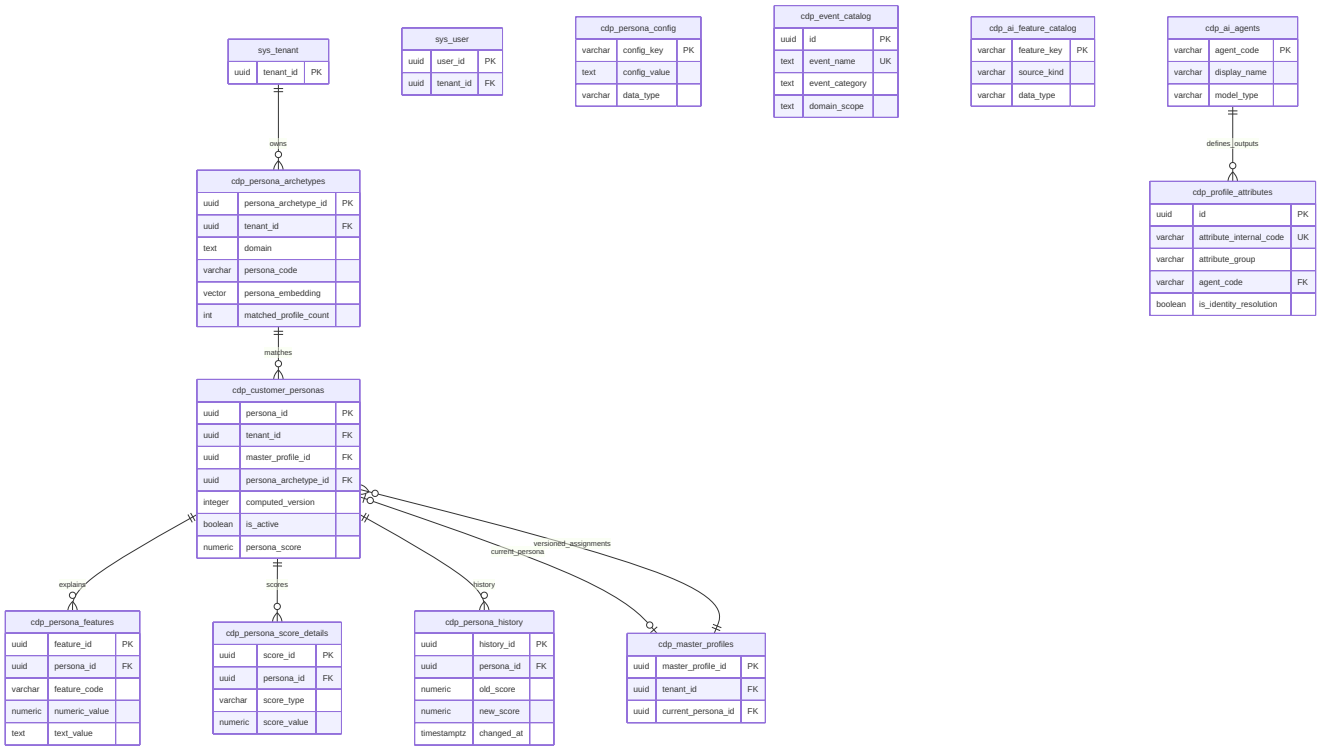


`cdp_event_catalog`, `cdp_ai_feature_catalog`, `cdp_ai_agents`, `cdp_profile_attributes`, and `cdp_persona_config` are global metadata/configuration catalogs; they do not all have a tenant key. Persona assignments are versioned rows linking a master profile to a reusable archetype.

5. Segmentation, content, and recommendations

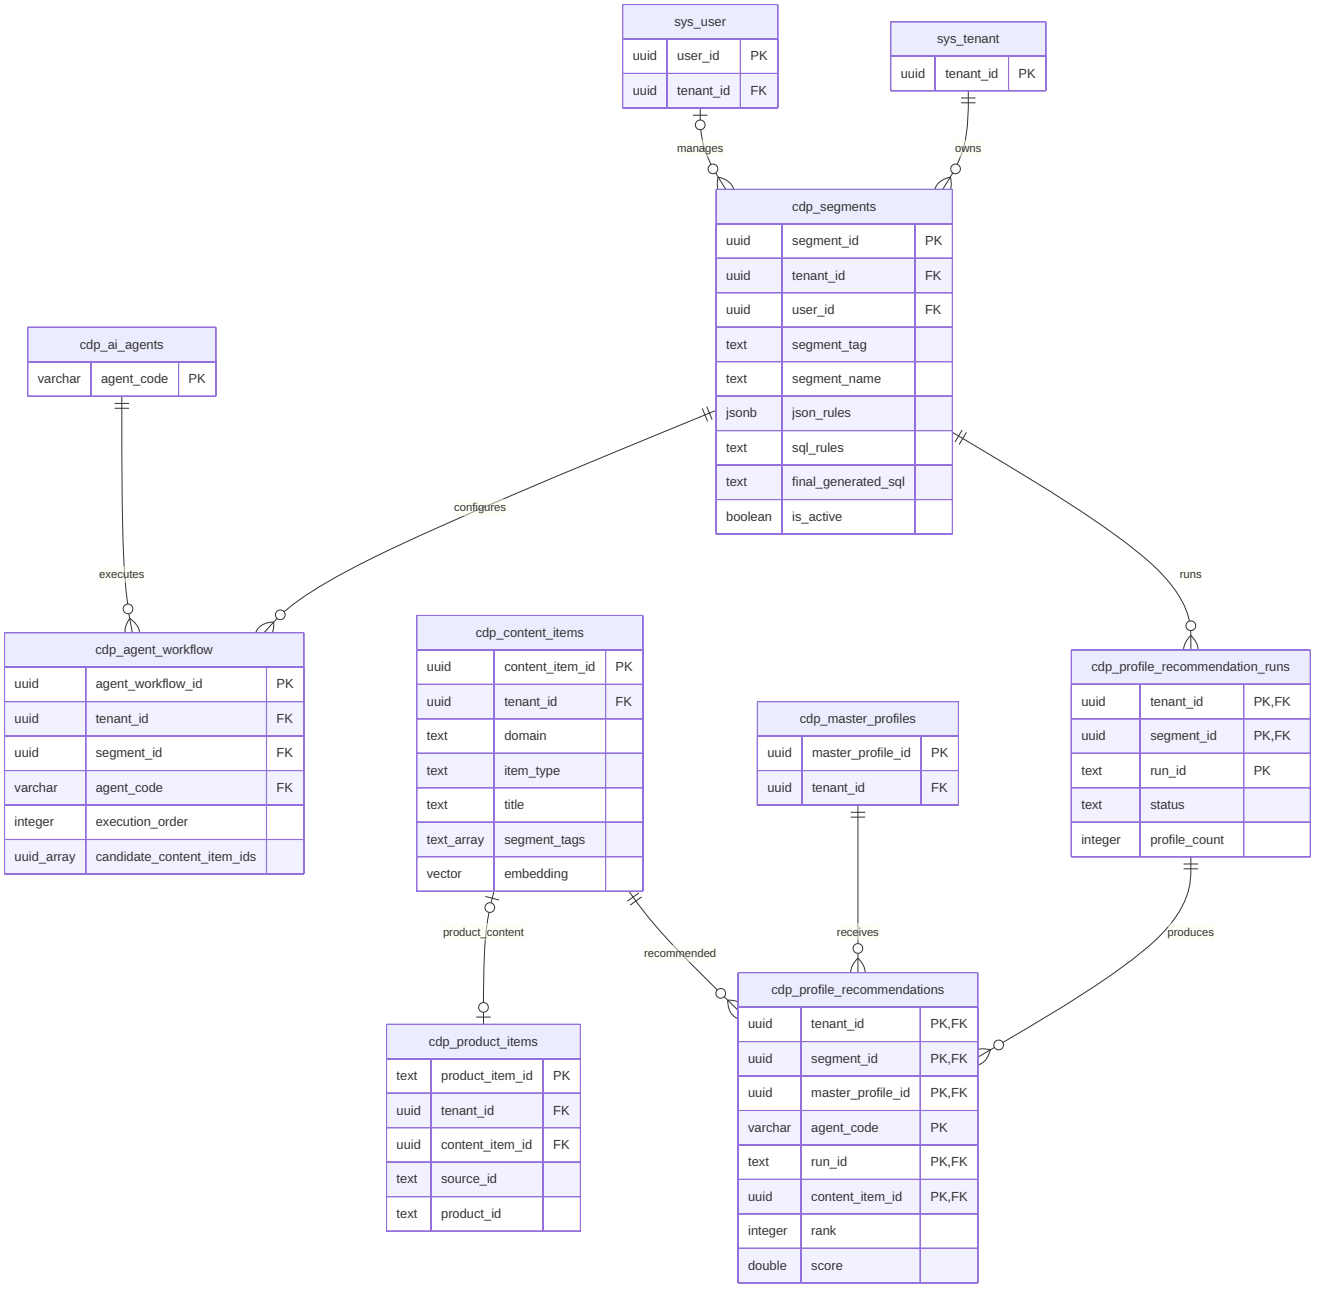


`cdp_product_items.content_item_id` is tenant-scoped and unique when present. `cdp_agent_workflow.candidate_content_item_ids` is an array validated by database triggers rather than a conventional foreign key. Recommendation records reference their run, tenant profile, and tenant content item with composite foreign keys.

6. Campaign planning, approval, activation, and reporting

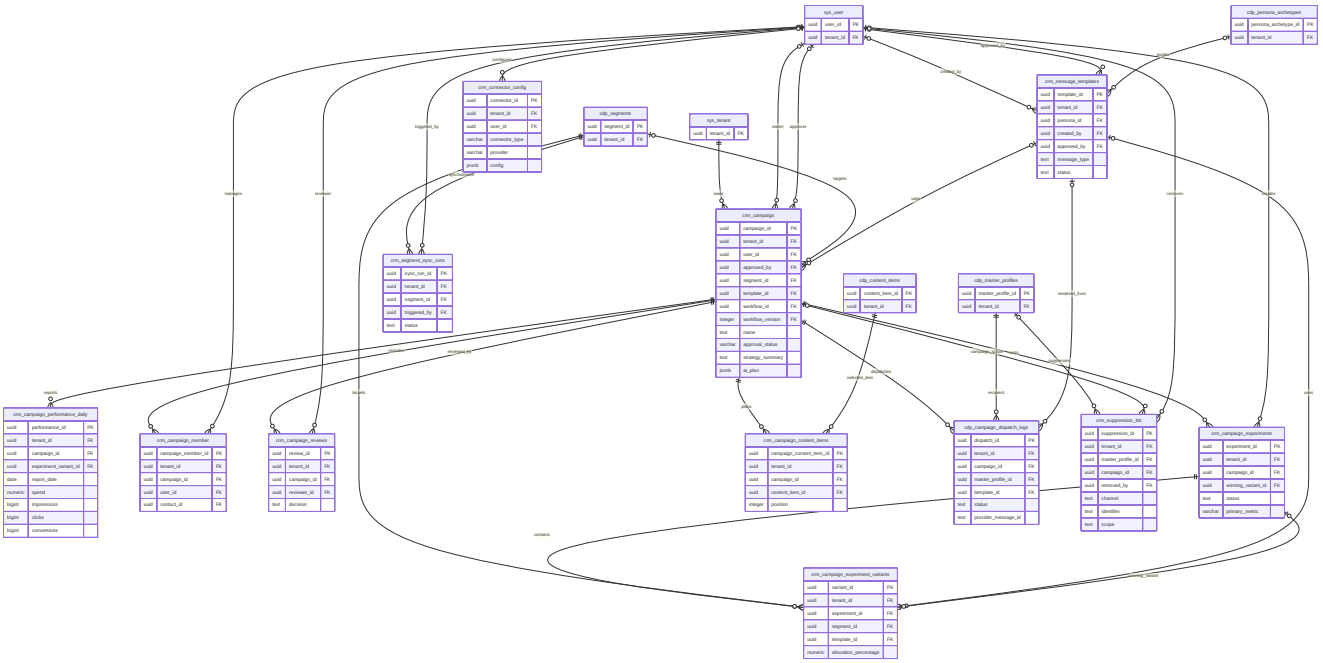


`crm_campaign.workflow_id`, `workflow_version`, and `tenant_id` reference the exact `(flow_id, version, tenant_id)` row in `crm_flow_version`; both workflow columns are nullable together. See the workflow diagram below. The daily performance view is derived and includes conversion, CPA, CTR, CVR, and ROAS aggregates.


7. General-purpose graph edges

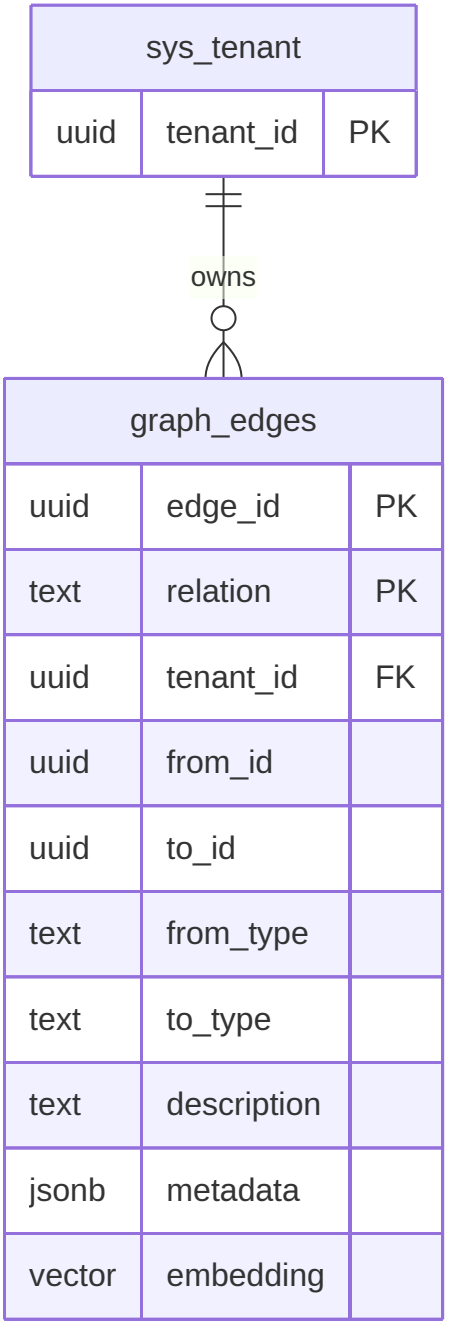

`graph_edges` is partitioned by `relation`; the primary key is `(edge_id, relation)`. Its `from_id` and `to_id` are polymorphic identifiers and deliberately are not foreign keys. SQL creates 15 partitions: `graph_edges_belongs_to`, `graph_edges_comes_from`, `graph_edges_converted`, `graph_edges_follows`, `graph_edges_is_part_of`, `graph_edges_is_active_as`, `graph_edges_is_connected_to`, `graph_edges_is_from`, `graph_edges_created_by`, `graph_edges_is_driven_by`, `graph_edges_has_role`, `graph_edges_has`, `graph_edges_is_for_the`, `graph_edges_belongs_to_industry`, and the default partition `graph_edges_other`.

8. Persisted customer journey workflows

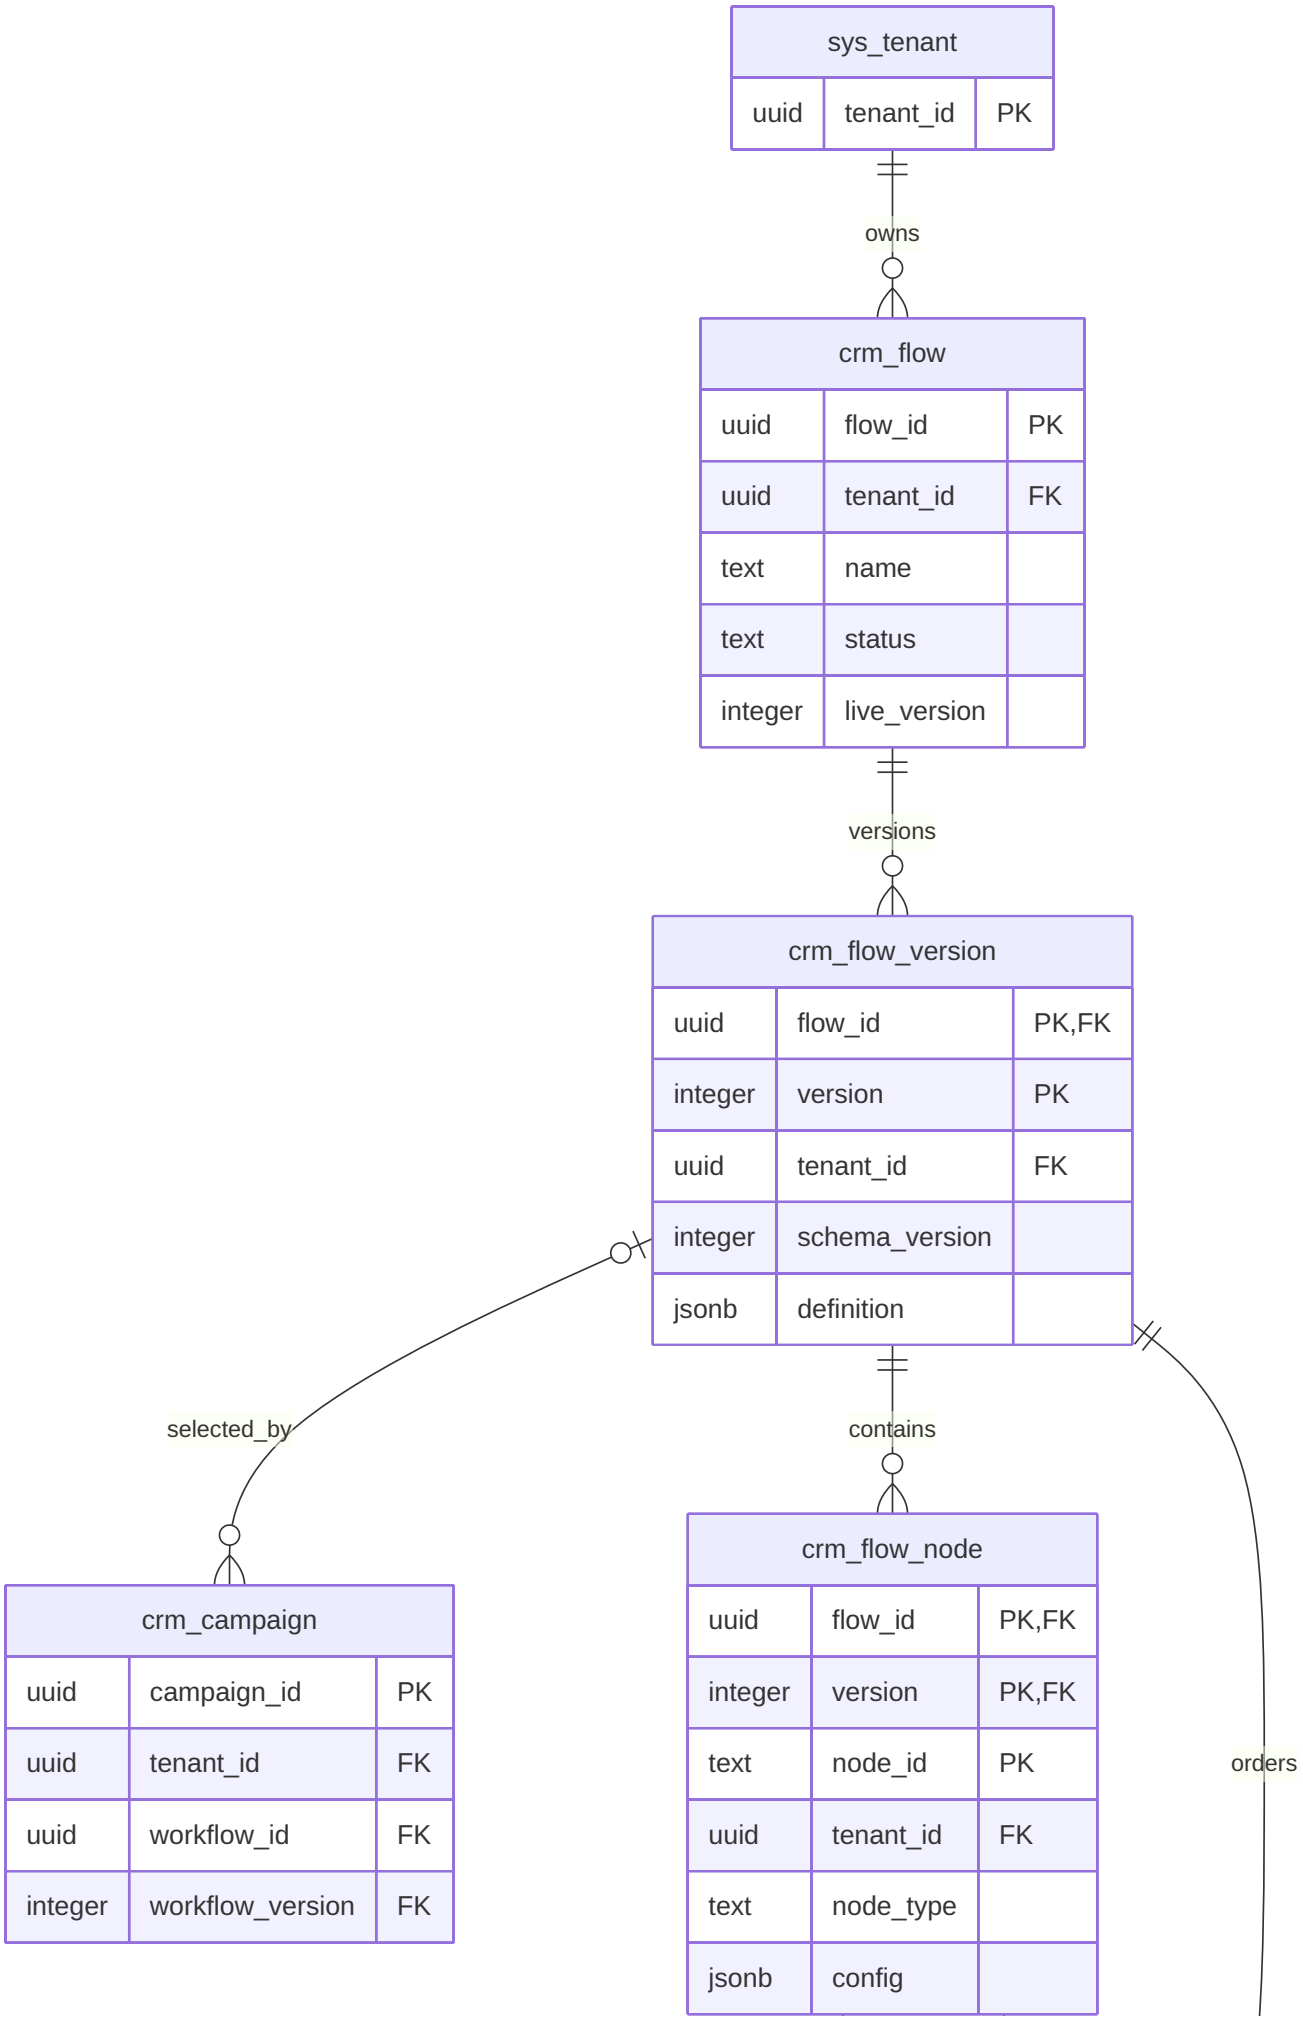
sys_tenant
uuid tenant_id PK
owns
crm_flow
uuid flow_id PK
uuid tenant_id FK
text name
text status
integer live_version
versions
crm_flow_version
uuid flow_id PK,FK
integer version PK
uuid tenant_id FK
integer schema_version
jsonb definition
selected_by
contains
orders
crm_campaign
uuid campaign_id PK
uuid tenant_id FK
uuid workflow_id FK
integer workflow_version FK
crm_flow_node
uuid flow_id PK,FK
integer version PK,FK
text node_id PK
uuid tenant_id FK
text node_type
jsonb config

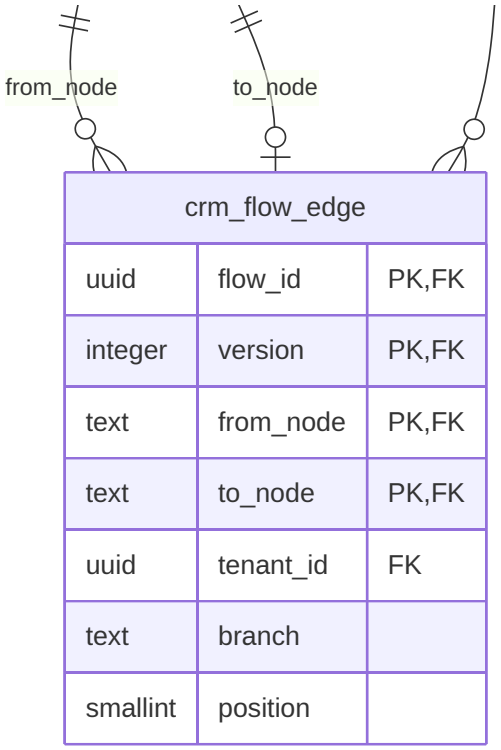

`crm_flow_version.definition` is the immutable workflow JSON snapshot. `crm_flow_node` and `crm_flow_edge` are its relational projection for queries. The edge table enforces one parent per node and one child per branch. `crm_flow.live_version` selects the published version; the campaign reference is separately pinned to a specific workflow version.

Other schema objects

Object	SQL definition
`vw_campaign_performance_metrics`	View joining `crm_campaign` to `crm_campaign_performance_daily` to calculate campaign-level totals and KPIs.
`crm_vw_flow_node`	View over `crm_flow_node` deriving message channel and wait duration.

`database-schema.sql` also defines functions for saving/publishing/loading flow JSON, persona and embedding maintenance triggers, tenant-consistent composite foreign keys, indexes, and row-level security policies. Those implementation objects are omitted from the ER diagrams. For exact column definitions, check constraints, uniqueness, delete behavior, indexes, and functions, consult `database-schema.sql`.