

elaborado por: lester iván fajardo gonzález

```
lifg@debian: ~/Escritorio
lifg@debian:~$ cd Escritorio
lifg@debian:~/Escritorio$ ls
Mi_Trabajo MY_APP primer_programa.rb proyecto_RoR Trabajo
lifg@debian:~/Escritorio$ su
Contraseña:
root@debian:/home/lifg/Escritorio# rails new app_scaffold
  create
  create  README.md
  create  Rakefile
  create  .ruby-version
  create  config.ru
  create  .gitignore
  create  .gitattributes
  create  Gemfile
  run     git init -b main from "."
Inicializado repositorio Git vacío en /home/lifg/Escritorio/app_scaffold/.git/
  create  app
  create  app/assets/config/manifest.js
  create  app/assets/stylesheets/application.css
  create  app/channels/application_cable/channel.rb
  create  app/channels/application_cable/connection.rb
  create  app/controllers/application_controller.rb
  create  app/helpers/application_helper.rb
  create  app/jobs/application_job.rb
```

```
lifg@debian: ~/Escritorio

from /root/.rbenv/versions/3.1.2/lib/ruby/gems/3.1.0/gems/bundler-2.3.7/
libexec/bundle:36:in `<main>'
Run turbo:install:redis to switch on Redis and use it in development for turbo s
treams
  apply /root/.rbenv/versions/3.1.2/lib/ruby/gems/3.1.0/gems/stimulus-rail
s-1.3.3/lib/install/stimulus_with_importmap.rb
  Create controllers directory
    create app/javascript/controllers
    create app/javascript/controllers/index.js
    create app/javascript/controllers/application.js
    create app/javascript/controllers/hello_controller.js
  Import Stimulus controllers
    append app/javascript/application.js
  Pin Stimulus
  Appending: pin "@hotwired/stimulus", to: "stimulus.min.js"
    append config/importmap.rb
  Appending: pin "@hotwired/stimulus-loading", to: "stimulus-loading.js"
    append config/importmap.rb
  Pin all controllers
  Appending: pin_all_from "app/javascript/controllers", under: "controllers"
    append config/importmap.rb
  run bundle install

Don't run Bundler as root. Bundler can ask for sudo if it is needed, and
installing your bundle as root will break this application for all non-root
```

```
lifg@debian: ~/Escritorio

  create app/views/buys/_form.html.erb
  create app/views/buys/_buy.html.erb
  invoke resource_route
  invoke test_unit
  create test/controllers/buys_controller_test.rb
  create test/system/buys_test.rb
  invoke helper
  create app/helpers/buys_helper.rb
  invoke test_unit
  invoke jbuilder
  create app/views/buys/index.json.jbuilder
  create app/views/buys/show.json.jbuilder
  create app/views/buys/_buy.json.jbuilder
root@debian:/home/lifg/Escritorio/app_scaffold# ls
app      config.ru  Gemfile    log        README.md  tmp
bin      db         Gemfile.lock  public    storage    vendor
config  Dockerfile lib        Rakefile  test
root@debian:/home/lifg/Escritorio/app_scaffold# rake db:migrate
== 20240904223002 CreateBuys: migrating =====
-- create_table(:buys)
   -> 0.0041s
== 20240904223002 CreateBuys: migrated (0.0044s) =====
root@debian:/home/lifg/Escritorio/app_scaffold#
```

```
lifg@debian: ~/Escritorio

invoke    helper
create    app/helpers/buys_helper.rb
invoke    test_unit
invoke    jbuilder
create    app/views/buys/index.json.jbuilder
create    app/views/buys/show.json.jbuilder
create    app/views/buys/_buy.json.jbuilder
root@debian:/home/lifg/Escritorio/app_scaffold# ls
app      config.ru  Gemfile    log        README.md  tmp
bin      db         Gemfile.lock  public     storage    vendor
config  Dockerfile lib        Rakefile   test
root@debian:/home/lifg/Escritorio/app_scaffold# rake db:migrate
== 20240904223002 CreateBuys: migrating =====
-- create_table(:buys)
   -> 0.0041s
== 20240904223002 CreateBuys: migrated (0.0044s) =====

root@debian:/home/lifg/Escritorio/app_scaffold# rake routes
rake aborted!
Don't know how to build task 'routes' (See the list of available tasks with `rake --tasks`)

(See full trace by running task with --trace)
root@debian:/home/lifg/Escritorio/app_scaffold#
```

AppScaffold

Documento sin título

Rails Routing from th

← → ↺

127.0.0.1:3000/buys/new

New buy



Category

Description

Amount

Create Buy

[Back to buys](#)

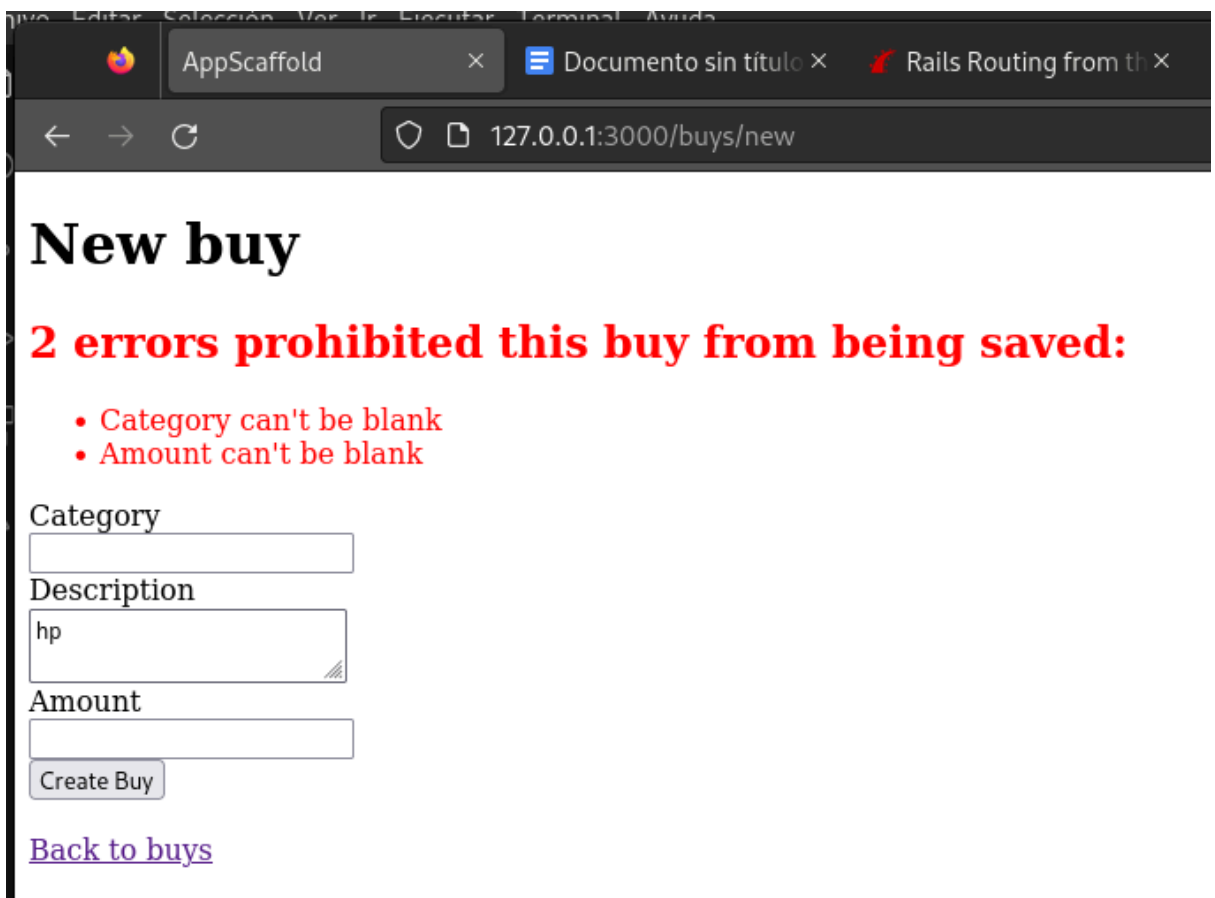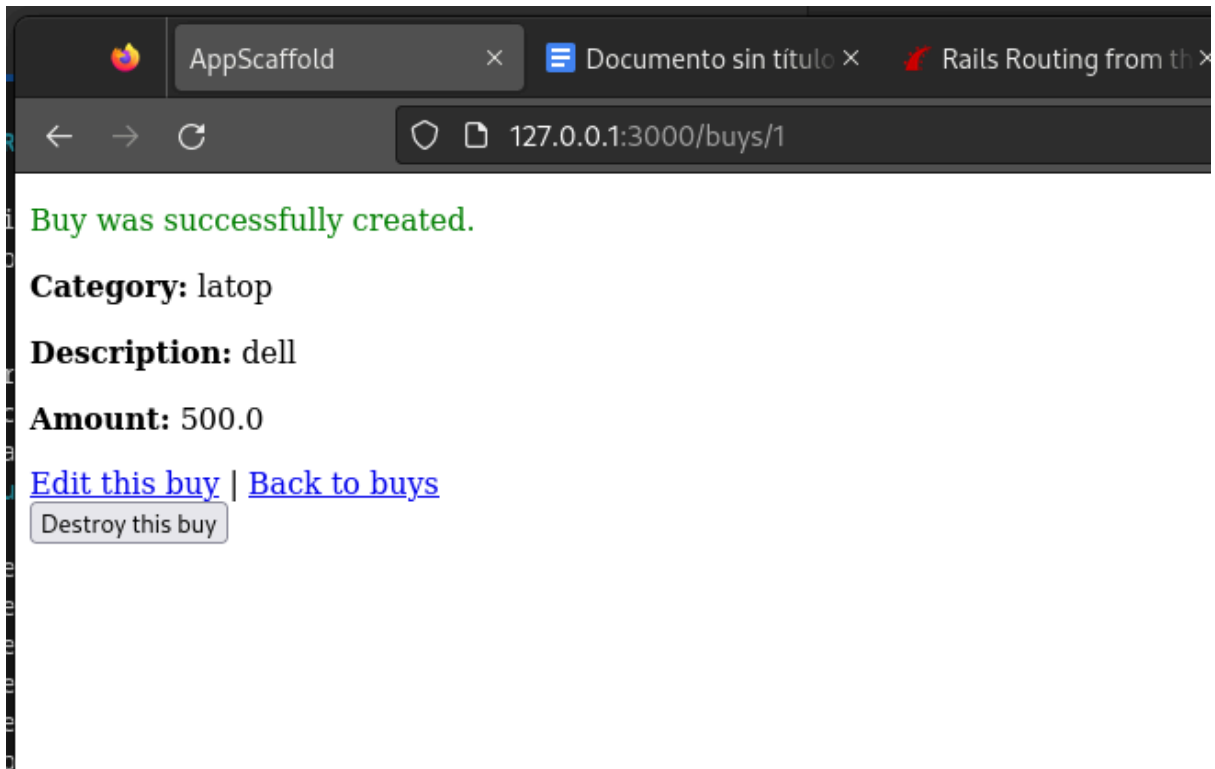

```
root@debian:/home/lifg/Escritorio/app_scaffold# cd Escritorio
```

```
bash: cd: Escritorio: No existe el fichero o el directorio
```

```
root@debian:/home/lifg/Escritorio/app_scaffold# cd ..
```

```
root@debian:/home/lifg/Escritorio# rails new AppEstudiante
```

```
create
```

```
create README.md
```

```
create Rakefile
```

```
create .ruby-version
```

```
create config.ru
```

```
create .gitignore
```

```
create .gitattributes
```

```
create Gemfile
```

```
run git init -b main from "."
```

```
Inicializado repositorio Git vacío en /home/lifg/Escritorio/AppEstudiante/.g
```

```
create app
```

```
create app/assets/config/manifest.js
```

```
create app/assets/stylesheets/application.css
```


```
create app/channels/application_cable/channel.rb
```

```
create app/channels/application_cable/connection.rb
```

```
create app/controllers/application_controller.rb
```

```
create app/helpers/application_helper.rb
```

```
create app/jobs/application_job.rb
```

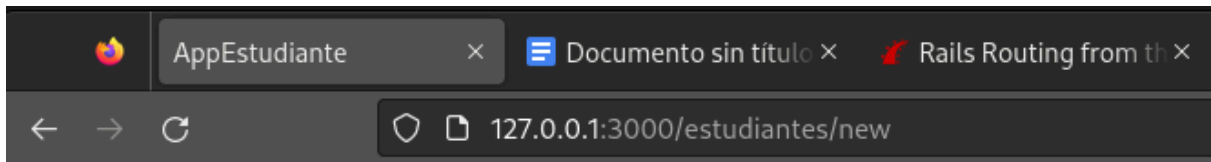

New estudiante


Nombre

Apellidos

Carrera

Carnet

Fecha de nacimiento


Edad

Celular

Create Estudiante

[Back to estudiantes](#)

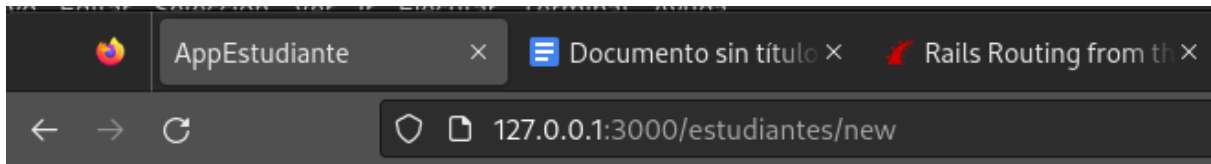

New estudiante

7 errors prohibited this estudiante from being saved

- Nombre can't be blank
- Apellidos can't be blank
- Carrera can't be blank
- Carnet can't be blank
- Fecha de nacimiento can't be blank
- Celular is not a number
- Celular is too short (minimum is 8 characters)


Nombre

Apellidos

Carrera

Carnet

Fecha de nacimiento

Edad

Celular

Create Estudiante

[Back to estudiantes](#)