

Task

I'd like to build a langchain pipeline that given a relevant user query

1. Invokes an arxiv_search tool that searches arxiv for papers related to keywords relevant to the user query
2. Downloads the top pdf and puts it into an ephemeral in-memory vector database (e.g. FAISS) using an embedding of your choice
3. Provides snippets from said pdf as input to the LLM for final response generation.

Examples

1. "what's the mmlu value of reka core according to the paper on arxiv?"
 - Returns something like "The score is 83.2", or
 - "The MMLU score is not in the provided context" (if retrieval/arxiv search did not work -- which is perfectly fine for the sake of the exercise)
2. "tell me a joke"
 - No tool is invoked; just provide the plain llm response.

I kept some code around that starts a background task for ollama, and downloads Gemma2 9B as well as a generic sentence encoder for your convenience, but feel free to pick whatever you'd like.

Bonus: Install local phoenix tracing and share a trace.


Overall Goal

- I don't care if the particular example queries actually work, I really just want to see the ~20 lines of relevant python code to illustrate the approach.
- Colab's free T4 GPU instances should work just fine, but let me know if you run into problems there.
- Please don't spend more than 30 minutes on it :)

Setup

```
!pip install langchain langchainhub langchain-community langchain-experimental langchain-huggingface --quiet
!pip install arxiv pymupdf --quiet
!pip install sentence_transformers --quiet
!pip install faiss-gpu --quiet
!pip install arize-phoenix --quiet
!apt install curl
```

```
import subprocess
```

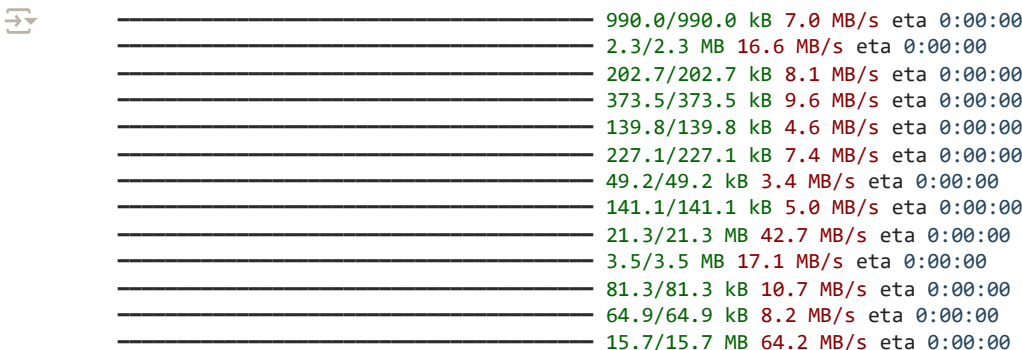

```
990.0/990.0 kB 7.0 MB/s eta 0:00:00
2.3/2.3 MB 16.6 MB/s eta 0:00:00
202.7/202.7 kB 8.1 MB/s eta 0:00:00
373.5/373.5 kB 9.6 MB/s eta 0:00:00
139.8/139.8 kB 4.6 MB/s eta 0:00:00
227.1/227.1 kB 7.4 MB/s eta 0:00:00
49.2/49.2 kB 3.4 MB/s eta 0:00:00
141.1/141.1 kB 5.0 MB/s eta 0:00:00
21.3/21.3 MB 42.7 MB/s eta 0:00:00
3.5/3.5 MB 17.1 MB/s eta 0:00:00
81.3/81.3 kB 10.7 MB/s eta 0:00:00
64.9/64.9 kB 8.2 MB/s eta 0:00:00
15.7/15.7 MB 64.2 MB/s eta 0:00:00
```

```
Preparing metadata (setup.py) ... done
```

```
Building wheel for sgmlib3k (setup.py) ... done
ERROR: pip's dependency resolver does not currently take into account all the packages that are installed. This beha
google-colab 1.0.0 requires requests==2.31.0, but you have requests 2.32.3 which is incompatible.
```

```
85.5/85.5 MB 8.6 MB/s eta 0:00:00
1.4/1.4 MB 9.6 MB/s eta 0:00:00
233.0/233.0 kB 10.9 MB/s eta 0:00:00
55.9/55.9 kB 7.8 MB/s eta 0:00:00
3.6/3.6 MB 23.7 MB/s eta 0:00:00
75.6/75.6 kB 9.9 MB/s eta 0:00:00
52.5/52.5 kB 6.7 MB/s eta 0:00:00
107.0/107.0 kB 14.6 MB/s eta 0:00:00
130.5/130.5 kB 16.3 MB/s eta 0:00:00
2.9/2.9 MB 38.5 MB/s eta 0:00:00
71.9/71.9 kB 9.7 MB/s eta 0:00:00
294.5/294.5 kB 30.6 MB/s eta 0:00:00
85.7/85.7 kB 11.1 MB/s eta 0:00:00
62.4/62.4 kB 7.6 MB/s eta 0:00:00
202.9/202.9 kB 24.8 MB/s eta 0:00:00
78.6/78.6 kB 10.9 MB/s eta 0:00:00
1.9/1.9 MB 43.5 MB/s eta 0:00:00
59.9/59.9 kB 7.8 MB/s eta 0:00:00
77.9/77.9 kB 9.7 MB/s eta 0:00:00
58.3/58.3 kB 7.7 MB/s eta 0:00:00
56.9/56.9 kB 7.0 MB/s eta 0:00:00
```

```
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
curl is already the newest version (7.81.0-1ubuntu1.16).
0 upgraded, 0 newly installed, 0 to remove and 45 not upgraded.
```

```
!curl -fsSL https://ollama.com/install.sh | sh
```

```
>>> Downloading ollama...
##### 100.0%
>>> Installing ollama to /usr/local/bin...
>>> Creating ollama user...
>>> Adding ollama user to video group...
>>> Adding current user to ollama group...
>>> Creating ollama systemd service...
WARNING: Unable to detect NVIDIA/AMD GPU. Install lspci or lshw to automatically detect and install GPU dependencies
>>> The Ollama API is now available at 127.0.0.1:11434.
>>> Install complete. Run "ollama" from the command line.
```

```
subprocess.Popen(["ollama", "serve"], start_new_session=True)
```

```
<Popen: returncode: None args: ['ollama', 'serve']>
```

```
import phoenix as px
session = px.launch_app()
```

```
To view the Phoenix app in your browser, visit https://t2s0qlj7cq11-496
For more information on how to use Phoenix, check out https://docs.ariz
```

```
!ollama pull gemma2:9b
```

```
>
```

```

verifying sha256 digest : pulling manifest
pulling ff1d1fc78170... 100% | 5.4 GB
pulling 109037bec39c... 100% | 136 B
pulling 097a36493f71... 100% | 8.4 KB
pulling 2490e7468436... 100% | 65 B
pulling 10aa81da732e... 100% | 487 B
verifying sha256 digest : pulling manifest
pulling ff1d1fc78170... 100% | 5.4 GB
pulling 109037bec39c... 100% | 136 B
pulling 097a36493f71... 100% | 8.4 KB
pulling 2490e7468436... 100% | 65 B
pulling 10aa81da732e... 100% | 487 B
verifying sha256 digest : pulling manifest
pulling ff1d1fc78170... 100% | 5.4 GB
pulling 109037bec39c... 100% | 136 B
pulling 097a36493f71... 100% | 8.4 KB
pulling 2490e7468436... 100% | 65 B
pulling 10aa81da732e... 100% | 487 B
verifying sha256 digest : pulling manifest
pulling ff1d1fc78170... 100% | 5.4 GB
pulling 109037bec39c... 100% | 136 B
pulling 097a36493f71... 100% | 8.4 KB
pulling 2490e7468436... 100% | 65 B
pulling 10aa81da732e... 100% | 487 B
verifying sha256 digest : pulling manifest
pulling ff1d1fc78170... 100% | 5.4 GB
pulling 109037bec39c... 100% | 136 B
pulling 097a36493f71... 100% | 8.4 KB
pulling 2490e7468436... 100% | 65 B
pulling 10aa81da732e... 100% | 487 B
verifying sha256 digest : pulling manifest
pulling ff1d1fc78170... 100% | 5.4 GB
pulling 109037bec39c... 100% | 136 B
pulling 097a36493f71... 100% | 8.4 KB
pulling 2490e7468436... 100% | 65 B
pulling 10aa81da732e... 100% | 487 B
verifying sha256 digest : pulling manifest
pulling ff1d1fc78170... 100% | 5.4 GB
pulling 109037bec39c... 100% | 136 B
pulling 097a36493f71... 100% | 8.4 KB
pulling 2490e7468436... 100% | 65 B
pulling 10aa81da732e... 100% | 487 B
verifying sha256 digest
writing manifest
removing any unused layers
success

```

Arxiv RAG chain

```

import subprocess
!curl -fsSL https://ollama.com/install.sh | sh
import phoenix as px
session = px.launch_app()
!ollama pull gemma2:9b

```

```

➡ >>> Downloading ollama...
#####
>>> Installing ollama to /usr/local/bin...
>>> Adding ollama user to video group...
>>> Adding current user to ollama group...
>>> Creating ollama systemd service...
WARNING: Unable to detect NVIDIA/AMD GPU. Install lspci or lshw to automat:
>>> The Ollama API is now available at 127.0.0.1:11434.
>>> Install complete. Run "ollama" from the command line.
WARNI [phoenix.session.session] Existing running Phoenix instance detected
🟢 To view the Phoenix app in your browser, visit https://t2s0qlj7cql3-496
📖 For more information on how to use Phoenix, check out https://docs.ariz
pulling manifest ": pulling manifest ": pulling manifest : pulling manifest
pulling ff1d1fc78170... 100% | 5.4 GB
pulling 109037bec39c... 100% | 136 B
pulling 097a36493f71... 100% | 8.4 KB
pulling 2490e7468436... 100% | 65 B
pulling 10aa81da732e... 100% | 487 B
verifying sha256 digest
writing manifest
removing any unused layers
success

```

```

import arxiv
import langchain
import faiss
from langchain_experimental.llms.ollama_functions import OllamaFunctions
from langchain.embeddings.huggingface import HuggingFaceEmbeddings
from langchain.vectorstores.faiss import FAISS
from langchain.chains import LLMChain
from langchain.prompts import PromptTemplate
from sentence_transformers import SentenceTransformer
import fitz
import requests
import numpy as np

llm = OllamaFunctions(model="gemma2:9b", format="json", temperature=0)
embeddings_model_name = "sentence-transformers/all-mpnet-base-v2"
embedder = HuggingFaceEmbeddings(model_name=embeddings_model_name, model_kwargs={"device": "cuda"})

```

```

➡ /usr/local/lib/python3.10/dist-packages/langchain_core/_api/deprecation.py
warn_deprecated(
/usr/local/lib/python3.10/dist-packages/huggingface_hub/utils/_token.py:89
The secret `HF_TOKEN` does not exist in your Colab secrets.
To authenticate with the Hugging Face Hub, create a token in your settings
You will be able to reuse this secret in all of your notebooks.
Please note that authentication is recommended but still optional to access:
warnings.warn(
modules.json: 100% 349/349 [00:00<00:00, 25.9kB/s]
config_sentence_transformers.json: 100% 116/116 [00:00<00:00, 7.94kB/s]
README.md: 100% 10.6k/10.6k [00:00<00:00, 902kB/s]
sentence_bert_config.json: 100% 53.0/53.0 [00:00<00:00, 2.14kB/s]
config.json: 100% 571/571 [00:00<00:00, 31.1kB/s]
model.safetensors: 100% 438M/438M [00:02<00:00, 195MB/s]
tokenizer_config.json: 100% 363/363 [00:00<00:00, 21.7kB/s]
vocab.txt: 100% 232k/232k [00:00<00:00, 1.76MB/s]
tokenizer.json: 100% 466k/466k [00:00<00:00, 3.66MB/s]
special_tokens_map.json: 100% 239/239 [00:00<00:00, 13.7kB/s]
1_Pooling/config.json: 100% 190/190 [00:00<00:00, 9.24kB/s]

```

```

# Define the function to search arXiv and get the top paper
def search_arxiv(query):
    search = arxiv.Search(query=query, max_results=1, sort_by=arxiv.SortCriterion.Relevance)
    paper = next(search.results())
    return paper.pdf_url

# Define the function to download and read the PDF
def download_pdf(pdf_url):
    response = requests.get(pdf_url)
    with open("temp.pdf", "wb") as f:
        f.write(response.content)
    doc = fitz.open("temp.pdf")
    text = ""
    for page in doc:
        text += page.get_text()
    return text

# Define the function to embed and store in FAISS
def embed_text_to_faiss(text, embedder):
    sentences = text.split(". ")
    embeddings = embedder.embed_documents(sentences)
    embeddings = np.array(embeddings).astype('float32')
    faiss_index = faiss.IndexFlatL2(embeddings.shape[1])
    faiss_index.add(embeddings)
    return faiss_index, sentences

# Define the function to query the FAISS index
def query_faiss(query, faiss_index, sentences, embedder):
    query_embedding = embedder.embed_query(query)
    query_embedding = np.array(query_embedding).astype('float32').reshape(1, -1)
    D, I = faiss_index.search(query_embedding, k=1)
    return sentences[I[0][0]]

# Main function to handle the pipeline
def main_pipeline(query):
    if "arxiv" in query:
        pdf_url = search_arxiv(query)

```

```

pdf_text = download_pdf(pdf_url)
faiss_index, sentences = embed_text_to_faiss(pdf_text, embedder)
response = query_faiss(query, faiss_index, sentences, embedder)
else:
    response = llm(query)
return response

```

Example

```

query = "what's the mmlu value of reka core according to the paper on arxiv?"
response = main_pipeline(query)
print(response)

```

```

<ipython-input-28-c7f588102789>:4: DeprecationWarning: The 'Search.results' method is deprecated, use 'Client.result
    paper = next(search.results())
Hence, numbers
have been upgraded since their first appearances.
13
3.6.1
Reka Edge results
We report results of Reka Edge against other 7B models such as Llama 2 (Touvron et al., 2023), Mistral (Jiang
et al., 2023) and Gemma (Gemma et al., 2024).
Table 14: Results comparing Reka Edge with other leading 7B models in the industry

```

OK I'll stop here.

Start coding or [generate](#) with AI.

Start coding or [generate](#) with AI.

Start coding or [generate](#) with AI.

Start coding or [generate](#) with AI.

Start coding or [generate](#) with AI.

Start coding or [generate](#) with AI.

Start coding or [generate](#) with AI.