


```
PS D:\RA_IT209\Session04\bai2_IT209_SS05> git rebase -i HEAD~4
fatal: invalid upstream 'HEAD~4'
```

```
PS D:\RA_IT209\Session04\bai2_IT209_SS05> git log --oneline
6216952 (HEAD -> master) add temp file for debug
e0eafab adds utility functions
cbec2f7 fix typo
5951061 feat: khoi tao module auth
```

```
PS D:\RA_IT209\Session04\bai2_IT209_SS05> 
```

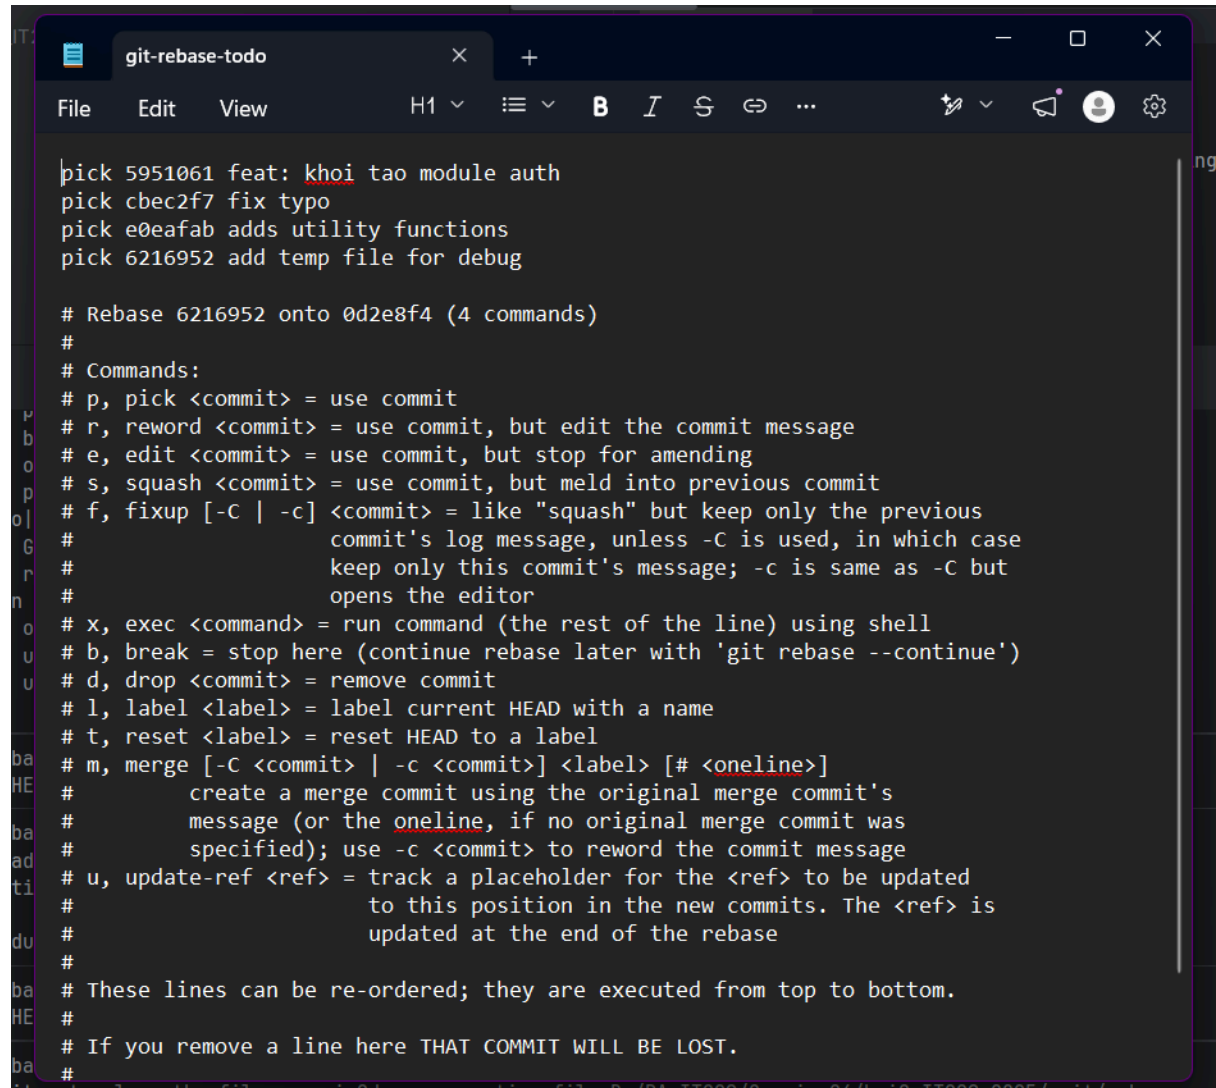

```
git-rebase-todo
File Edit View H1  B I S  ...
pick 5951061 feat: khoi tao module auth
pick cbec2f7 fix typo
pick e0eafab adds utility functions
pick 6216952 add temp file for debug

# Rebase 6216952 onto 0d2e8f4 (4 commands)
#
# Commands:
# p, pick <commit> = use commit
# r, reword <commit> = use commit, but edit the commit message
# e, edit <commit> = use commit, but stop for amending
# s, squash <commit> = use commit, but meld into previous commit
# f, fixup [-C | -c] <commit> = like "squash" but keep only the previous
#                               commit's log message, unless -C is used, in which case
#                               keep only this commit's message; -c is same as -C but
#                               opens the editor
# x, exec <command> = run command (the rest of the line) using shell
# b, break = stop here (continue rebase later with 'git rebase --continue')
# d, drop <commit> = remove commit
# l, label <label> = label current HEAD with a name
# t, reset <label> = reset HEAD to a label
# m, merge [-C <commit> | -c <commit>] <label> [# <oneline>]
#       create a merge commit using the original merge commit's
#       message (or the oneline, if no original merge commit was
#       specified); use -c <commit> to reword the commit message
# u, update-ref <ref> = track a placeholder for the <ref> to be updated
#                       to this position in the new commits. The <ref> is
#                       updated at the end of the rebase
#
# These lines can be re-ordered; they are executed from top to bottom.
#
# If you remove a line here THAT COMMIT WILL BE LOST.
#
```

```
git-rebase-todo
File Edit View H1 ≡ B I S ↺ ...
pick 5951061 feat: khoi tao module auth
squash cbec2f7 fix typo
squash e0eafab adds utility functions
pick 6216952 add temp file for debug

# Rebase 6216952 onto 0d2e8f4 (4 commands)
#
# Commands:
# p, pick <commit> = use commit
# r, reword <commit> = use commit, but edit the commit message
# e, edit <commit> = use commit, but stop for amending
# s, squash <commit> = use commit, but meld into previous commit
# f, fixup [-C | -c] <commit> = like "squash" but keep only the previous
#      commit's log message, unless -C is used, in which case
#      keep only this commit's message; -c is same as -C but
#      opens the editor
# x, exec <command> = run command (the rest of the line) using shell
# b, break = stop here (continue rebase later with 'git rebase --continue')
# d, drop <commit> = remove commit
# l, label <label> = label current HEAD with a name
# t, reset <label> = reset HEAD to a label
# m, merge [-C <commit> | -c <commit>] <label> [# <oneline>]
#      create a merge commit using the original merge commit's
#      message (or the oneline, if no original merge commit was
#      specified); use -c <commit> to reword the commit message
# u, update-ref <ref> = track a placeholder for the <ref> to be updated
#      to this position in the new commits. The <ref> is
#      updated at the end of the rebase
#
# These lines can be re-ordered; they are executed from top to bottom.
#
# If you remove a line here THAT COMMIT WILL BE LOST.
```