

# 全速衝線安裝說明手冊



中華民國 109 年 6 月 6 日


## 目錄

目錄.....	i
1. 取得檔案 .....	1
步驟一 .....	1
步驟二.....	1
2. 安裝編譯器 Atom .....	2
3. 安裝 Node.js.....	2
步驟一 .....	2
步驟二 .....	6
步驟三 .....	6
4. 安裝 mongo DB .....	7
5. 安裝 Robo 3T.....	11
步驟一 .....	11
步驟二 .....	12
6. 執行專案 .....	15
步驟一 .....	15
步驟二 .....	15
步驟三 .....	16
步驟四 .....	16


7. 建立資料庫 .....	16
8. 建立管理員帳號 .....	17
步驟一 .....	17
步驟二 .....	17
步驟三 .....	18
步驟四 .....	18
步驟五 .....	19

## 1 取得檔案：

步驟一：請到光碟中將「結案用.zip」複製到電腦中（例：D:\）

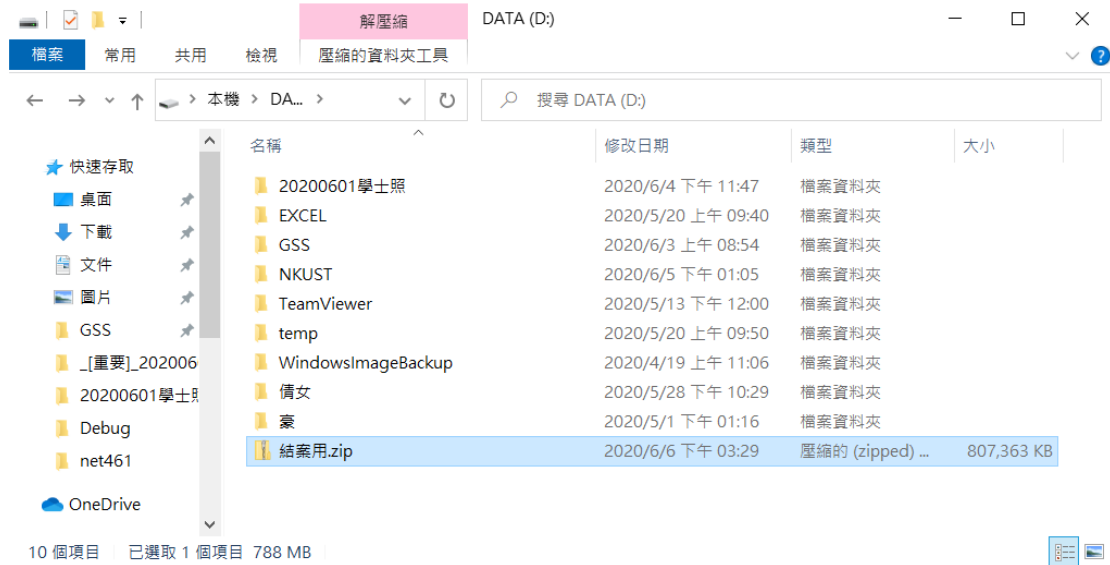


步驟二：將「結案用.zip」進行解壓縮，選擇「解壓縮全部(T)」

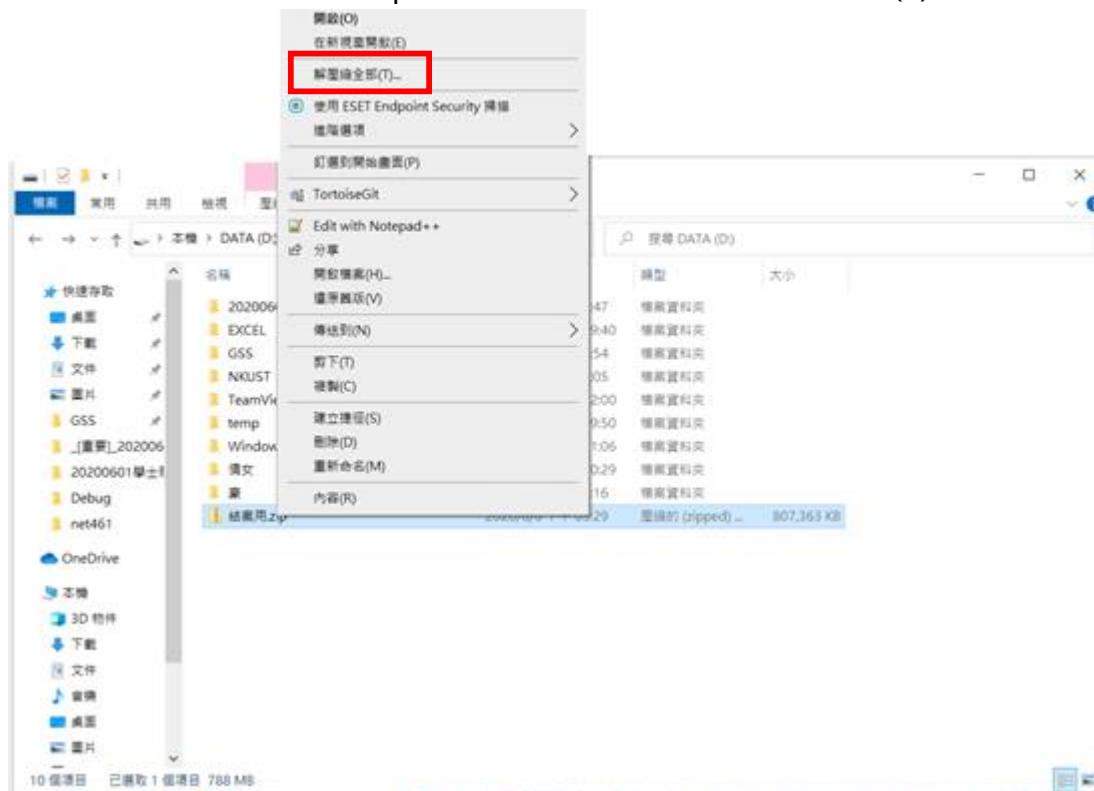


## 2 安裝編譯器 Atom(有其他編譯器可跳過此步驟，如：Visual Studio code)：

直接執行「AtomSetup-x64.exe」

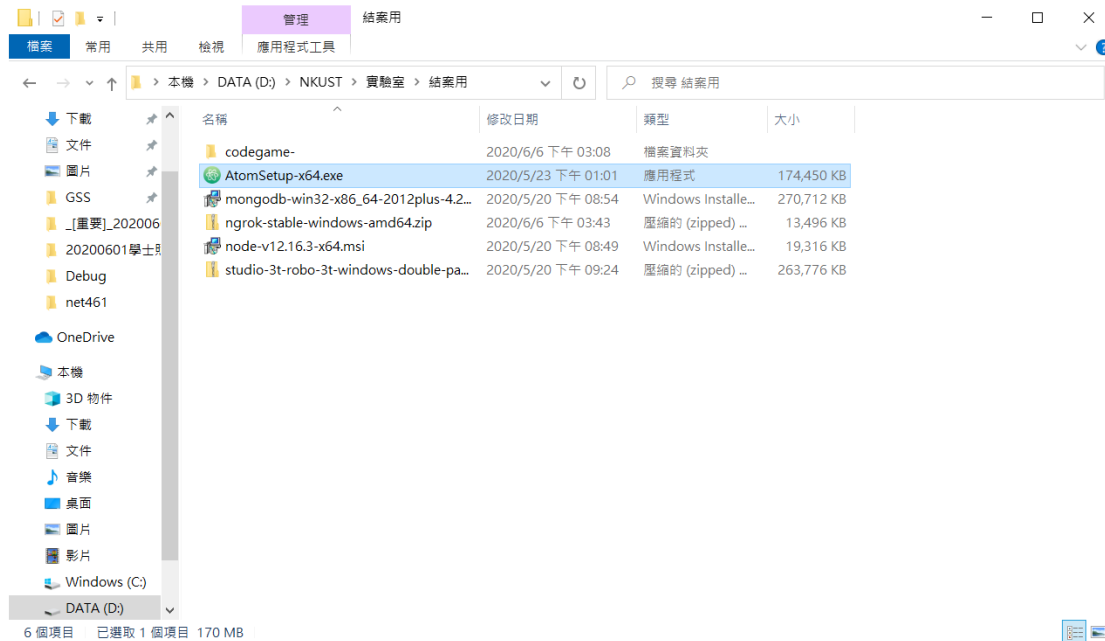



## 3 安裝 Node.js：

步驟一：直接執行「node-v12.16.3-x64.msi」

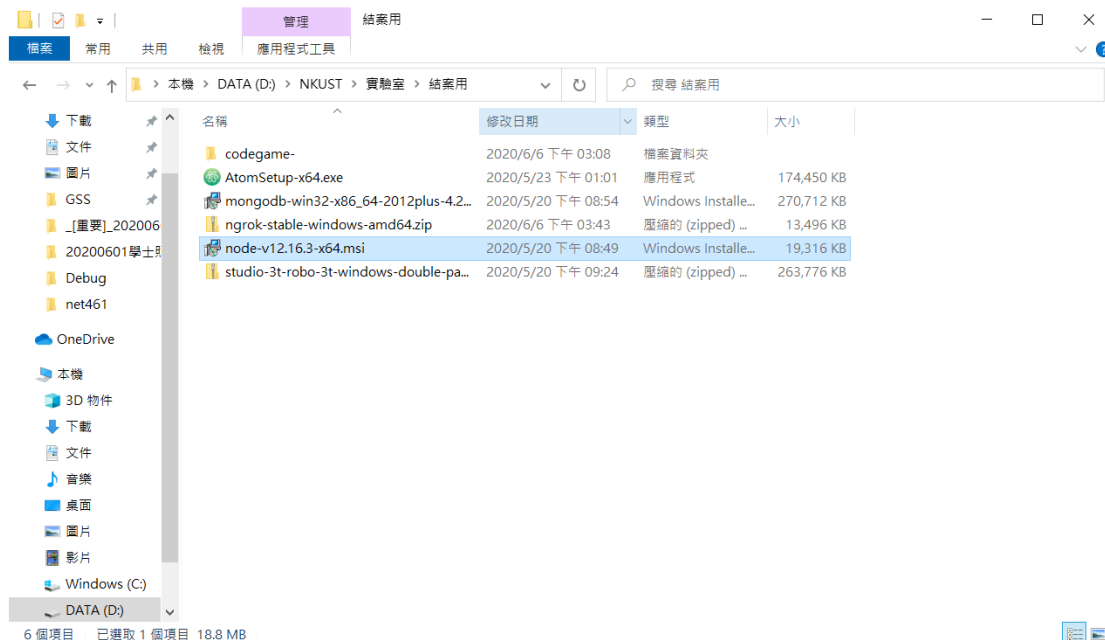




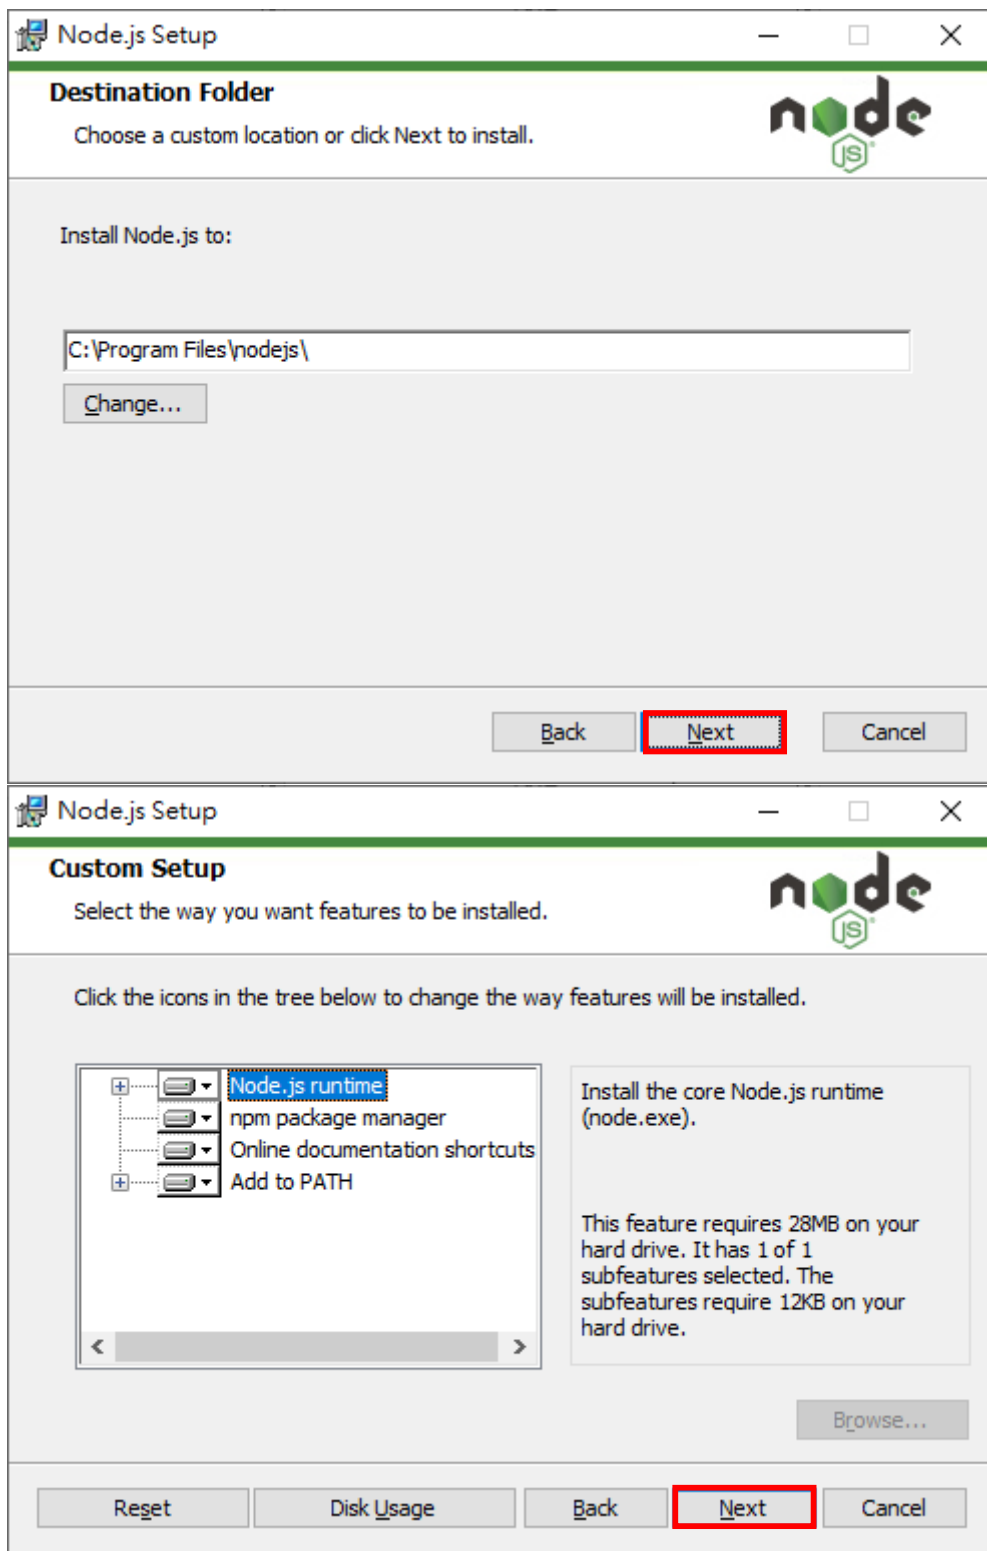


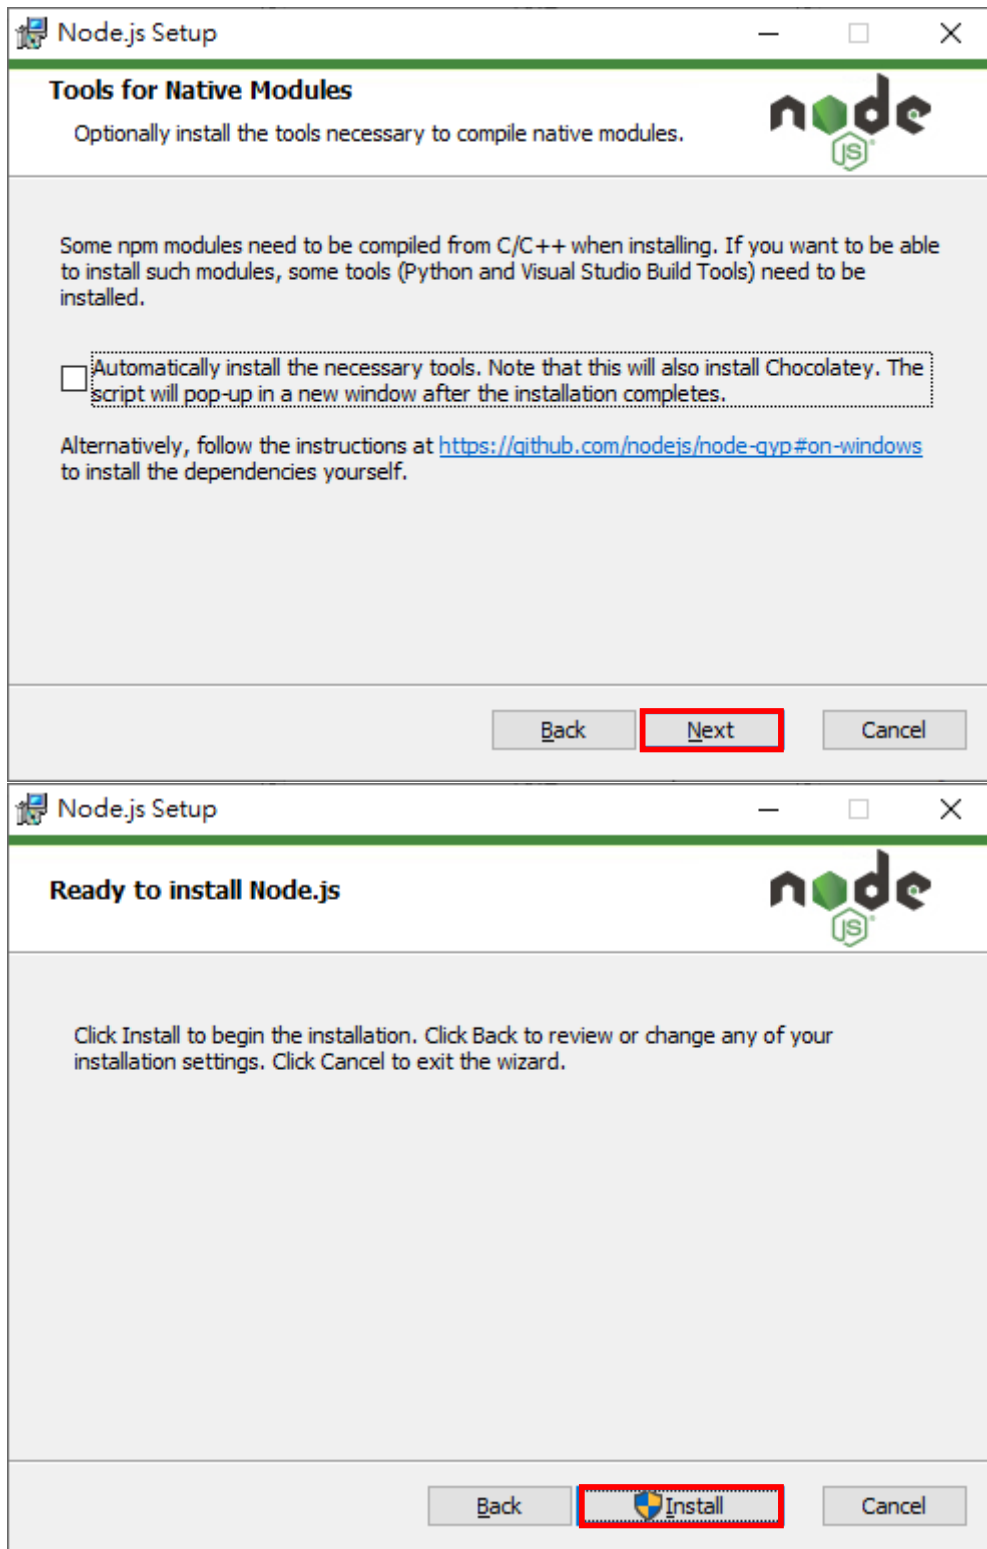



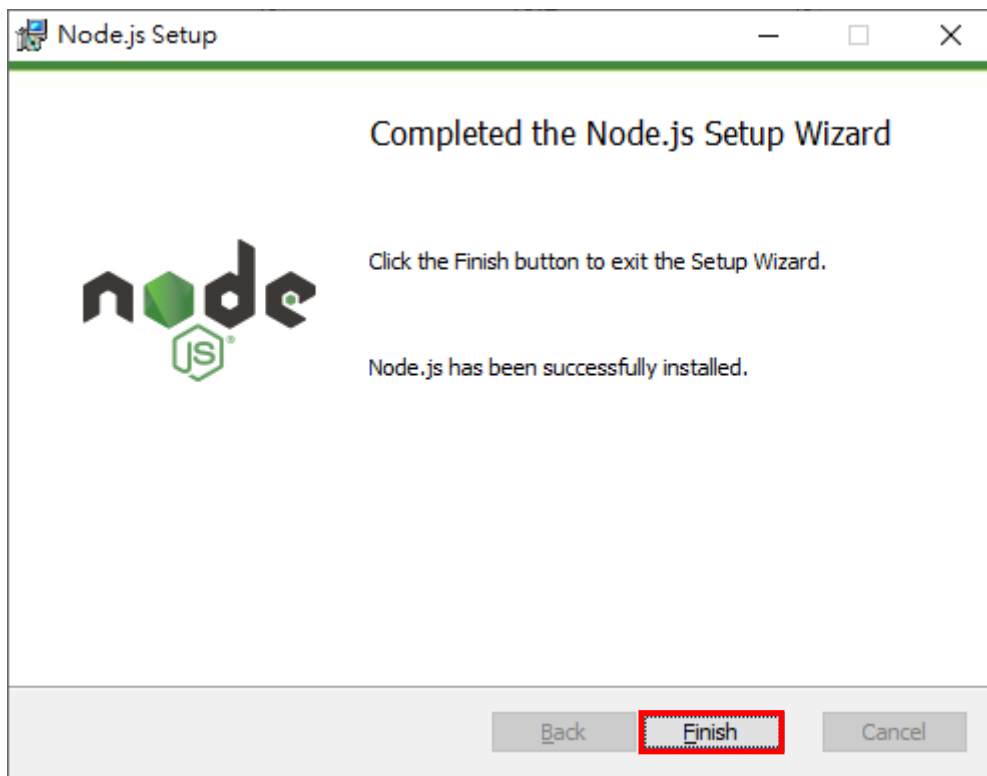

步驟二：在資料夾上輸入「cmd」

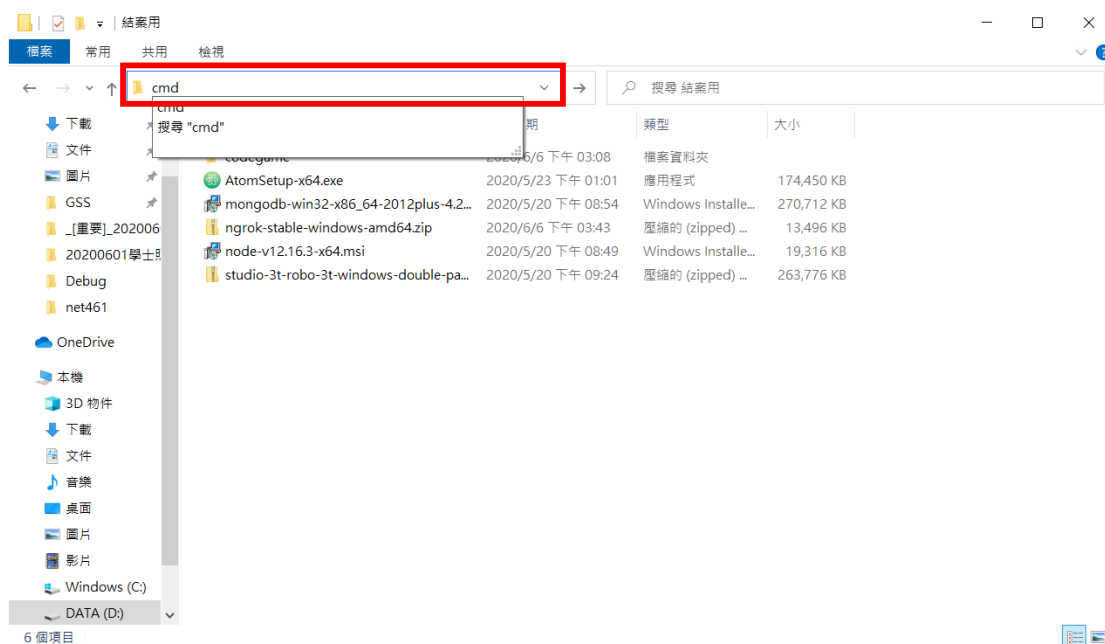



步驟三：輸入「node -v」確認已安裝成功



#### 4 安裝 mongo DB :

直接執行「mongodb-win32-x86\_64-2012plus-4.2.6-signed.msi」

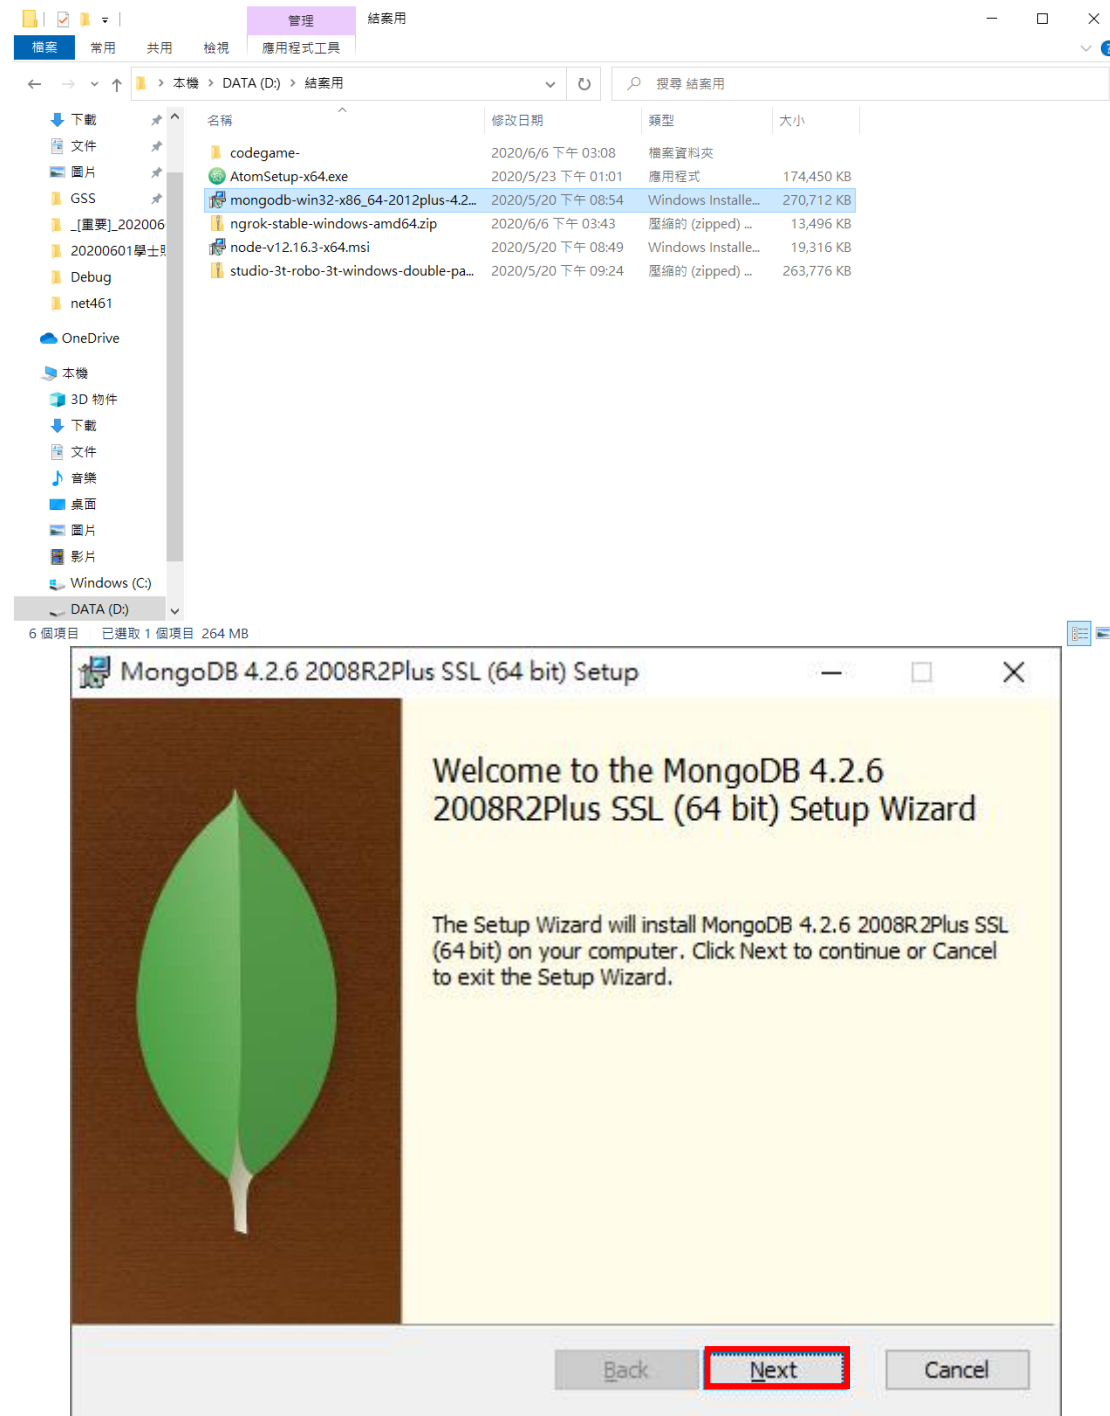

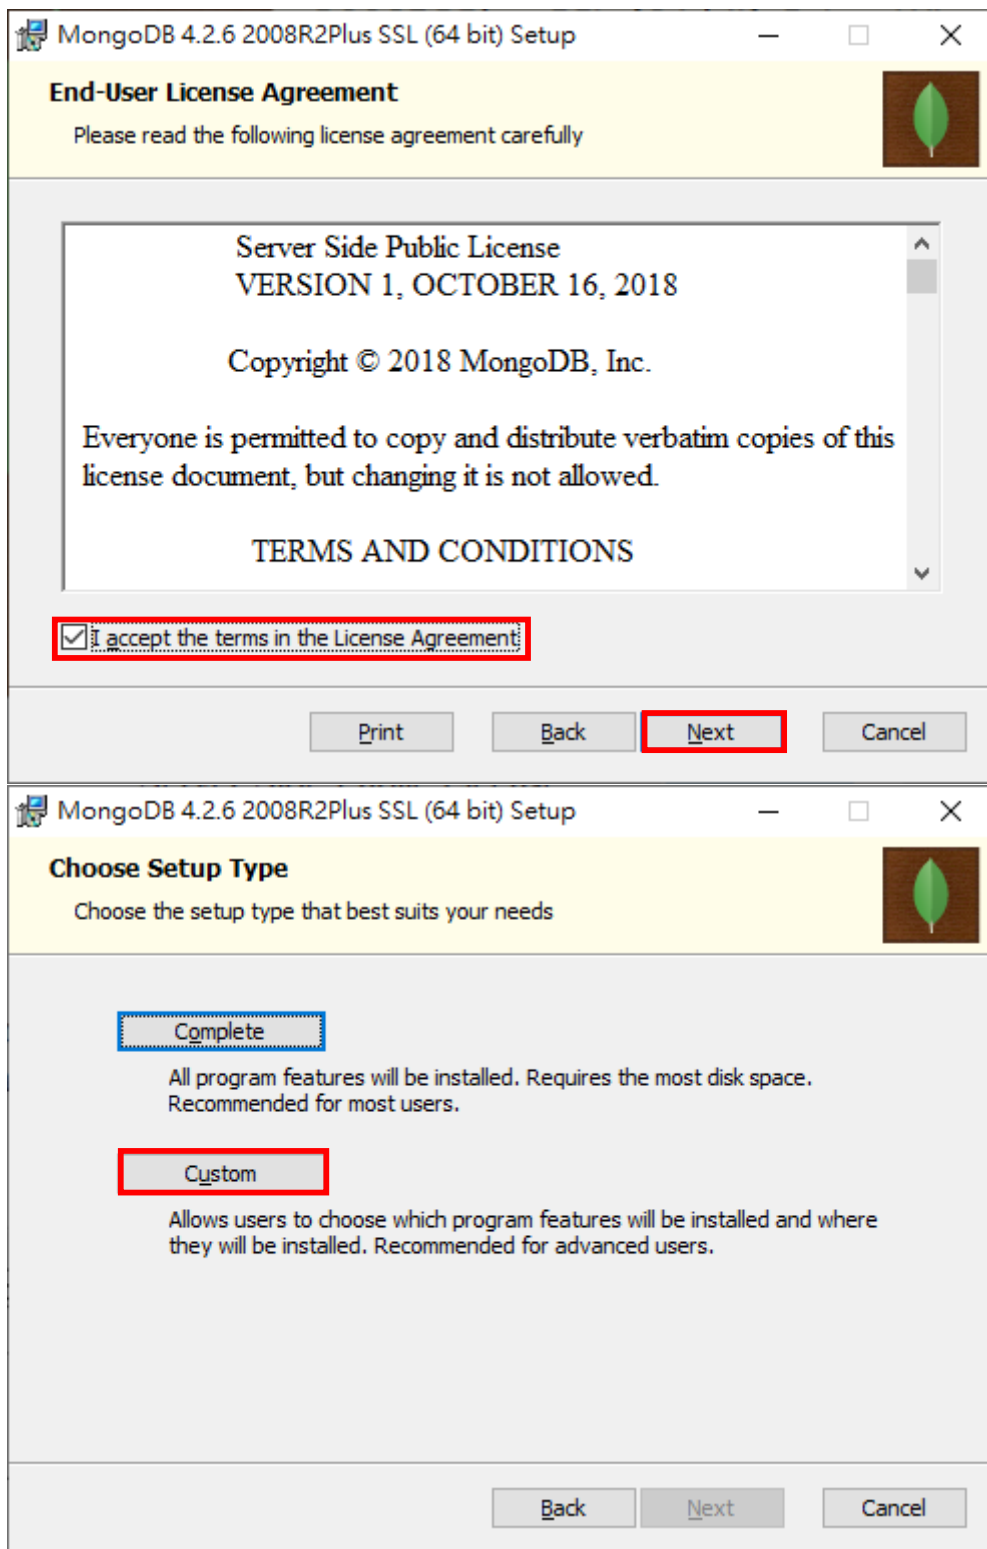

MongoDB 4.2.6 2008R2Plus SSL (64 bit) Setup

Custom Setup

Select the way you want features to be installed.

Click the icons in the tree below to change the way features will be installed.

MongoDB 4.2.6 2008R2Plus SSL

MongoDB 4.2.6 2008R2Plus SSL (64 bit)

This feature requires 313KB on your hard drive. It has 6 of 6 subfeatures selected. The subfeatures require 441MB on your hard drive.

Location: C:\Program Files\MongoDB\Server\4.2\ Browse...

Reset

Disk Usage

Back

Next

Cancel

MongoDB 4.2.6 2008R2Plus SSL (64 bit) Service Customiz...

Service Configuration

Specify optional settings to configure MongoDB as a service.

☒ Install MongoD as a Service

☒ Run service as Network Service user

☐ Run service as a local or domain user:

Account Domain: .

Account Name: MongoDB

Account Password:

Service Name: MongoDB

Data Directory: C:\Program Files\MongoDB\Server\4.2\data\


Log Directory: C:\Program Files\MongoDB\Server\4.2\log\


< Back

Next >

Cancel


9

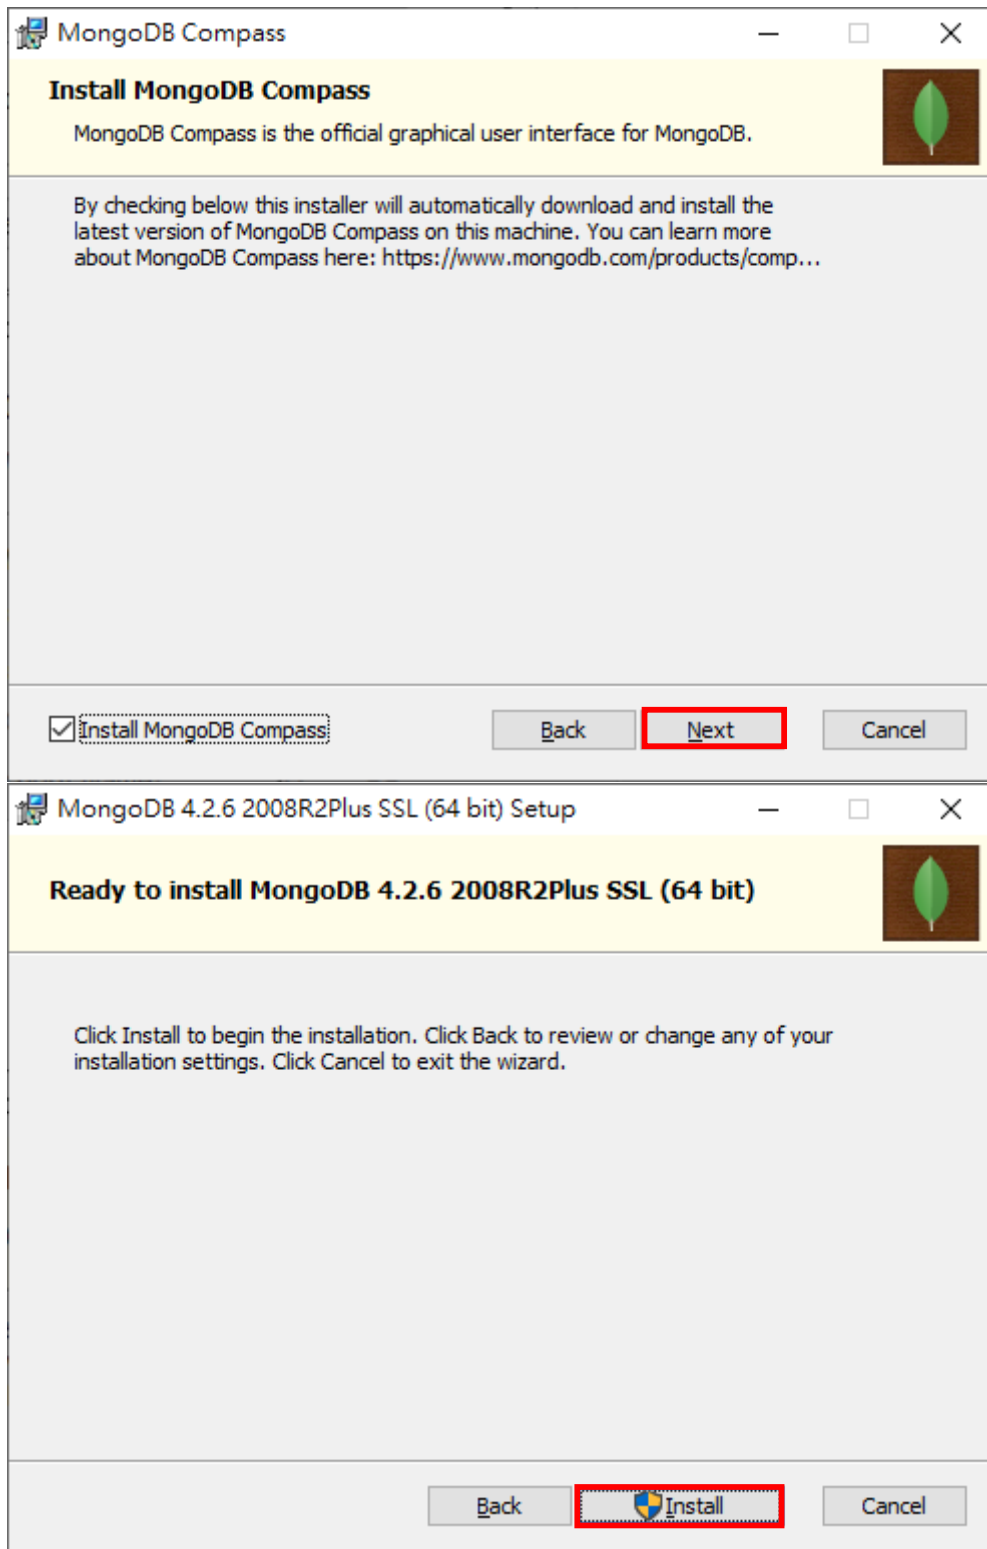

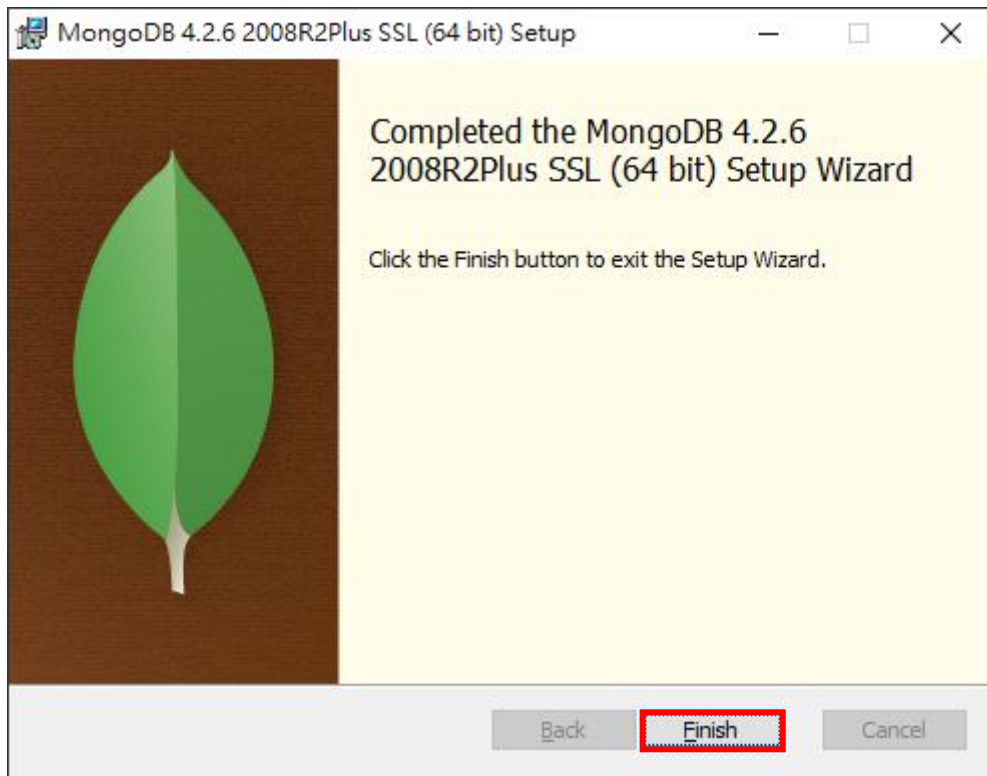



## 5 安裝 Robo 3T :

步驟一：打開「studio-3t-robo-3t-windows-double-pack」

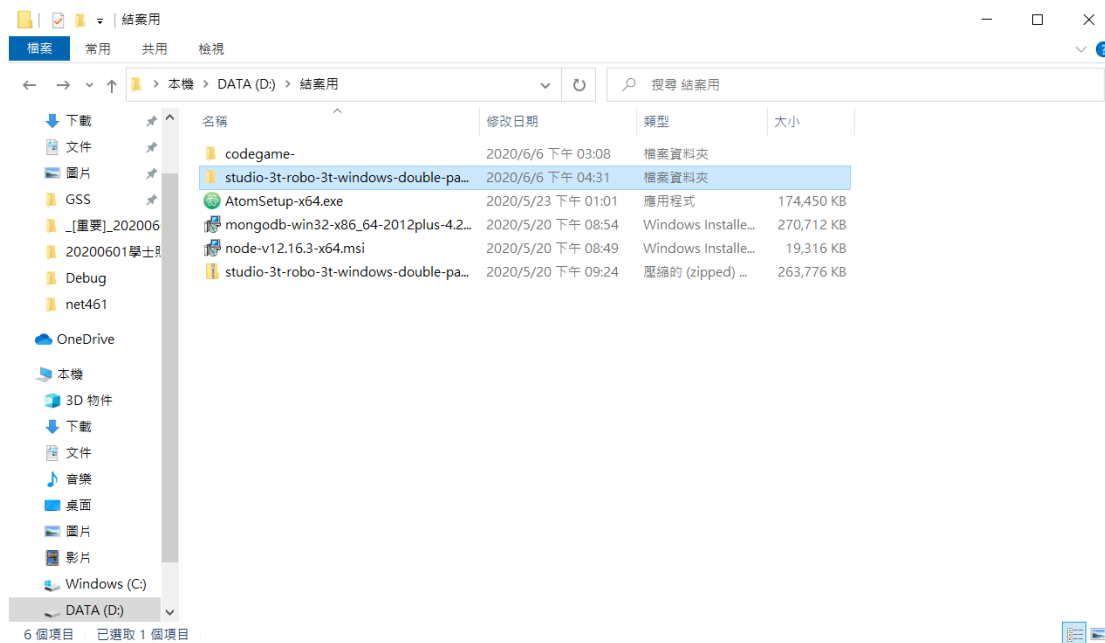

## 步驟二：執行「robo3t-1.3.1-windows-x86\_64-7419c406.exe」

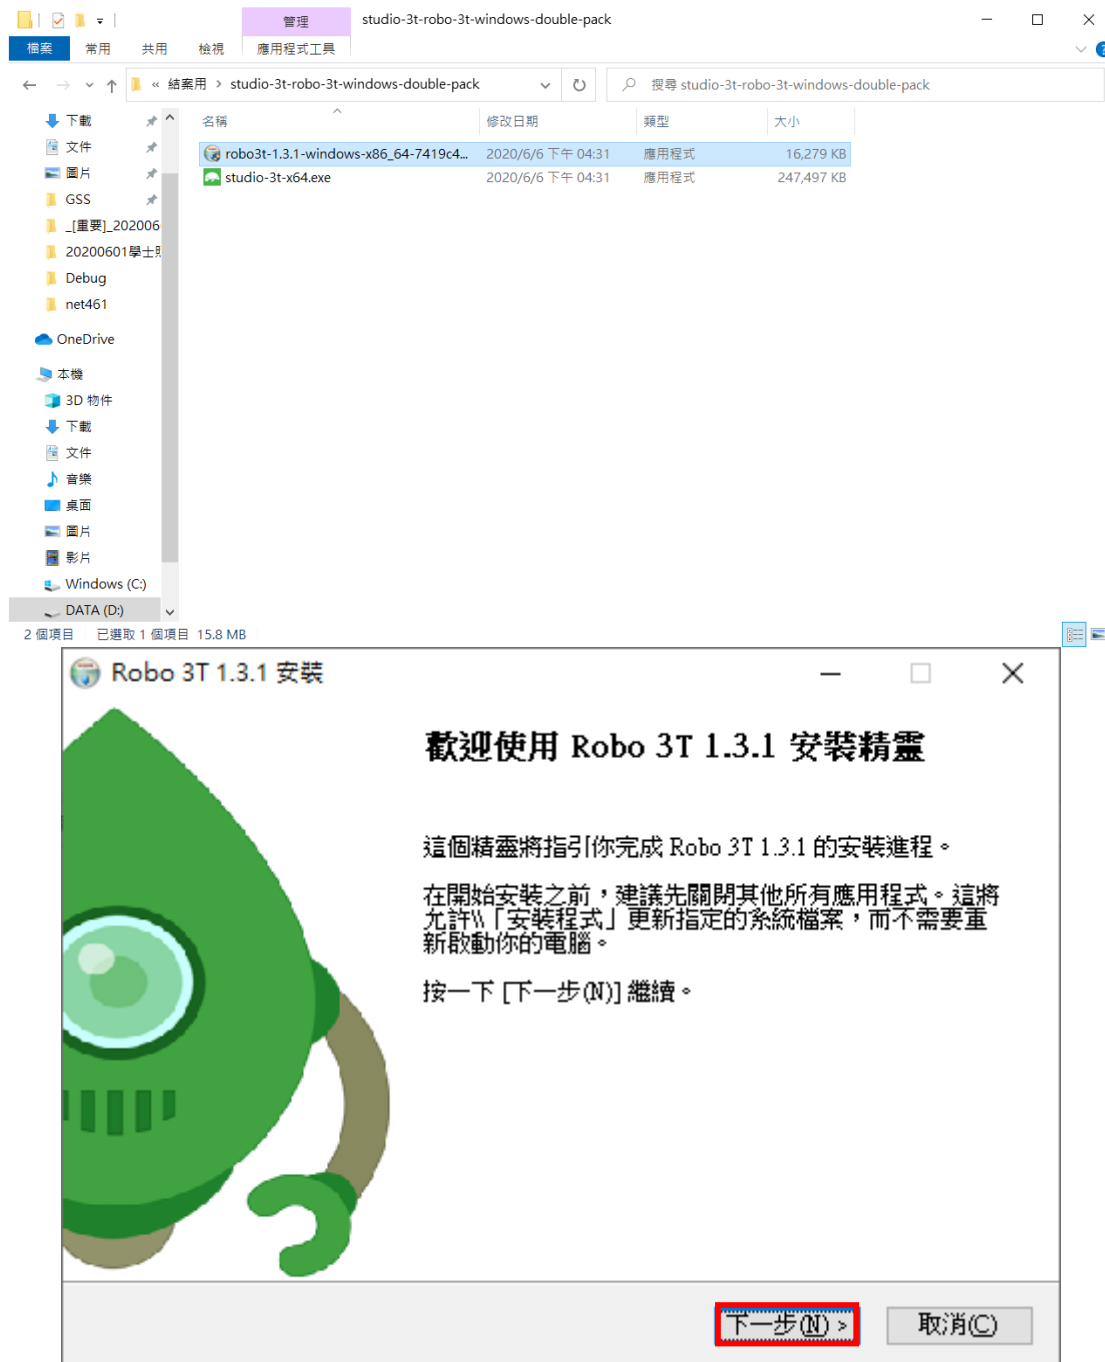

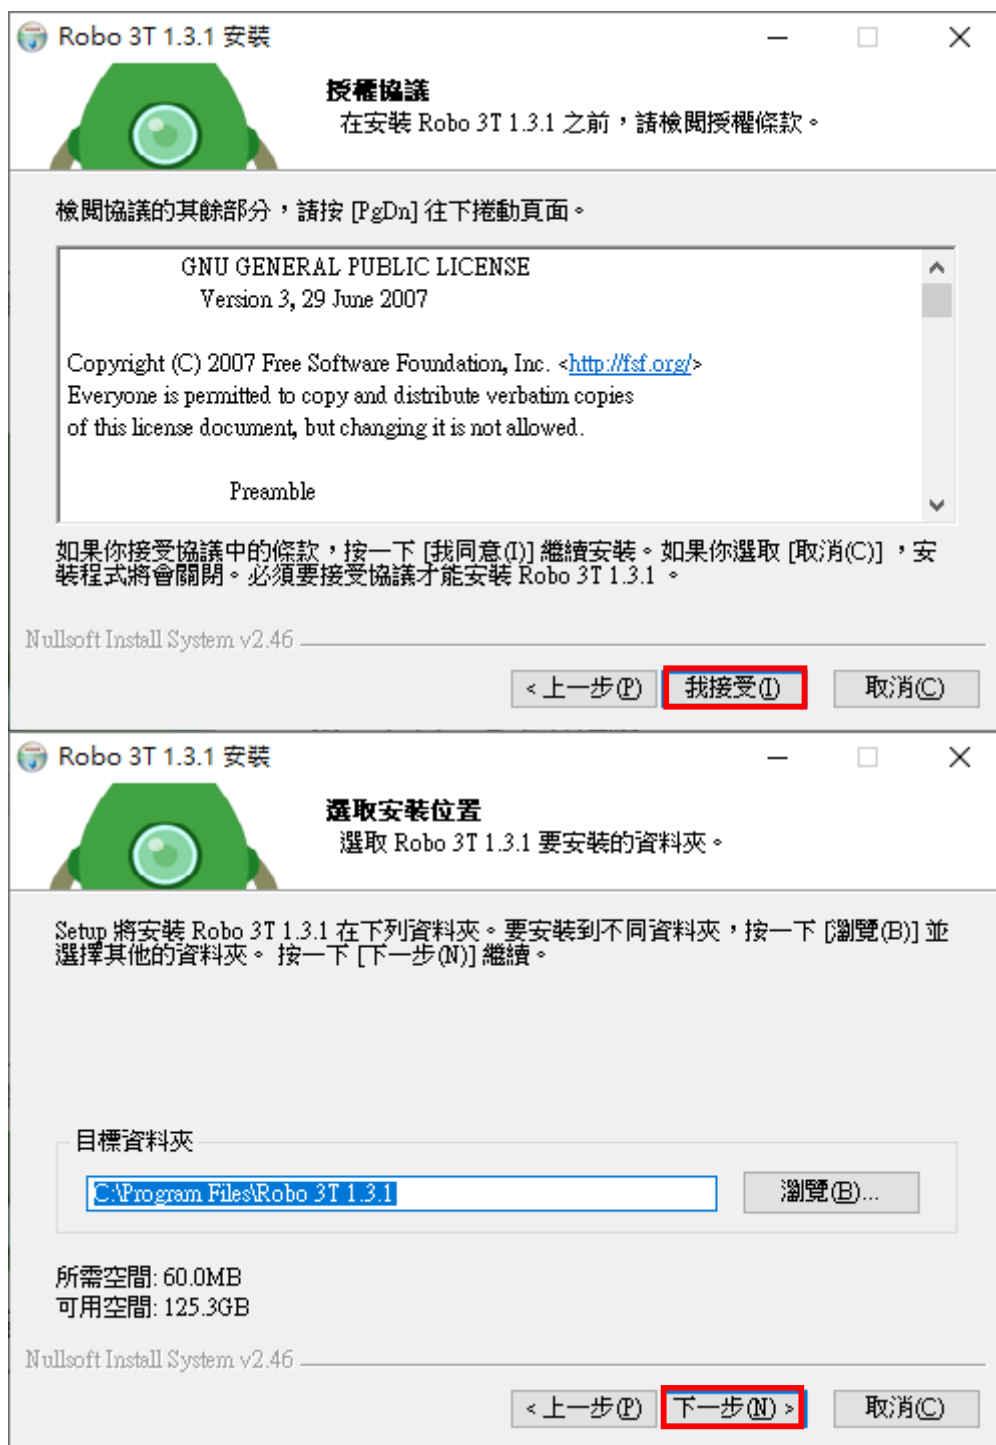







## 6 執行專案：


步驟一：進到「codegame-」資料夾內

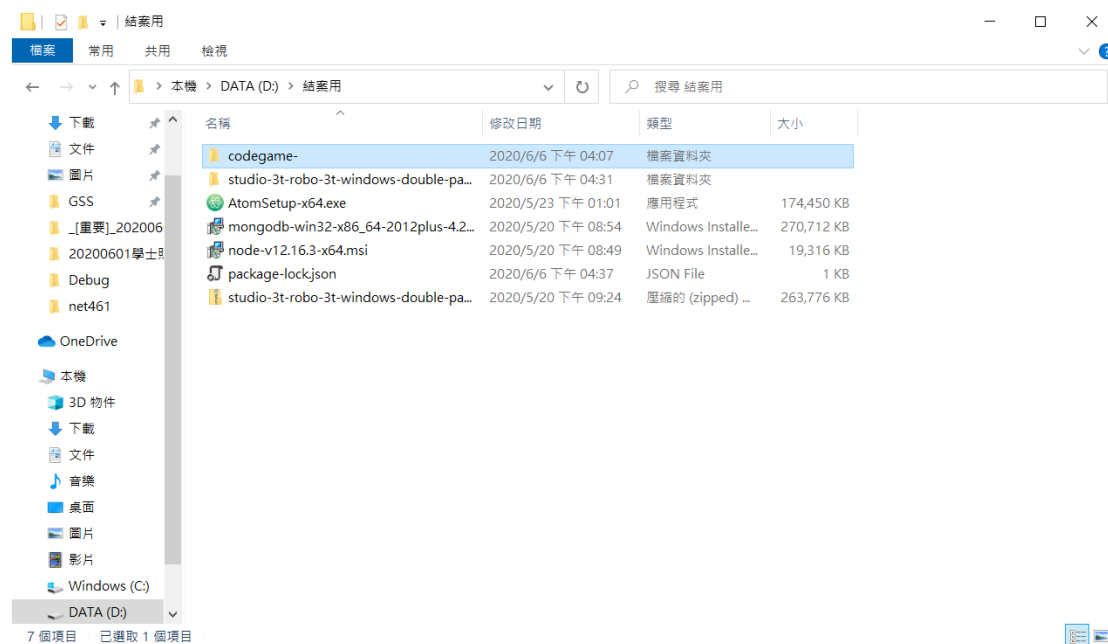


步驟二：輸入「cmd」

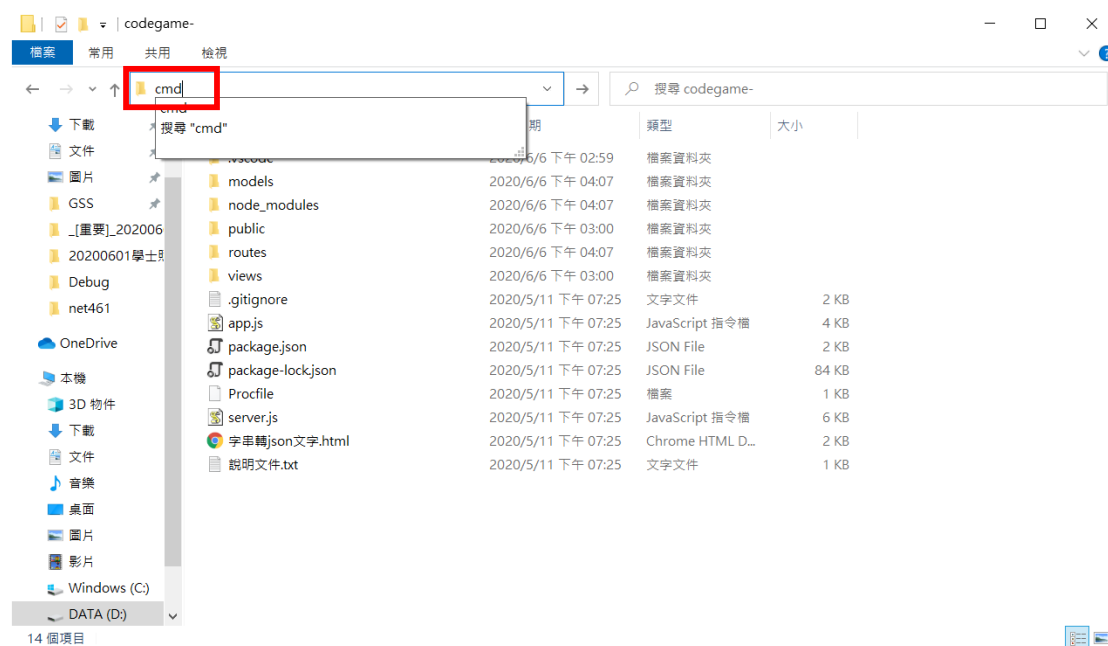

步驟三：輸入「node server.js」

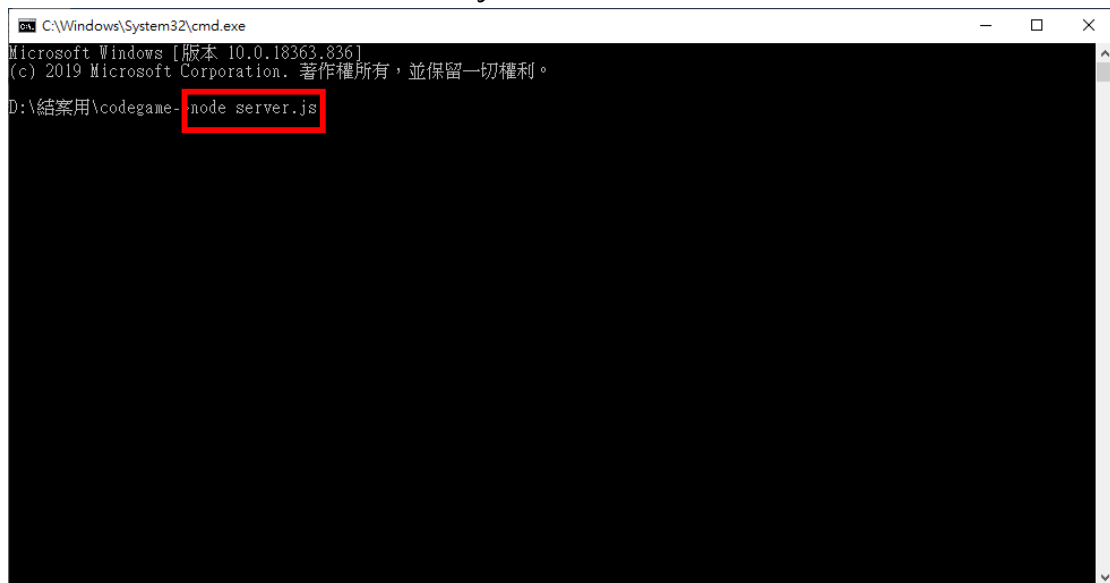

步驟四：在瀏覽器輸入 127.0.0.1:3000 或 localhost:3000 即可進入遊戲介面

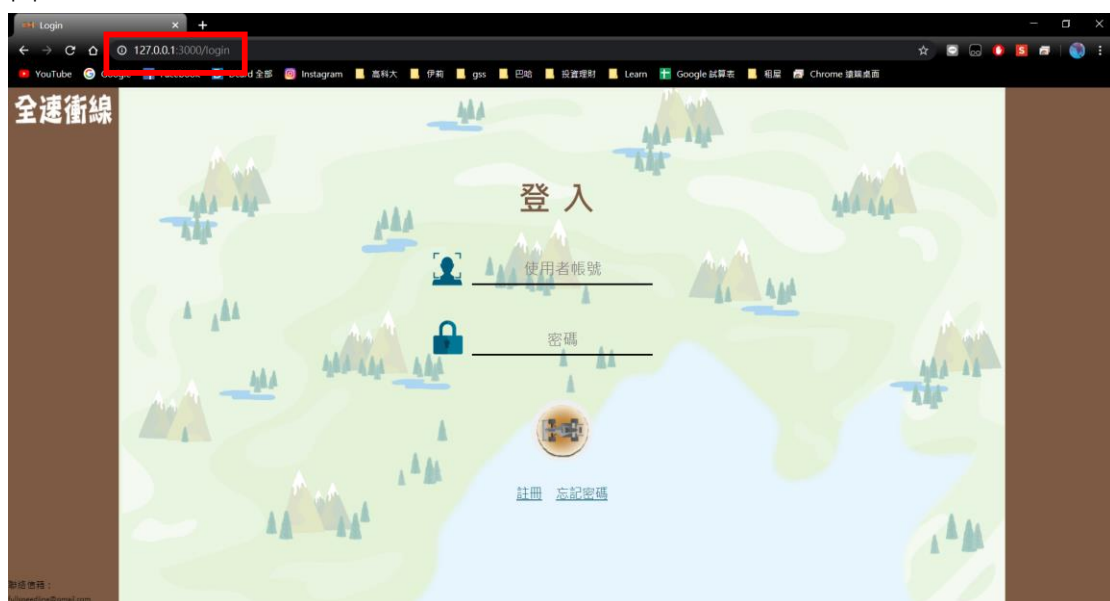

## 7 建立資料庫：

在瀏覽器輸入 <http://127.0.0.1:3000/buildDatabase> 進入遊戲資料庫建立網頁




## 8 建立管理員帳號：

步驟一：於遊戲頁面註冊帳號


帳號：NKUSTCCEA

密碼：NKUSTCCEA


其餘隨意

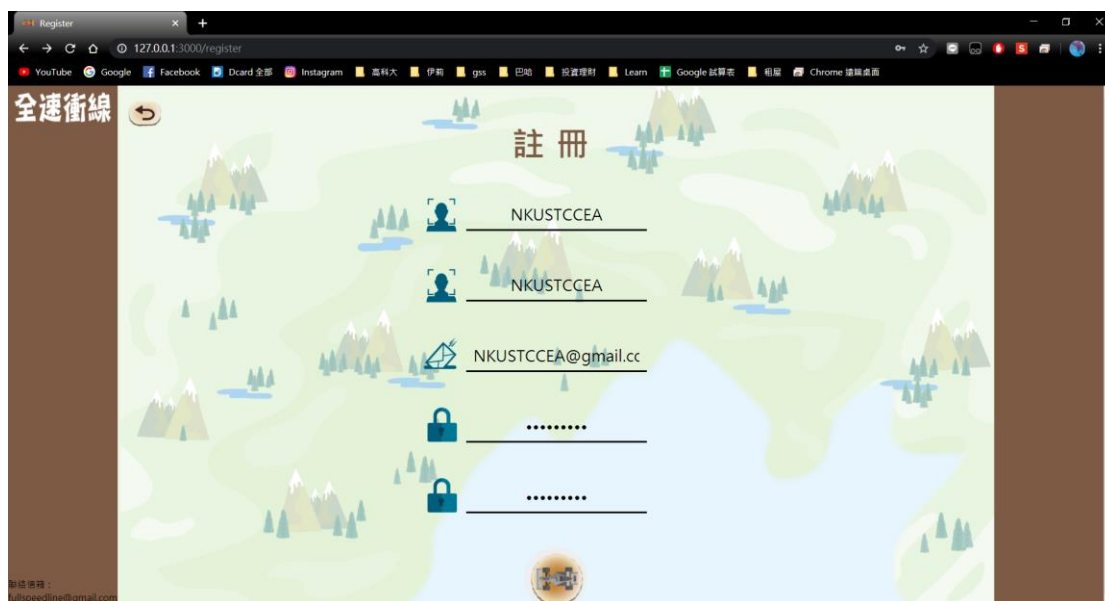


步驟二：於檔案內的/專題文件/遊戲部分 開啟「管理員權限資料.txt」

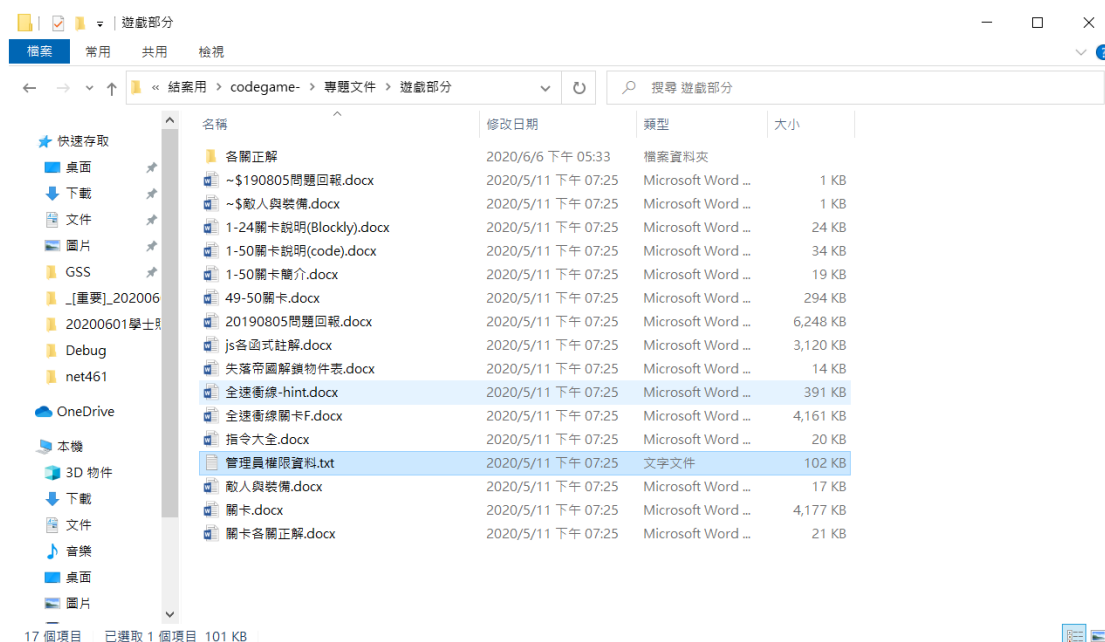


步驟三：打開 robo 3T · 點選 New Connection 進入資料庫

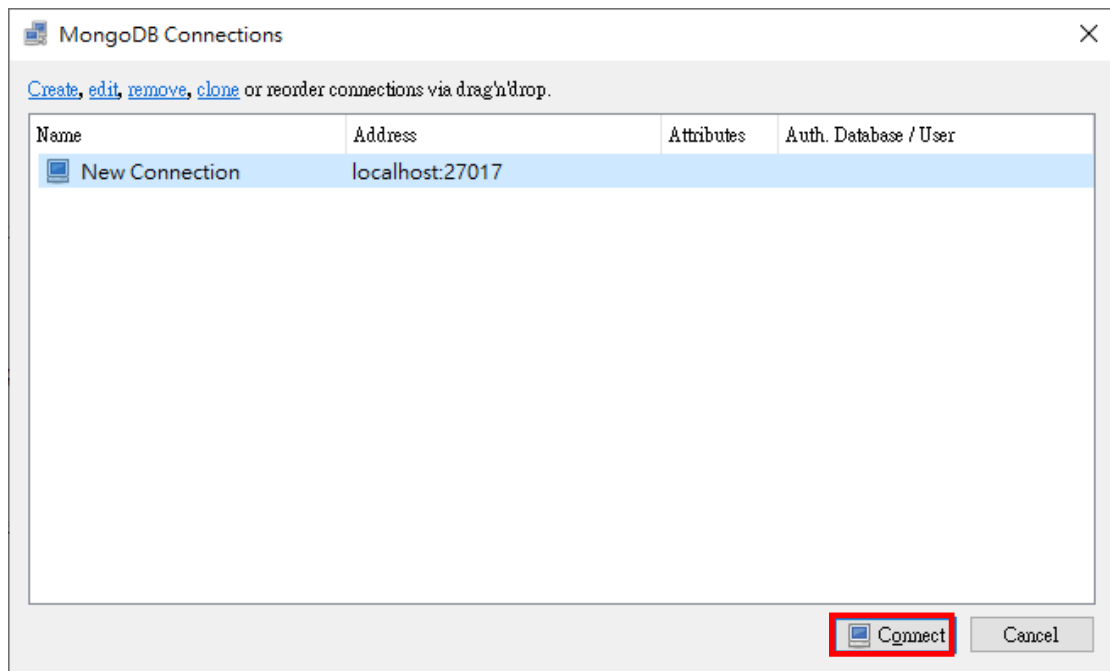

步驟四：在畫面左方選單內會看到「nodetest」的圖示，依照圖示點開後，點選「users」

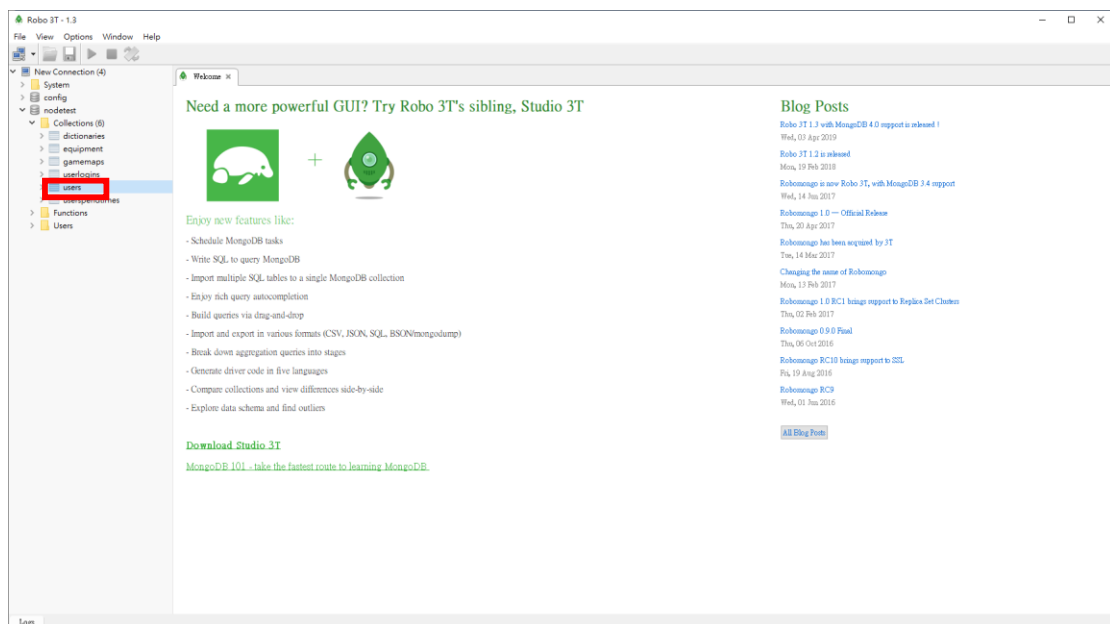

步驟五：對管理員資料點選右鍵->Edit Document...進入編輯畫面

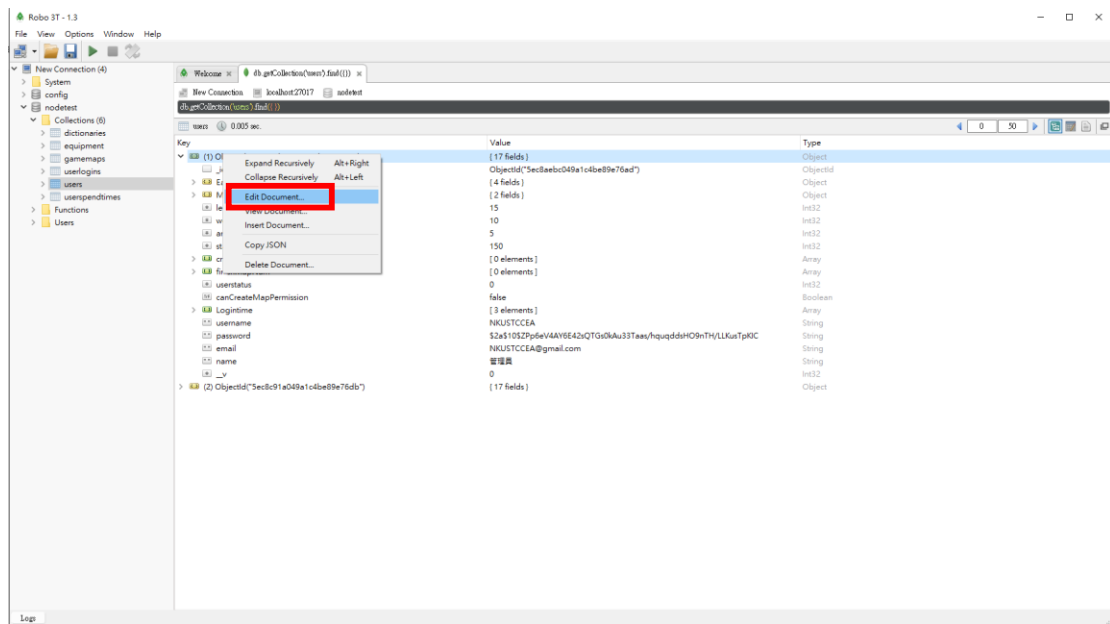

步驟六：將「管理員權限資料.text」內的所有內容複製並取代 robo 3T 內的"EasyEmpire"到"starNum": 0(不包含"逗號")的資料

