

---

# ONTOLOGIAS, GÊMEO DIGITAL E TELEMETRIA INTELIGENTE PARA A INFRAESTRUTURA DA INTERNET (DT-II)

---

 **Juliao Braga**

Center for Mathematics, Computation and Cognition  
Federal University of ABC  
Santo André, SP, BR  
juliao.braga@ufabc.edu.br

 **Jéferson Campos Nobre**

Instituto de Informática - PPGC  
Universidade Federal do Rio Grande do Sul  
Porto Alegre, RS, BR  
jcnobre@inf.ufrgs.br

 **Juliana C. Braga**

Center for Mathematics, Computation and Cognition  
Federal University of ABC  
Santo André, SP, BR  
juliana.braga@ufabc.edu.br

 **Itana Stiubiener**

Center for Mathematics, Computation and Cognition  
Federal University of ABC  
Santo André, SP, BR  
itana.stiubiener@ufabc.edu.br

 **Leandro Marcio Bertholdo**

Instituto de Informática - PPGC  
Universidade Federal do Rio Grande do Sul  
Porto Alegre, RS, BR  
leandro.bertholdo@gmail.com

 **Marcelo Santos**

Instituto de Informática  
IFSertão Pernambucano  
Salgueiro, PE, BR  
marcelo.santos@ifsertao-pe.edu.br

 **Percival Henriques**

Comitê Gestor da Internet no Brasil  
São Paulo, SP, BR  
percival@cgi.br

## ABSTRACT

This project proposes a semantic unification of the Internet infrastructure through the employment of a Top Ontology, grounded on the Unified Foundational Ontology (UFO) and formalised in the axioms of Description Logic (TBox, ABox and RBox), using the W3C Web Ontology Language (OWL). The approach relies on modelling tools such as OntoUML, which allow the use of mereology and relators to constitute a “Logical Constitution” capable of transcending specific technological implementations (such as wireless networks, fibre optics or satellite systems). The central elements are organised into a fundamental triad composed of Network Node, Connection and Channel. The integration of this rigorous model into a dynamic Knowledge Graph, associated with inference mechanisms, ensures universal semantic interoperability and enables automated fault detection, cascading-impact analysis and advanced governance management, including Service Level Agreements (SLAs) and Semantic Jurisdiction. The outcome is a Digital Twin model that transforms passive infrastructure into an autonomous and resilient system, able to provide operational intelligence and support real-time decision-making.

**Keywords** domain ontology · upper ontology · ufo · ontouml · netconf · digital twin

# 1 Introduction

The relationship between *Ontology* and the *Knowledge Graph* (KG) is central to understanding how modern *Artificial Intelligence* (AI) organises information [Kejriwal et al. \[2021\]](#), [Landgrebe and Smith \[2025\]](#), [Braga et al. \[2025\]](#). In the context of Internet Infrastructure (II), the ontology provides the logical framework, while the KG represents its dynamic instantiation. This project proposes a *Top Ontology* (UO) for II [Arp et al. \[2015\]](#), structured on four pillars:

- P1. **Theoretical Foundation:** The ontology defines classes, relations and axioms, while the KG organises facts in triples Subject-Predicate-Object. *Description Logic* (DL) [Baader et al. \[2017\]](#), [Nardi and Brachman \[2010\]](#), [Horrocks et al. \[2006\]](#) ensures computational rigour for hierarchies and constraints.
- P2. **Modelling Methodology:** Using the *OntoUML Lightweight Editor* (OLED) [Guerson et al. \[2015\]](#), [Guizzardi et al. \[2018\]](#), the ontology distinguishes essence (*Kind*) from role (*Role*), exporting models in interoperable formats such as *Turtle* and *OWL W3C OWL Working Group [2012]*.
- P3. **Top Ontology:** A **Logical Constitution** unifies subdomains (for example, 5G, satellites, optical fibres) in the triad: **Node**, **Connection** and **Channel**.
- P4. **Operational Intelligence:** A *Digital Twin* [Grieves and Vickers \[2017\]](#), [Zhou et al. \[2026\]](#), operated by an *Inference Engine*, integrates *TBox*, *ABox* and *RBox*, fundamental components of Description Logic, to detect faults and manage governance, including *Service Level Agreements* (SLA) and semantic jurisdictions<sup>1</sup>.

## 1.1 A practical roadmap for the DT-II project

DT-II is the name assigned to this project. This section describes in detail its various components. Figure 1 summarises the project's **Intelligence Cascade**.

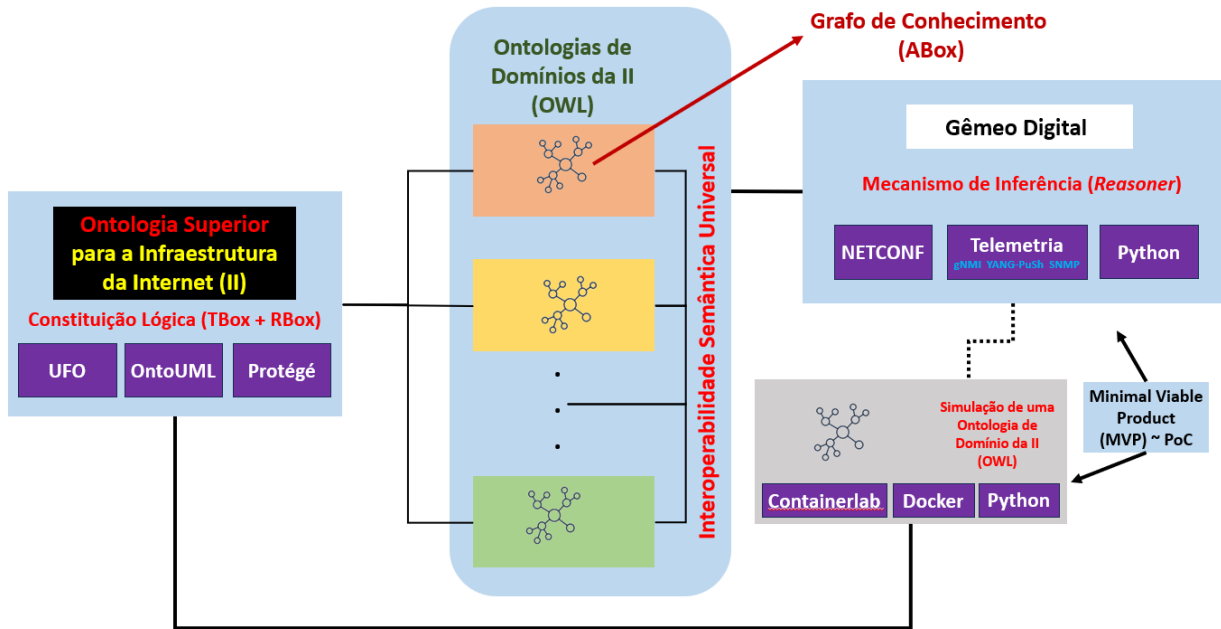


Figure 1: Overview of the DT-II Project Architecture

<sup>1</sup>Semantic Jurisdiction is understood as a normative domain of logical authority, formally established by ontological axioms, which regulates the behaviour of digital entities according to their meanings, contexts and relations. Unlike geographical boundaries or physical attributes, it is a governance layer mediated by relators, capable of propagating constraints and norms (such as legislation, service-level agreements and privacy policies) among nodes, connections and channels of an infrastructure. Its function is to ensure inter-domain compliance through automated reasoning, allowing rules to be checked, inherited and applied dynamically in data flows and network operations, guaranteeing normative integrity in complex and changing environments.

The figure shows how the UO, the DOs and the Digital Twin interact to ensure semantic interoperability<sup>2</sup> Guizzardi and Guarino [2024] and promote dynamic governance, also characterising the test environment and the *Minimal Viable Product* (MVP), in this case representing the Proof of Concept (PoC).

On 04/06/2026, the Internet had approximately **78,809** active Autonomous Systems (ASes), according to the **IPv6 CIDR Report**<sup>3</sup> maintained by Geoff Huston. Each AS has operational autonomy, with its functionality established by protocols and specialised administrators. The correctness of this functionality characterises the behaviour of the Internet from the user's perspective. A misconfiguration in an AS can propagate through the global Internet infrastructure, causing incidents with worldwide reach. For example, if an AS wrongly announces an IPv4 block via the BGP protocol, it can cause serious harm, particularly to the legitimate holder of that block. One way to prevent anomalous behaviours in the AS environment is through measurements known as **telemetries**.

These risks highlight the need for advanced monitoring mechanisms. The DT-II project proposes the simulation of ontology-based techniques (or knowledge bases) capable of establishing intelligent telemetries without human intervention. Associated with ontologies, protocols such as NETCONF and related technologies are used, widely deployed and implemented by major Internet infrastructure equipment vendors.

The project employs two types of ontologies: domain ontologies (DOs), which specify the knowledge of each AS, and the Top Ontology (UO), which ensures semantic interoperability and facilitates the construction and verification of DOs through the OntoUML tool. Although DOs are similar across most ASes, the project's innovation lies in the use of the UO, which brings benefits such as:

- Guaranteeing semantic interoperability between different domains;
- Facilitating the systematic construction and verification of DOs via OntoUML.

Additionally, the project uses *Protégé*, supported by gUFO, for modelling the DOs both in the testbed and in the ASes participating in the second phase of the research. The testbed, developed with *Containerlab*, *Docker* and *Python*, constitutes the DT-II Proof of Concept (PoC), allowing validation of the project implementation.

## 2 Methodology

This project follows the ontology engineering life cycle Keet [2025], Parks [2025], Effingham [2013], using the *Unified Foundational Ontology* (UFO) as a basis and OntoUML as the modelling language Guizzardi [2005]. The process is structured in four technical phases:

- M1. **Conceptual Abstraction:** UFO theory is applied to classify network assets. Rigid essence classes (*PhysicalElement*, *MaterialMedium*) define identity, while accidental roles (*NetworkNode*, *CommunicationChannel*) are linked by Relators.
- M2. **Formalisation in Description Logic (DL):** Concepts are axiomatized in DL, ensuring computational interpretability. For example, every *NetworkNode* must have a logical identifier:
 
$$\text{NetworkNode} \sqsubseteq \text{PhysicalElement} \sqcap \exists \text{possesses}.\text{LogicalIdentifier} \quad (1)$$
- M3. **Semantic Serialisation:** Models validated in *OLED* are exported to OWL and serialised in *Turtle*. Standardised vocabularies such as *Dublin Core* (DC) and *FOAF* provide support for metadata and provenance.
- M4. **Automated Reasoning:** Inference engines confront the *TBox* and the *ABox* to check consistency and detect anomalies. Predicate logic allows deduction of failure states; for example, an inactive Channel implies compromise of its logical connection.

### 2.1 Ontological Analysis Structure and Mapping Process

The mapping between the II domain and UFO, via its gUFO implementation, follows a specialisation protocol grounded on logical metaproperties. For each local domain entity, the **Ontological Analysis Structure** is applied Almeida et al. [2026, 2019], Guizzardi [2005]:

- A. **Specialisation of Fundamental Types:** Entities with rigid identity and specific individuation principles (for example, *Physical Routers*, *Satellites*, *Fibre Cables*) are mapped as subclasses of *gufo:Kind*. These represent substantial objects that persist independently of their configuration state.

<sup>2</sup>Semantic interoperability refers to the ability to connect different information systems by accurately understanding how the real-world entities represented in those diverse systems relate to each other, going beyond simple packet exchange (technical interoperability) or data-format understanding (syntactic interoperability).

<sup>3</sup><https://www.cidr-report.org/>

- B. **Relational Specialisation (Roles):** Concepts whose existence depends on a specific topological or functional context (for example, Edge Node, Peering Point, Transit AS) are characterised as *gufo:Role*. This allows the Digital Twin to capture the dynamic nature of network functions independently of the underlying hardware.
- C. **Relational Foundations:** Logical connections and service agreements that establish dependencies among multiple objects (for example, BGP Sessions, SLA Agreements) are formalised as *gufo:Relator*. This ensures that the integrity of the Knowledge Graph is maintained through the existential dependency constraints inherent to gUFO, where the invalidation of a relator triggers the logical removal of associated roles.

By employing this structure, DT-II transcends mere data modelling, establishing a **Logical Constitution** in which network behaviour is governed by fundamental ontological axioms rather than purely heuristic or statistical patterns.

## 2.2 Dynamic Synchronisation via YANG-Push

A critical requirement for DT-II is high-fidelity synchronisation between physical infrastructure and its semantic representation. To achieve this, the model employs *Model-Driven Telemetry* (MDT) via the **YANG-Push** mechanism (RFC 8641 Clemm and Voit [2019]).

Unlike traditional query-based (*pull*) monitoring, YANG-Push allows Network Nodes to directly stream state changes to the *Semantic Ingestor*. This integration is mapped into the gUFO framework as follows:

- **Periodic Subscriptions:** Quantitative metrics, such as interface counters, are streamed to update *gufo:Quality* assertions in the ABox.
- **Change Notifications:** Critical events, such as oscillations in BGP sessions, are treated as *gufo:Events* that immediately trigger re-evaluation of existential dependencies in *gufo:Relators*.

This ensures that the Digital Twin’s Logical Constitution always reflects the current operational state of ASes with sub-second latency.

## 3 Relations between Ontology, Knowledge Graph and Description Logic

The *Knowledge Graph* (KG) operationalises the ontology by linking **real data** (instances) to the conceptual model. It represents information as **nodes** (entities) connected by **edges** (relations). For example, the node *The Godfather* is linked to *Francis Ford Coppola* via *directed\_by*. Typically, a KG integrates multiple sources to form a network of interconnected facts.

Ontology and KG are **complementary**: the ontology provides semantics and logical rules, while the KG instantiates them as a dynamic, queryable knowledge base. Table 1 summarises their roles in the proposed framework.

Table 1: Complementarity between Ontology and Knowledge Graph

| Characteristic  | Ontology                        | Knowledge Graph                |
|-----------------|---------------------------------|--------------------------------|
| <b>Focus</b>    | Definitions, rules, logic.      | Data, facts, connections.      |
| <b>Level</b>    | Abstract (the “DNA”).           | Concrete (the “Organism”).     |
| <b>Function</b> | Provides meaning and semantics. | Enables queries and discovery. |

Description Logic (DL) underpins modern ontologies (for example, OWL on the Semantic Web) Baader et al. [2017]. DL enables the formal definition of concepts and computational reasoning. For example, the axiom:

$$\text{Director} \sqsubseteq \text{Person}$$

establishes that every Director is a Person. More complex definitions use logical connectives, such as:

$$\text{Filmmaker} \equiv \text{Person} \sqcap \exists \text{directed.Film}$$

meaning that a Filmmaker is a Person who has directed at least one Film. Here,  $\sqcap$  denotes intersection (AND), ensuring precise semantic constraints.

In summary, the ontology provides the logical and semantic structure, while the KG materialises that structure in concrete data. DL acts as the formal link between them, ensuring consistency, interpretability and inferencing capability.

This triad — Ontology, KG and DL — constitutes the methodological core of DT-II, enabling the Internet infrastructure to be represented, monitored and governed semantically and dynamically.

## 4 Conceptual Structure of the Digital Twin

This section presents a **reference architecture** for implementing the Internet Infrastructure Digital Twin (II) as an **operational KG** (*ABox*) governed by a *UO* (*TBox*, *RBox*). The objective is to make the model executable: collect, normalise, validate, infer and support decisions. The implementation objectives are:

- (a) **Unified semantic inventory**: represent nodes, connections and channels regardless of technology;
- (b) **Continuous synchronisation**: align the KG with telemetry and topology changes;
- (c) **Detection and diagnosis**: identify inconsistencies, faults and cascading impacts; and (d) **Verifiable governance**: encode and audit rules (SLA, jurisdiction, authorisation).

### 4.1 Reference Architecture

The architecture is organised into seven layers:

- (i) **Ontological Layer** (*TBox*): defines central classes (*NetworkNode*, *Connection*, *Channel*) and constraints;
- (ii) **Identity Layer**: assigns stable IRIs to instances, separating identity from state;
- (iii) **Ingestion Layer**: collects telemetry (YANG-Push, gNMI, SNMP, syslog) and normalises data into the Node–Connection–Channel triad;
- (iv) **Persistence Layer** (*ABox*, *RBox*): stores facts in RDF/OWL triplestores and keeps temporal history via observations;
- (v) **Validation Layer**: applies structural constraints and logical consistency checks with DL reasoners;
- (vi) **Reasoning Layer**: infers states (*DegradedConnection*, *SLAViolation*) and propagates failures;
- (vii) **Exposure Layer**: provides SPARQL queries, dashboards, alerts and integration with NOC/orchestration systems.

### 4.2 Minimum Data Model

The initial implementation focuses on three entities:

- (a) **Node**: identity (*hasIdentifier*), operational state, timestamp;
- (b) **Connection**: endpoints (*connectNode*), supported channel, metrics (latency, loss, jitter);
- (c) **Channel**: medium type (fibre, copper, radio), capacity, QoS policy.

### 4.3 Integration of *ABox* and *RBox*

The *ABox* instantiates infrastructure elements (routers, links, channels) from inventory data [Claise et al. \[2019\]](#). The *RBox*, based on *SRIOQ* logic [Horrocks et al. \[2006\]](#), governs relational properties:

- (a) **Transitivity**: deduces cascading failures;
- (b) **Mereology**: validates part–whole relations for SLA compliance [\[Effingham, 2013, Chap. 8\]](#);
- (c) **Property chains**: enable bidirectional navigation and anomaly tracing.

Together, *ABox* and *RBox* turn the KG into a computable model, enabling dynamic reasoning and governance.

### 4.4 Operational Flow

- F1. Ingestion → normalisation → triple generation.
- F2. Validation → integrity checks and anomaly detection.
- F3. Inference → classification and rule-based derivations.
- F4. Query/alert → recommendations or automated orchestration.

## 4.5 Example Scenario

In a fibre link failure:

- (a) telemetry marks the `Channel` as unavailable;
- (b) inference classifies the `Connection` as `InactiveConnection` and derives `SLAViolation`;
- (c) redundancy is triggered (for example, satellite backup).

**In summary**, the Digital Twin evolves into an **executable knowledge system**, where the **TBox** governs meaning and rules, and **ABox/RBox** capture state, validate consistency and enable inference, turning data into actionable decisions.

## 5 Use Cases

### 5.1 Use Case I: Semantic Jurisdiction and Logical Governance in DT-II

Semantic Jurisdiction is the DT-II governance mechanism that establishes authority and normative compliance over digital entities based on meaning, context and relations — transcending traditional geophysical boundaries. In this model, jurisdiction ceases to be a static hardware attribute and becomes a **normative entity mediated by Relators**.

#### 5.1.1 Foundation and Axiomatization

Defined in the **TBox** through restriction axioms, Semantic Jurisdiction uses the Reasoner to determine which norms (for example, LGPD, GDPR, SLAs) apply to data flows in real time. In the **RBox**, property chains formalise propagation: if a `NetworkNode` is bound to a legal norm, all `Channels` and `Connections` mediated by Relators inherit the same restrictions.

#### 5.1.2 Role of the Digital Twin

The Digital Twin acts as the guardian of jurisdiction. By ingesting telemetry (gNMI, YANG-Push, SNMP), the system populates the **ABox**. Through **Semantic Elevation**, it checks whether, for example, a health-data packet traverses a node under a jurisdiction that does not meet privacy requirements defined in the **TBox**.

#### 5.1.3 Operationalisation and Resilience

In dynamic events (such as DDoS attacks or BGP failures), Semantic Jurisdiction guides the **MAPE-K** cycle **Murch [2004]**:

- (a) **Analysis**: the Reasoner detects violations of jurisdictional axioms;
- (b) **Planning**: the system seeks conforming alternatives;
- (c) **Execution**: configuration is applied via **NETCONF** only after logical validation.

**In summary**, Semantic Jurisdiction provides DT-II with a logical governance mechanism capable of ensuring normative compliance in real time, strengthening the Internet infrastructure's resilience against incidents and attacks.

## 6 Conclusion and Future Works

This paper introduced the conceptual foundations of the **DT-II**, a Digital Twin for Internet Infrastructure grounded in Ontology, Knowledge Graphs, and Description Logic. By formalizing governance through **Semantic Jurisdiction** and enabling policy-driven responses to complex events such as DDoS attacks, the model advances the vision of transforming II from a passive infrastructure into an **autonomic, legally aware system**. The proposed architecture demonstrates how ontological rigor can ensure resilience, compliance, and semantic interoperability across heterogeneous domains. All results from this project will be made available at <https://github.com/LJuliaoBraga/dtii/tree/main>.

Future work will focus on:

- (i) simulation of the Digital Twin to evaluate alarms in Autonomous Systems (AS);
- (ii) experimental validation of spatiotemporal response mechanisms;



- (iii) integration with programmable infrastructures via *NETCONF*;
- (iv) exploration of semantic interoperability across domains such as 5G, satellite, and SD-WAN;
- (v) to participate in the evaluation of the two proposed telemetry alternatives—YANG-Push and gNMI—while also remaining open to those that may emerge in the near future; and
- (vi) Integration with Quantum Key Distribution (QKD) and Quantum Internet: We plan to explore the use of Quantum Communication channels for the transmission of highly sensitive telemetry and governance metadata between the Active Infrastructure and the Digital Twin. As the DT-II handles critical "Semantic Jurisdictions" involving state-level privacy and strategic infrastructure topology, the integration of QKD will ensure that the synchronization between the physical and logical layers remains secure even against future quantum computing adversarial threats, maintaining the "Logical Constitution's" integrity through a provably secure quantum-classical hybrid architecture Kozłowski et al. [2023], Wang et al. [2024], Meter [2014].

These steps aim to evolve the design of the conceptual model to experimental deployment, culminating in its 2026 submission as a draft to the IRTF *nmrg* within the CGI-IETF initiative, in collaboration with the following Brazilian universities: UFABC (SP), UFRGS (RS), IFSPe (PE), and UNICAP (PE).

## 7 Acknowledgements

The authors thank CGI.br for supporting the CGI-IETF Project, as well as the research groups and universities involved. Special thanks to colleagues and students who contributed with discussions, preliminary experiments and ontological modelling activities.

## Statement on Generative AI

During the preparation of this work, the authors used Gemini and Copilot exclusively for grammar and spelling checks in Portuguese and English. Support was obtained for translations and relevant evaluations. All substantive content, analysis and conclusions were produced by the authors, who reviewed and edited the text as necessary and assume full responsibility for the publication's content.

## References

- [1] João Paulo A. Almeida, Giancarlo Guizzardi, Tiago P. Sales, and Ricardo A. Falbo. gufo: A lightweight implementation of the unified foundational ontology (ufo). <http://purl.org/nemo/doc/gufo>, 2019. 3
- [2] João Paulo A. Almeida, Giancarlo Guizzardi, Tiago Prince Sales, and Claudenir M. Fonseca. gUFO: A Gentle Foundational Ontology for Semantic Web Knowledge Graphs, 2026. URL <https://arxiv.org/abs/2603.20948>. 3
- [3] Robert Arp, Barry Smith, and Andrew D. Spear. *Building Ontologies with Basic Formal Ontology*. The MIT Press, Cambridge, MA, USA, 1 edition, 2015. ISBN 978-0-262-52781-1. 2
- [4] Franz Baader, Ian Horrocks, Carsten Lutz, and Uli Sattler. *Introduction to Description Logic*. Cambridge University Press, Cambridge, UK, 2017. ISBN 978-1107002781. 2, 4
- [5] Juliao Braga, Percival Henriques, Juliana Cristina Braga, Jéferson Campos Nobre, and Itana Stiubiener. *Bases de Conhecimento*. Editora Publius, Recife, PE, Brazil, 1a. edition, 2025. ISBN 978-65-85007-43-6. 2
- [6] Benoit Claise, Joe Clarke, and Jan Lindblad. *Network programmability with YANG: the structure of network automation with YANG, NETCONF, RESTCONF, and gNMI*. Addison-Wesley Professional, Boston, MA, USA, 2019. ISBN 978-0-13-518039-6. 5
- [7] Alexander Clemm and Eric Voit. Subscription to yang notifications for datastore updates. Technical Report 8641, IETF, September 2019. URL <https://www.rfc-editor.org/info/rfc8641>. 4
- [8] Nikk Effingham. *An Introduction to Ontology*. Polity Press, Cambridge, UK; Malden, MA, USA, 2013. ISBN 978-0-7456-5254-2. 3, 5
- [9] Michael Grieves and John Vickers. Digital Twin: Manufacturing Excellence through Virtual Factory Replication. NASA Technical Report NASA/TM-2017-219363, NASA, 2017. Disponível em: <https://ntrs.nasa.gov>. 2

- [10] John Guerson, Tiago Prince Sales, Giancarlo Guizzardi, and João Paulo A. Almeida. Ontouml lightweight editor. In *2015 19th IEEE International Enterprise Distributed Object Computing Conference (EDOC)*, pages 144–153, Adelaide, Australia, 2015. IEEE. doi:[10.1109/EDOC.2015.30](https://doi.org/10.1109/EDOC.2015.30). URL <https://doi.org/10.1109/EDOC.2015.30>. 2
- [11] Giancarlo Guizzardi. *Ontological Foundations for Structural Conceptual Models*. Universal Press, Enschede, The Netherlands, 2005. ISBN 9036723364. CTIT Ph.D. Thesis Series. 3
- [12] Giancarlo Guizzardi and Nicola Guarino. Explanation, semantics, and ontology. *Data Knowledge Engineering*, 153:1–27, 2024. doi:[10.1016/j.datak.2024.102325](https://doi.org/10.1016/j.datak.2024.102325). 3
- [13] Giancarlo Guizzardi, Claudenir M. Fonseca, Alessandro Botti Benevides, João Paulo A. Almeida, Daniele Porello, and Tiago Prince Sales. Endurant types in ontology-driven conceptual modeling: Towards ontoUML 2.0. In *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, volume 11157, pages 136–150, Cham, Switzerland, 2018. Springer. ISBN 978-3-030-00846-8. doi:[10.1007/978-3-030-00846-8\\_2](https://doi.org/10.1007/978-3-030-00846-8_2). 2
- [14] Ian Horrocks, Oliver Kutz, and Ulrike Sattler. The Even More Irresistible SROIQ. In *Proceedings of the 10th International Conference on Principles of Knowledge Representation and Reasoning (KR)*, pages 57–67, Lake District, United Kingdom, 2006. AAAI Press. 2, 5
- [15] C. Maria Keet. *An Introduction to Ontology Engineering*. College Publications, UK, second edition, 2025. ISBN 978-1-84890-020-2. 3
- [16] Mayank Kejriwal, Craig A. Knoblock, and Pedro Szekely. *Knowledge Graphs: Fundamentals, Techniques, and Applications*. MIT Press, Cambridge, Massachusetts, USA, 2021. ISBN 9780262045094. 2
- [17] Wojciech Kozłowski, Stephanie Wehner, Rodney Van Meter, Bruno Rijsman, Angela Sara Cacciapuoti, Marcello Caleffi, and Shota Nagayama. Architectural principles for a quantum internet. RFC 9340, March 2023. URL <https://www.rfc-editor.org/info/rfc9340>. 7
- [18] Jobst Landgrebe and Barry Smith. *Why Machines Will Never Rule the World: Artificial Intelligence without Fear*. Routledge, London and New York, 2 edition, 2025. ISBN 978-1-032-94140-0. 2
- [19] Rodney Van Meter. *Quantum Networking*. Wiley-ISTE, Hoboken, NJ, 2014. ISBN 978-1-84821-537-5. 7
- [20] Richard Murch. *Autonomic Computing*. IBM Press, Armonk, New York, USA, 2004. ISBN 978-0131440258. 6
- [21] Daniele Nardi and Ronald J. Brachman. *An Introduction to Description Logics*, volume 1, page 40. Cambridge University Press, Cambridge, United Kingdom, 2 edition, 2010. ISBN 978-0-521-15011-8. 2
- [22] Brandon A. Parks. *An Introduction to Ontology Engineering: Foundations, Methods, and Practice. Build and Validate Knowledge Graphs*. Independently Published, September 2025. ISBN 9798267011358. 3
- [23] W3C OWL Working Group. OWL 2 Web Ontology Language Document Overview (Second Edition). W3C Recommendation, October 2012. URL <https://www.w3.org/TR/owl2-overview/>. 2
- [24] Chonggang Wang, Akbar Rahman, Ruidong Li, Melchior Aelmans, and Kaushik Chakraborty. Application scenarios for the quantum internet. RFC 9583, June 2024. URL <https://www.rfc-editor.org/info/rfc9583>. 7
- [25] Cheng Zhou, Hongwei Yang, Xiaodong Duan, Diego Lopez, Antonio Pastor, Qin Wu, Mohamed Boucadair, and Christian Jacquenet. Network digital twin concept. Internet-Draft draft-irtf-nmrg-network-digital-twin-arch-12, Internet Engineering Task Force (IETF), February 2026. Work in Progress. 2