

# A Chance to Work

Understanding the composition of foreign workers pursuing specialty occupations on the United States

H1-B visa

**Alexander Buddenbaum**

Georgia Institute of Technology  
Shenzhen, China  
alex.budd@gatech.edu

**Qinrui Li**

Georgia Institute of Technology  
Shenzhen, China  
qli449@gatech.edu

**Tianyu Li**

Georgia Institute of Technology  
Shenzhen, China  
tli303@gatech.edu

**Chuanqi Liu**

Georgia Institute of Technology  
Shenzhen, China  
cliu732@gatech.edu

**Tianshu Tao**

Georgia Institute of Technology  
Shenzhen, China  
ttao35@gatech.edu

## 1 INTRODUCTION

The H1-B visa program allows employers in the United States to hire temporary foreign workers specializing in one of many key occupations. To date, numerous studies have been conducted on recent years' certification data in an attempt to analyze hiring trends. However, the usefulness of these studies remains to be questioned as they generally lack interactive visualizations for the user to gain insight from this information. In this study, we seek to understand recent hiring trends among US employers as well as the makeup of applications for these roles to project economic sectors with growth potential, creating meaningful visualizations for potential work visa applicants to interpret current data, and predict the outcome of future applications.

## 2 RELATED WORK

As annual H1-B application records are publicly available through the US Department of Labor, this data has been a popular topic for machine learning researchers as well as online enthusiasts. The topic has also inspired several versions of truncated datasets that have been aggregated by several websites as a resource for international applicants, and basic analyses appear frequently in academic journals. The general consensus among scholarly literature points to an overall positive economic impact by H1-B workers in the United States (Butler 2012, Peri 2014) and skilled immigrant workers successfully integrate into the general population (Grimm 2019, Hermansen 2022). Interestingly, none of these studies or websites have successfully integrated the database, visualizations, and prediction algorithms under one application.

We have considered several methods for data cleaning and integration. H1-B application data from the US DOL total over 3 million records from 2017 to 2021. Chatterjee et al., use Python packages Pandas and Numpy for data cleansing, including the completion of incomplete data in H1-B application data, column name renaming and subset selection (Chatterjee 2021). Specific operations can be done by calling Python packages. Looking closely at their data, however, we found that not only is it from a non-official and unverifiable source; their records are also severely truncated, and did not effectively consolidate job titles with negligible spelling variations. Perhaps this truncation and lack of cleansing was out of convenience, but unfortunately this was the case for the majority of

studies we read during preliminary research. As the datasets among the different years generally only differ by a few column names while retaining similar organization, we find it more convenient to use open-sourced applications such as OpenRefine to clean the data, selecting features that may be the most meaningful to the reader (Chadha 2021). Dombe et al. use SQLite for its lightweight data storage and access (Dombe 2020).

Several online databases exist providing similar information. The most accurate and comprehensive websites include H1-B Grader and One Point Three Acres, which have aggregated US Department of Labor statistics into textual tables which allow for filtering based on attributes such as country of origin, job title, sponsoring employer, and salary band (1Point3Acres 2022, H1BGrader 2022). These are relatively complete relational database systems with interactive visualizations. The data is also collected directly from the US DOL and up to date. As the data provided by US DOL is in XLS format and consists of over 26 attributes in its initial form, the SQL-style database used by these websites appears most appropriate. However, these websites are unable to predict application outcomes for users, thus the users must perform their own extrapolations based on their subjective interpretations of recent trends.

Most academic studies rely on various Python libraries for visualizations. Tandon et al compares Python and Tableau as accessible technologies for quickly producing charts (Tandon 2021). A similar approach is taken by Chavda et al, analyzing records with Apache Hive and Pig with Tableau visualizations (Chavda 2019). We elected to use D3 in Javascript for its rich features and greater availability of documentation for creating interactive charts.

The majority of the research to date compares the performance of several machine learning algorithms in predicting application outcomes. Random Forest appears to be the most popular model among other studies (Sundararaman 2017), but other methods have been tested as well. Swain et al. compared the accuracy of random forest, k-means clustering, and logistic regression algorithms for predicting H1-B application acceptance based on roughly 3 million data points from 2011 to 2016 (Swain 2018), and Chatterjee et al. propose an artificial neural network (Chatterjee 2021). They also show a variety of static charts, but the charts only compare across one dimension at a time. The data is also nearly ten years old. While these studies set us in a good direction for doing some

basic analysis, we seek to augment them through an interactive visualization allowing the user to view results based on multiple attributes such as salary and location. Thakur et al apply seven classification models - Decision tree, C5.0, Random Forest, Naïve Bayes, Neural Network and SVM - to predict the status of each H1-B application (Thakur 2018). Interestingly, their C5.0 decision tree model proved the most accurate on the same data set used by Swain et al in their research. Their liberal use of bar charts makes some of their findings hard to follow. Similar results were found by Jethwani et al, who achieved the highest prediction accuracy with a decision tree as opposed to random forest and logistic regression (Jethwani 2019). We will run a more recent data set to better reflect current trends, and instead of comparing several classifiers for their accuracy, we will focus more on providing meaningful insights to users through the dynamic integration of the charts.

The method espoused by Raunak Roy uses the collected feedback in applying the analytic hierarchy process and entropy weight method to evaluate the data analysis and prediction model (Roy 2021). This method decomposes the decision-making problem into different hierarchical structures according to the order of general objectives, sub objectives at all levels, evaluation criteria and specific standby choice. Then, the problem is reduced to the determination of the relatively important weight of the lowest level, such as schemes and measures for decision-making, relative to the highest level - the overall goal or the arrangement of the relative advantages and disadvantages, so as to judge whether the prediction scheme we provide can meet the needs of users on whether to apply for H1-B visa.

### 3 PROPOSED METHOD

In order to show comprehensive aspects of H1-B statistics to potential users, we propose a set of interactive visualizations, employing multiple widely used D3.js charts implemented in Vue and Flask. The data is publicly available, and all the tools are open source and can be deployed from a consumer-grade computer. As such, this project requires no special funding.

We retrieve H1-B application data from years 2017 to 2021 from the US Department of Labor. All records from these five years in their original XLS format totaled over 1.5Gb. By accessing data directly from its original source, we can guarantee our data will have the highest possible integrity for more accurate evaluation and predictions. There are some inconsistencies in the naming and ordering of columns from year to year, as well as the addition of columns that are not pertinent to our analysis. We use OpenRefine to clean and standardize the data, dropping columns that are not pertinent to our analysis, thus making the file sizes manageable before consolidating into CSV files aggregated by year.

Users will select the attributes they are interested in on our portal page. Their request will be passed to our backend REST API, implemented by Python Flask. The API will then send the corresponding statistics back to the front-end interface. The user interface will then process the data and render the chart on the newly-directed page, where the user can view and interact with the chart using their cursor. The front-end application, based on Vue and D3.js, will have an interactive interface to provide the user rich

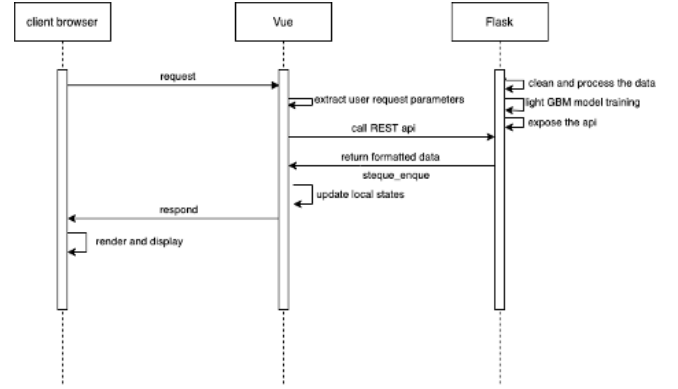


Figure 1: App Process Flow

choices of viewing, comparing, selecting and searching by certain fields.

As mentioned in Related Work, other implementations exist on the Web. Our implementation is distinct from these earlier implementations by including several innovations or improvements. Our system provides users with more selections and chart types that are more relevant to the user, such as a US choropleth with state-by-state comparison. We provide more relevant details with the ability to combine search parameters such as state and salary. We also introduce H1-B application outcome prediction through machine learning methods, a feature we have yet to find on any frequently accessed website. A list of innovations and improvements is listed in Appendix B.

We also construct a model that can predict the probability that a given application will be certified by the DOL. As mentioned above, the data requires minimal cleansing and feature engineering, dropping some unimportant features by the results of correlation and manual selection. We split the data 70%-30% for training and testing. We define our task as a binary classification, setting the “Certified” status as 1 and all other non-certified statuses as 0 to train our model. For the model, we choose a gradient boosting decision tree model named LightGBM because the data is nonlinear as we believe that this tree model shows improved performance over some of the commonly applied linear models. We cross-validate the data with 10 folds.

### 4 EXPERIMENTS AND EVALUATION

We have followed the original work distribution, which is distributed evenly among all 5 team members, with each member responsible for one component as well as making limited contributions to other components (see Appendix A).

As mentioned in our proposal, moving forward, we will implement the multiple criteria filters for the choropleth, line and bar charts for single criteria comparisons.

#### 4.1 Data Preprocessing and Feature Selection

The raw data from US Department of Labor, organized by fiscal quarter, included as many as 30 attributes depending on the reporting year, making the data files quite cumbersome to manage. As

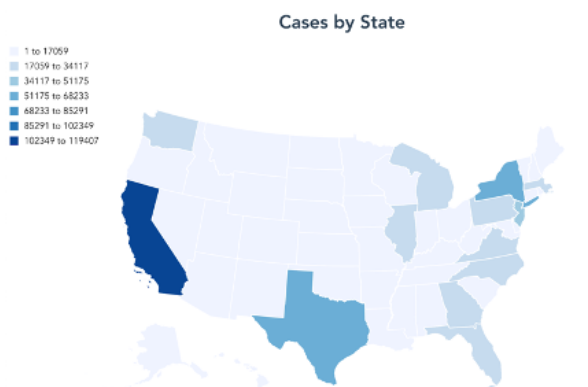


Figure 2: Choropleth

several of our members are familiar with the H1-B application process, we were able to complete an initial manual feature selection with the assistance of the official US DOL documentation using OpenRefine, removing several attributes clearly irrelevant to our study. We retained the following attributes for our analysis:

- **Case number:** Unique identifier for each application record.
- **Case status:** Result of petition, ie. Certified, Withdrawn, Denied.
- **SOC name:** Official occupation title as defined by US Bureau of Labor Statistics, ie. Software Developer, Computer Systems Analyst.
- **Full time position:** Whether the position is full-time.
- **Worksite state:** State of primary location of employment, ie. CA, NY, TX.
- **Employer name:** Name of petitioning employer, ie. Amazon, Deloitte.
- **Wage rate of pay - From:** Minimum prevailing annual salary for the position. ie. \$85,000.
- **Wage - unit of pay:** Our analysis concentrates on USD paying occupations.

A test run with the data using several gradient boosted decision tree learners, mentioned in more detail below, achieved an F1 score of 98% on both testing and training data; therefore, we retained the exact attributes from our manual selection.

We apply regular expressions to remove superfluous characters from the records, such as commas and dollar signs from some of the wage entries, as well as correct input errors and standardize capitalization of Case Status entries, and standardized Worksite State to display the full name of their respective states.

We discovered several outliers with wages that are far beyond the typical range. We set an accepted wage ceiling at \$350,000 to mitigate any potential skewing of results by these outliers.

## 4.2 Prediction Algorithm

Based on existing literature, boosted decision tree has generally proven the most accurate with historical application data due to its non-linearity. We investigated several open-source gradient boosted frameworks, including XGBoost, Yandex's CatBoost, and

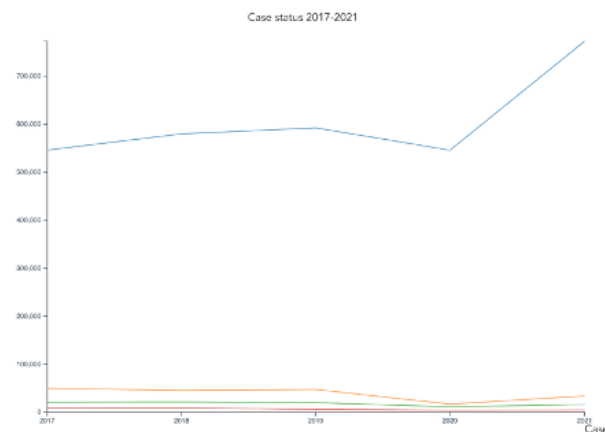


Figure 3: Line chart

Microsoft's LightGBM. We tested all three frameworks on all 5 years of data with a 30%-70% training split and 10-fold cross validation. While all provided very high accuracy and an F1 score of 97%, our choice of LightGBM ran 20% faster than the others.

[figure showing accuracy and speed of different frameworks]

## 4.3 Integration

We integrated all data, the prediction model, and visualizations within a single web application built on the Flask framework, with a responsive interface using Vue.

Although the overall volume of our data is quite large at roughly 450 MB, each individual record size is trivial after feature selection; thus, we were able to handle the processing and querying of these records through Pandas data frames, bypassing the need for a database.

## 4.4 Analysis

The choropleth shows the greatest concentrations of applications in California, Texas, and New York respectively, and are unchanged for each year. We have also produced a line chart showing the change in application decisions by year, and a bar chart showing the total amount of applications by year.

## 5 CONCLUSION

During the first phase of this project, we have successfully applied the skills and leveraged the tools touched upon in class to devise a novel solution for a real need among international students. In an effort to quickly become proficient in this domain, we have also studied the intricacies of the US work visa application process, familiarizing ourselves with the geography and industry makeup of the United States.

We are on schedule to complete our experiment and have a working application by our mid April deadline, at which time we look forward to testing its efficacy with a student survey.

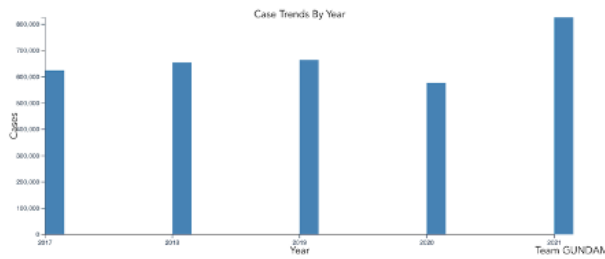


Figure 4: Bar chart

## A WORK DISTRIBUTION

- Project coordinator: Tianshu
- Data collection, cleansing, standardization, feature selection: Alexander, Tianyu
- ML algorithm design: Chuanqi
- UI and visualization design, frontend implementation: Tianshu
- Database design, backend implementation: Tianyu
- Documentation: Alexander, Qinrui, Chuanqi, Tianshu, Tianyu

All team members have contributed similar amount of effort and results to this project.

## B INNOVATIONS

- More selections and chart types that are more relevant to the user, such as a US choropleth with state-by-state comparison
- Ability to combine search parameters such as state and salary
- Interactive H1-B application outcome prediction through machine learning

## REFERENCES

- [1] Peri, G., Shih, K. Y., & Sparber, C. (2014). Foreign STEM workers and native wages and employment in US cities (No. w20093). *National Bureau of Economic Research*. [https://www.nber.org/system/files/working\\_papers/w20093/w20093.pdf](https://www.nber.org/system/files/working_papers/w20093/w20093.pdf).
- [2] Butler, E. W. (2012). The H-1B visa immigration program: Analysis and comments. *International Journal of Business and Social Science*, 3(9). <https://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.1066.7924&rep=rep1&type=pdf>.
- [3] Hermansen, A. S. (2022). Visualizing Intergenerational Immigrant Assimilation at Work. *Socius*, 8, 23780231211072590. <https://journals.sagepub.com/doi/full/10.1177/23780231211072590>.
- [4] Grimm, A. (2019). Studying to stay: Understanding graduate visa policy content and context in the United States and Australia. *International Migration*, 57(5), 235-251. <https://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=9664747>.
- [5] H-1B Program. *United States Department of Labor*. (2022). Retrieved 1 April 2022. <https://www.dol.gov/agencies/whd/immigration/h1b>.
- [6] Chatterjee, P., Velpuru, M. S., & Jagadeeswari, T. (2021). Success of H1-B VISA Using ANN. *In Machine Learning and Information Processing (pp. 491-499)*. Springer, Singapore.
- [7] Thakur, P., Singh, M., Singh, H., & Rana, P. S. (2018). An allotment of H1B work VISA in USA using machine learning. *International Journal of Engineering & Technology*, 7(2.27), 93-103. [https://www.researchgate.net/profile/Prashant-Rana-4/publication/328488339\\_An\\_allotment\\_of\\_H1B\\_work\\_visa\\_in\\_USA\\_using\\_machine\\_learning](https://www.researchgate.net/profile/Prashant-Rana-4/publication/328488339_An_allotment_of_H1B_work_visa_in_USA_using_machine_learning).
- [8] Dombe, A., Rewale, R., & Swain, D. (2020). A deep learning-based approach for predicting the outcome of H-1B VISA application. *In Machine Learning and Information Processing (pp. 193-202)*. Springer, Singapore.
- [9] Visa Tracker - 1Point3Acres. (2022). Retrieved 1 April 2022. <https://visa.1point3acres.com/>.
- [10] H1B Database 2022 - Sponsors, Salaries, Approvals, Grades!. (2022). Retrieved 1 April 2022.

- <https://h1bgrader.com/>.
- [11] Tandon, A. (2021). ANALYSIS OF IMMIGRATION TRENDS IN THE US TO DISCOVER PATTERNS AND MAKE BETTER POLICY DECISIONS. <https://scholarworks.lib.csusb.edu/cgi/viewcontent.cgi?article=2387>.
- [12] Tableau. Retrieved 1 April 2022. <https://tableau.com>.
- [13] CHAVDA, J. (2019). Big Data analysis on H-1B Visa Application in the United States. [https://www.researchgate.net/profile/Jyoti-Chavda/publication/341132236\\_Big\\_Data\\_analysis\\_on\\_H-1B\\_Visa\\_Application\\_in\\_the\\_United\\_State/](https://www.researchgate.net/profile/Jyoti-Chavda/publication/341132236_Big_Data_analysis_on_H-1B_Visa_Application_in_the_United_State/).
- [14] Sundararaman, D., Pal, N., & Misra, A. K. (2017). An analysis of nonimmigrant work VISAs in the USA using machine learning. *Int. J. Comput. Sci. Secur.(IJCSS)*, 6. <https://dhanasekar-s.github.io/research/3paper.pdf>.
- [15] Swain, D., Chakraborty, K., Dombe, A., Ashture, A., & Valakunde, N. (2018, December). Prediction of H1B Visa Using Machine Learning Algorithms. *In 2018 International Conference on Advanced Computation and Telecommunication (ICACAT) (pp. 1-7)*. IEEE.
- [16] Jethwani, G., Sachdeva, A., & Goswami, M. (2019). An Empirical Analysis of ML Algorithms. *Proceedings of International Conference on Sustainable Computing in Science, Technology and Management (SUSCOM)*, Amity University Rajasthan, Jaipur-India.
- [17] Chadha, A. S., & Shitole, A. (2021, November). A Hybrid Machine Learning Model Approach to H-1B Visa. *2021 3rd International Conference on Electrical, Control and Instrumentation Engineering (ICECIE) (pp. 1-8)*. IEEE. [https://www.researchgate.net/publication/357663888\\_A\\_Hybrid\\_Machine\\_Learning\\_Model\\_Approach\\_to\\_H-1B\\_Visa](https://www.researchgate.net/publication/357663888_A_Hybrid_Machine_Learning_Model_Approach_to_H-1B_Visa).
- [18] Roy, R. (2021). Data Analysis of H1B Visa Applications.
- [19] D3: Data Driven Documents. Retrieved 1 April 2022. <https://d3js.org/>.
- [20] Vue. Retrieved 1 April 2022. <https://vuejs.org/>.
- [21] Flask. Retrieved 1 April 2022. <https://flask.palletsprojects.com/en/2.1.x/>.
- [22] OpenRefine. Retrieved 1 April 2022. <https://openrefine.org/>.
- [23] LightGBM. *Microsoft*. Retrieved 1 April 2022. <https://github.com/microsoft/LightGBM>.