


ANTWOORDEN HOOFDSTUK 7

Opdracht 7.1

```
INSERT INTO student
-> VALUES ("2121", "Anton", "A", "van", "Zetten", "Revestraat
44", "2121VR", "Almere", "m", "0367654321", "1995-12-02", null,
"500", "500");
Query OK, 1 row affected (0.01 sec)
```



```
mysql -u root -p
student
1, "Anton", "A", "van", "Zetten", "Revestraat 44", "2121VR", "Almere", "m", "0367654321", "1995-12-02", null, "500", "500");
affected (0.01 sec)
```


Opdracht 7.2

```
INSERT INTO student
-> VALUES ("1313", "Janneke", "J","", "Simonsen", "Revestraat 2", "2222VR", "Almere",
"v", "036-5467890", "1995-4-10", null, "500", "200");
Query OK, 1 row affected (0.00 sec)
```



```
mysql -u root -p
(sec)
student
1, "Janneke", "J","", "Simonsen", "Revestraat 2", "2222VR", "Almere", "v", "036-5467890", "1995-4-10", null, "500", "200");
affected (0.00 sec)
```

```
INSERT INTO student
-> VALUES ("3232", "Annemieke", "A", "de", "Groot", "Janstraat 33", "1533JJ",
"Zeewolde", "v", "036-8912765", "1995-10-03", null, "500", "500");
Query OK, 1 row affected (0.00 sec)
```



```
mysql -u root -p
Column count doesn't match value count at row 1
student
2, "Annemieke", "A", "de", "Groot", "Janstraat 33", "1533JJ", "Zeewolde", "v", "036-8912765", "1995-10-03", null, "500", "500");
affected (0.00 sec)
it
```

OPDRACHT 7.3


UPDATE student

-> SET adres = 'Lotstraat 5', postcode = '4455 BT'

-> WHERE studentnr = '4444';

Query OK, 1 row affected (0.00 sec)

Rows matched: 1 Changed: 1 Warnings: 0

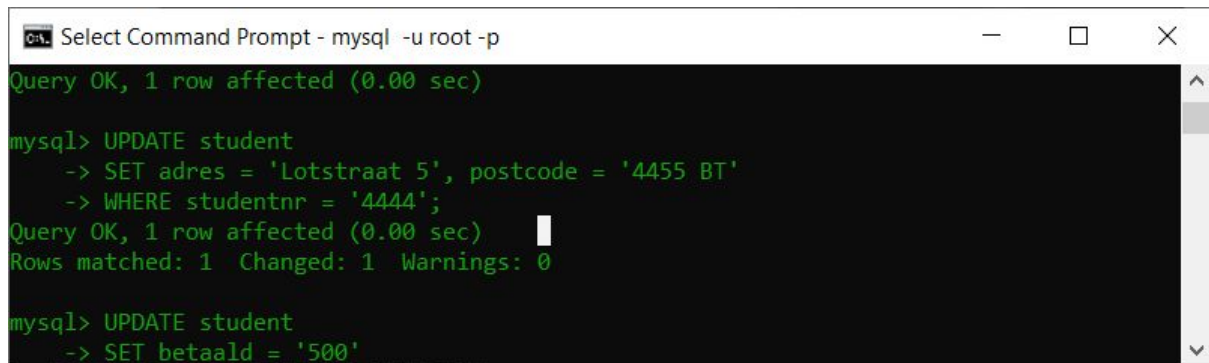

```
Select Command Prompt - mysql -u root -p
Query OK, 1 row affected (0.00 sec)

mysql> UPDATE student
  -> SET adres = 'Lotstraat 5', postcode = '4455 BT'
  -> WHERE studentnr = '4444';
Query OK, 1 row affected (0.00 sec)
Rows matched: 1 Changed: 1 Warnings: 0

mysql> UPDATE student
  -> SET betaald = '500'
```

OPDRACHT 7.4


UPDATE student

-> SET betaald = '500'

-> WHERE studentnr = '5555';

Query OK, 1 row affected (0.00 sec)

Rows matched: 1 Changed: 1 Warnings: 0

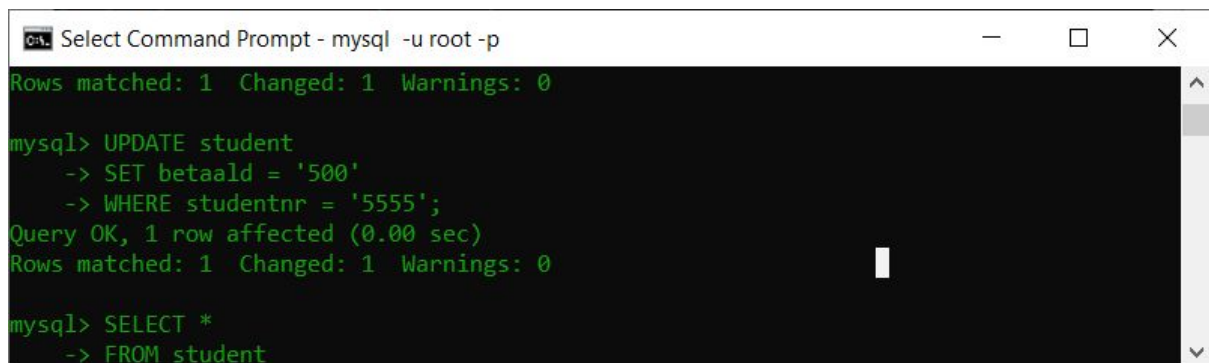

```
Select Command Prompt - mysql -u root -p
Rows matched: 1 Changed: 1 Warnings: 0

mysql> UPDATE student
  -> SET betaald = '500'
  -> WHERE studentnr = '5555';
Query OK, 1 row affected (0.00 sec)
Rows matched: 1 Changed: 1 Warnings: 0


mysql> SELECT *
  -> FROM student
```

opdracht 7.5

> UPDATE student

-> SET adres = 'Januaristraat 15' , postcode = '1335RT', woonplaats = 'Almere'

-> WHERE studentnr = '3232';

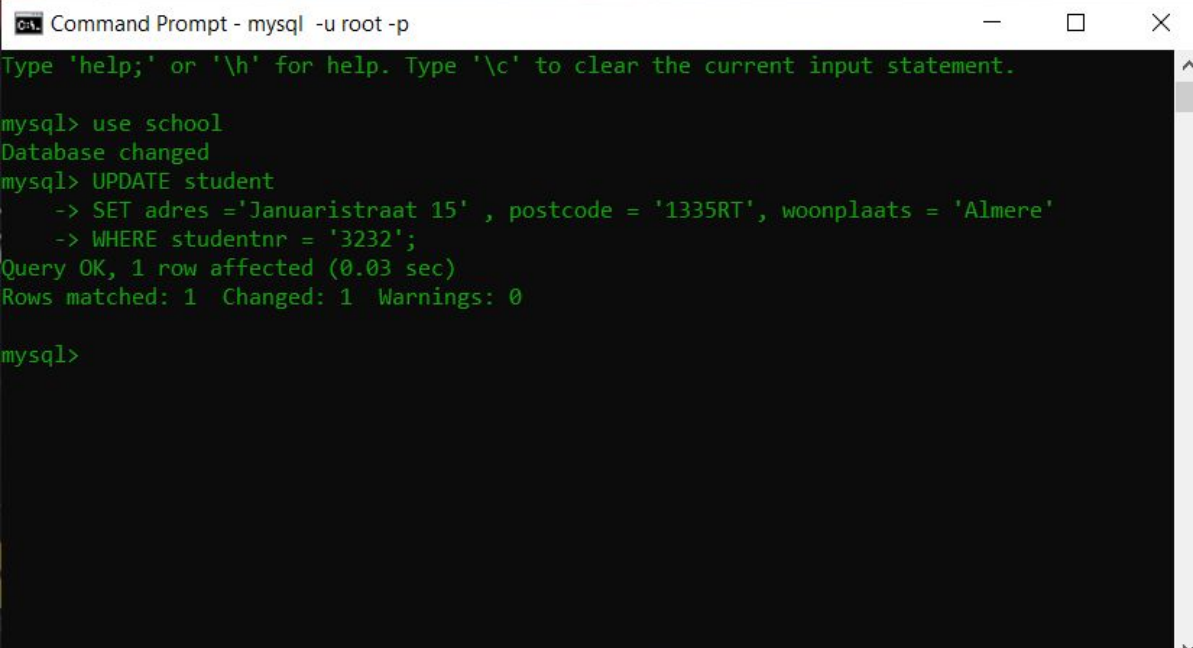

```
Command Prompt - mysql -u root -p
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> use school
Database changed
mysql> UPDATE student
  -> SET adres = 'Januaristraat 15' , postcode = '1335RT', woonplaats = 'Almere'
  -> WHERE studentnr = '3232';
Query OK, 1 row affected (0.03 sec)
Rows matched: 1  Changed: 1  Warnings: 0


mysql>
```

opdracht 7.6

SELECT schoolgeld - betaald

-> FROM student

-> WHERE studentnr = '4444';

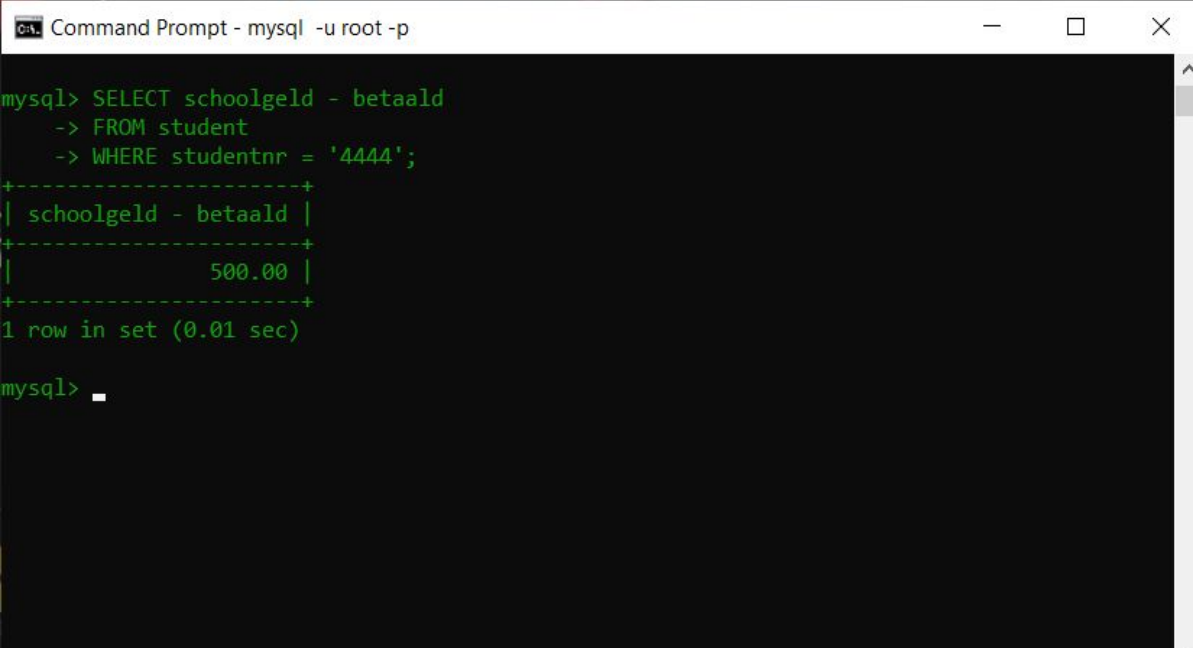


```
Command Prompt - mysql -u root -p

mysql> SELECT schoolgeld - betaald
  -> FROM student
  -> WHERE studentnr = '4444';
+-----+
| schoolgeld - betaald |
+-----+
|          500.00      |
+-----+
1 row in set (0.01 sec)

mysql> 
```

opdracht 7.7

```
SELECT COUNT(uitgeschreven)
-> FROM student
-> ;
```

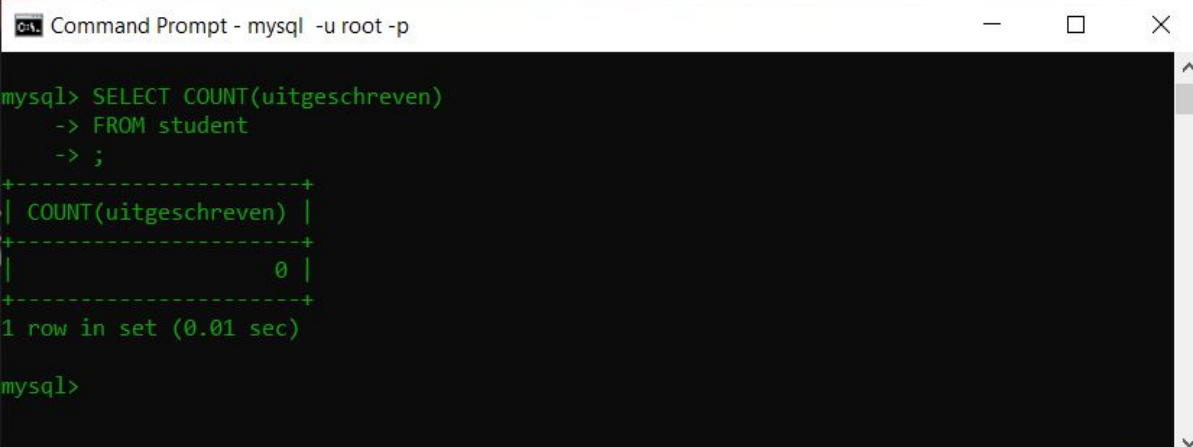


Command Prompt - mysql -u root -p

```
mysql> SELECT COUNT(uitgeschreven)
-> FROM student
-> ;
+-----+
| COUNT(uitgeschreven) |
+-----+
| 0 |
+-----+
1 row in set (0.01 sec)

mysql>
```

opdracht 7.8

```
SELECT COUNT(uitgeschreven)
-> FROM student;
```

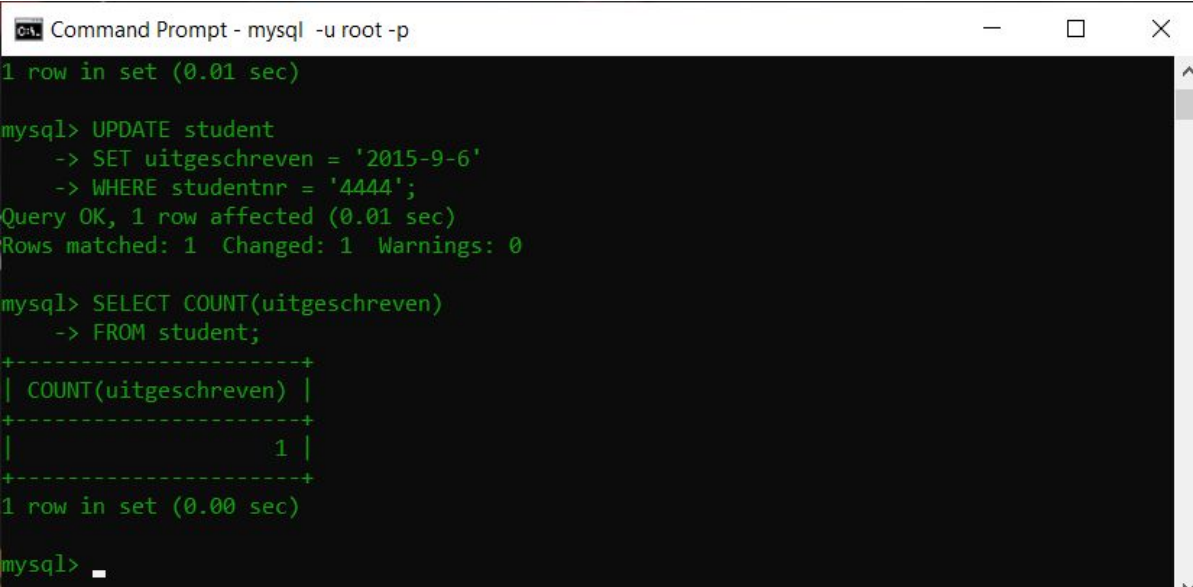

Command Prompt - mysql -u root -p

```
1 row in set (0.01 sec)

mysql> UPDATE student
-> SET uitgeschreven = '2015-9-6'
-> WHERE studentnr = '4444';
Query OK, 1 row affected (0.01 sec)
Rows matched: 1 Changed: 1 Warnings: 0

mysql> SELECT COUNT(uitgeschreven)
-> FROM student;
+-----+
| COUNT(uitgeschreven) |
+-----+
| 1 |
+-----+
1 row in set (0.00 sec)


mysql> _
```

opdracht 7.9

UPDATE student

-> SET uitgeschreven = '2020-3-23'

-> WHERE studentnr = '2222';

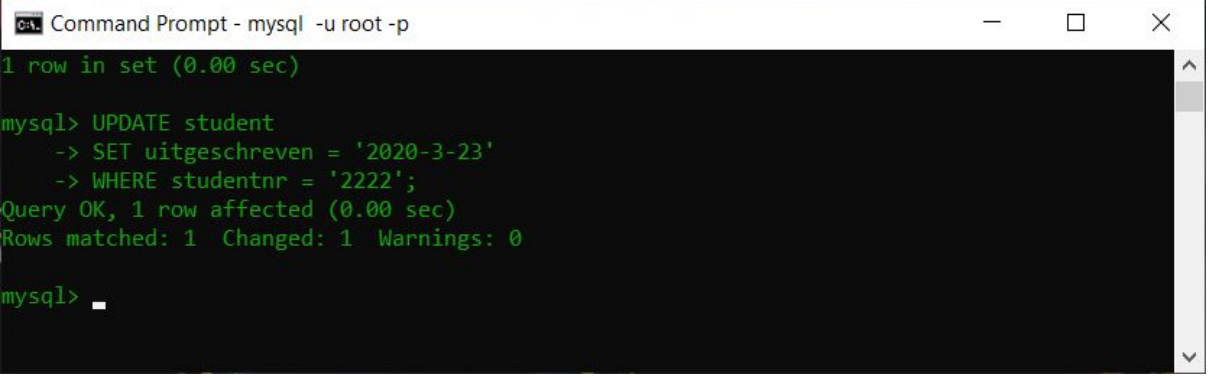

```
Command Prompt - mysql -u root -p

1 row in set (0.00 sec)


mysql> UPDATE student
      -> SET uitgeschreven = '2020-3-23'
      -> WHERE studentnr = '2222';
Query OK, 1 row affected (0.00 sec)
Rows matched: 1  Changed: 1  Warnings: 0

mysql> _
```

Opdracht 7.10

SELECT COUNT(uitgeschreven)

-> FROM student;

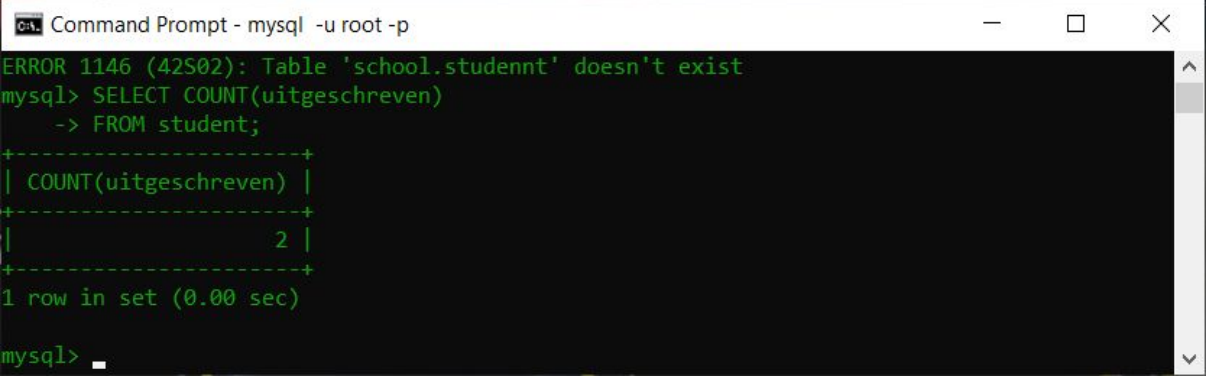

```
Command Prompt - mysql -u root -p

ERROR 1146 (42S02): Table 'school.studennt' doesn't exist
mysql> SELECT COUNT(uitgeschreven)
      -> FROM student;
+-----+
| COUNT(uitgeschreven) |
+-----+
|                2    |
+-----+
1 row in set (0.00 sec)

mysql> _
```