INKALUM

# CATALOG

## PT. INKASA JAYA ALUMINIUM



EDISI 2022



## PROFILE

We would like to take this opportunity to introduce ourselves as one of the aluminium extrusion manufacturer in Indonesia.

PT. INKASA JAYA ALUMINIUM was established in Nov 2013

PT. INKASA JAYA ALUMINIUM is 100% an Indonesian owened company

PT. INKASA JAYA ALUMINIUM plant has the following state of the art facilities and services :

- 20 unit latest aluminium extrusion presses
- 3 unit of smelting furnaces
- Anodizing and powder coating finished facilities
- In house die designers,technicians and engineers and also die makers

With our set-up, we are able to offer all customers with a one stop services to meet their industry standards requirement such as building construction marine, ship building, aerospace, automobile, precisions engineering, electronics, medical equipments, machineries and etc.

Recently, we set up our Pasuruan, East Java, Indonesia head office, **PT. INKASA JAYA ALUMINIUM** to focus our business strategy **"Providing One Stop Solution"** to better serve all our customers requirements in this region.

INKALUM


**WEBSITE**
www.inkalum.com
**INSTAGRAM**
pt.inkasajayaaluminium
**FACEBOOK**
Inkasa Jaya Alumunium
**E-MAIL**
marketing@inkalum.com
marketing_inkasa@yahoo.com
marketing@inkasaaluminium.com



## GENERAL INFORMATION

A unique combination of properties puts aluminium and its alloys among our most flexible engineering and construction materials, which delivers high performance in functional services. The advantages of aluminum extrusion can be selected and mixed almost without limit to suit the needs and preferences of customers in a single material and process. Described below are major advantages that make aluminum extrusion such flexible and favorable products.

**Aluminium Major Advantages :**

- All alloys are light in weight, yet some have strengths greater than of that of structural steel. Thus the lightweight may reduce the cost of handling and product shipping whatever the applications.
- Aluminium requires no protective coating for most applications; the surface supplied is entirely adequates without futher finishing. Where the plain aluminium surface does not suffice, a wide variety of surface finishes are available to suit, such as: chemical, electrochemical, and paint finishes.
- Aluminium and most of its alloys have good electrical and thermal conductivity and high reflectivity to both heat and light. Although it is an excellent electrical conductor, aluminium does not produce sparks, which is an essential property for products used highly flammable or explosive materials and atmosphere.
- Aluminium has a high resistance to corrosion because on surface exposed to the atmosphere and other environmental, factors a thin transparent oxide skins burn immediately and protects the metal from futher oxidation. The metal can safety be used in the presence of certain mild alkalis with the aid of inhibitors, but general direct contact with alkaline substances should be avoided as these attack the oxide skin and are therefore corrosive to aluminium.
- Aluminium is often the most economical choice for electrical system components because its electrical conductivity (alloy 1350) is approximately 36MS/m (62% of IACS).
- The aluminium industry includes a large and active “secondary metal” sector which accept scrapped aluminium products for remilting and recovery of the metal. Aluminium extrusion have substantial scrap value and can be recycled. That’s an advantage that may appeal both to a potential buyer and to his concern for environmental protection.
- Aluminium and most of its alloys can easily be worked into any form and readily accept a wide variety of surface finishes. Aluminum is a popular choice of material for complex sectioned. Often, it can compete successfully with cheaper materials having a lower degree of workability. In fact most aluminium alloys can be machined speedly and easily and important factor contributing to the low cost or finished aluminium parts. There is almost no limit to the different shapes in which the aluminium may be extruded.

INKALUM

**WEBSITE**
www.inkalum.com
**INSTAGRAM**
pt.inkasajayaaluminium
**FACEBOOK**
Inkasa Jaya Alumunium
**E-MAIL**
marketing@inkalum.com
marketing_inkasa@yahoo.com
marketing@inkasaaluminium.com



**Finishes for Aluminium Extruded Products:**

- **Mill Finish**

  Natural aluminium finish of the extrusion press no futher anodizing or coloring process.

- **Natural Anodizing**

  By means of eletro-chemical process natural oxide-film will be formed and thickened considerably on the metal surface. The aluminium extrusion is then sealed in hot deionized-water which closes of the pores and permanently seals the oxide film imparting to the metal surface the extreme hardness, corrosion and wear resistance of the oxide. INKASA Natural Anodize finish conform to International Standard and is available in nominal film thickness 5, 10, 18 and 25 microns.

  For normal and severe atmosphere condition, film thickness from 10 to 25 microns repectively should be recommended.

- **Color Finish**

  In the INKASA color process, inorganic metal color particles are deposited and fixed electronically at the very base of the pores of anodic film allowing virtually full thickness of the anodic film to protect them.

  The aluminium extrusion is then sealed in hot deionozed water which closes of pores and permanently seals in the color particles.

  The coloring process in combination with anodizing is to yield a finish which is light fast, abrasion and corrosion resistance and unchanging color intensity. For normal and severe atmosphere condition, film thickness from 10 to 25 microns respectively should be recommended.

INKALUM


**WEBSITE**
www.inkalum.com
**INSTAGRAM**
pt.inkasajayaaluminium
**FACEBOOK**
Inkasa Jaya Alumunium
**E-MAIL**
marketing@inkalum.com
marketing_inkasa@yahoo.com
marketing@inkasaaluminium.com



## ALLOY 6063

### Description of Alloy

Alloy 6063 provides a good combination of extrudability and mechanical properties. Its excellent extrudability allows thin-walled hollow shapes, intricate solids, and other that are usually difficult to extrude with satisfactory finish, to be produced more easily. It respons well to polishing, chemical brightening, anodizing and dyeing.

### Characteristics

| | |
|---|---|
| Welding | Alloy 6063 is readily welded by the MIG and TIG processes |
| Machining | Readily machined in all tempers givens |
| Forming | All tempers maybe in formed the softer tempers accepting more severe forming |
| Corrosion | Excellent resistance to the atmosphere. Particulary suitable for anodizing for architectural applications |

### Tempers Available

Extruded shapes – F, T4, T5 and T6

### Physical Properties

| | |
|---|---|
| Density | 2.71 x 10-6 kg/mm3 |
| Melting Range | 600-650˚C |
| Specific Heat between 0-100˚C | 879 J/kg deg C |
| Coefficient of Linear Expansion between 20-200˚C | 23x10-6 deg C |
| Thermal Conductivity at 100˚C | 201 W/m deg C |
| Electrical Resistively at 20˚C | 0.033µAm |
| Modulus of Elasticity | 69x10ɜ MPa |

INKALUM


**WEBSITE**
www.inkalum.com
**INSTAGRAM**
pt.inkasajayaaluminium
**FACEBOOK**
Inkasa Jaya Alumunium
**E-MAIL**
marketing@inkalum.com
marketing_inkasa@yahoo.com
marketing@inkasaaluminium.com



## CHEMICAL COMPOSITION

| Alloy | Si(%) | Fe(%) | Cu(%) | Mn(%) | Mg(%) | Cr(%) | Zn(%) | Ti(%) | Others(%) | AI(%) |
|---|---|---|---|---|---|---|---|---|---|---|
| 6061 | 0.4◦-0.8 | 0.70 | 0.15-0.4 | 0.15 | 0.80-1.2 | 0.40-0.35 | 0.25 | 0.15 | 0.15 | Reminder |
| 6063 | 0.20-0.6 | 0.35 | 0.10 | 0.10 | 0.45-0.9 | 0.10 | 0.10 | 0.10 | 0.15 | Reminder |
| 6106 | 0.30-0.6 | 0.35 | 0.25 | 0.10 | 0.40-0.80 | 0.20 | 0.10 | 0.00 | 0.10 | Reminder |

Note : Composition in percent maximum unless shown as a range.

## MECHANICAL PROPERTIES

| Alloy | Temper | Minimum Yield Strenght (MPa) | Minimum Ultimate Tensile Strength (MPa) | Elongation's in 50mm apply for thickness up throught 12.50mm in 5D (5.65VA) |
|---|---|---|---|---|
| 6061 | T4 | 115 | 190 | 14% |
| | T6 | 240 | 280 | 7% |
| 6063 | F | - | 100 | 12% |
| | T4 | 70 | 130 | 14% |
| | T5 | 110 | 150 | 7% |


INKALUM


**WEBSITE**
www.inkalum.com
**INSTAGRAM**
pt.inkasajayaaluminium
**FACEBOOK**
Inkasa Jaya Alumunium
**E-MAIL**
marketing@inkalum.com
marketing_inkasa@yahoo.com
marketing@inkasaaluminium.com

# CONTENTS


I.BARS
1.FLAT BARS HAL. 02 - 03
2.SQUARE BARS HAL. 04
3.ROUND BARS HAL. 05 - 06
4.HEXAGON HAL. 07
II.ANGLES
1.EQUAL ANGLES HAL. 08 - 09
2.UNEQUAL ANGLES HAL. 10 - 11
III.CHANNELS
1.EQUAL CHANNELS HAL. 12
2.UNEQUAL CHANNELS HAL. 13
IV.HOLLOWS
1.SQUARE HOLLOWS HAL. 14 - 19
2.RECTANGULAR HOLLOWS HAL. 20 - 24
3.ROUND TUBE HAL. 25 - 34
V.SPANDRELS HAL. 35 - 39
VI.SHOP FRONT
1.SHOP FRONT 3" X 1.5" HAL. 40 - 43
2.SHOP FRONT 4" X 1.75" HAL. 44 - 47
VII.DOOR
1.SWING DOORS HAL. 48 - 56
2.SLIDING DOORS HAL. 57 - 60
3.ROLLING DOORS HAL. 61 - 68
4.DOOR JAMB HAL. 69
VIII.CURTAIN RAILS HAL. 70
IX.WINDOWS
1.CASEMENT WINDOWS HAL. 71 - 74
2.WINDOW WALLS HAL. 74 - 77
3.SLIDING WINDOWS HAL. 78 - 79
X.CURTAIN WALLS HAL. 80 - 86
XI.TRANSPORT HAL. 87
XII.LOUVERS HAL. 88
XIII.SHOW CASES HAL. 89 - 105
XIV.TRIMINGS HAL. 106 - 109
XV.OTHERS HAL. 110 - 112
XVI.KITCHEN SET HAL. 113

FLAT BARS Group : I - 1 (1)

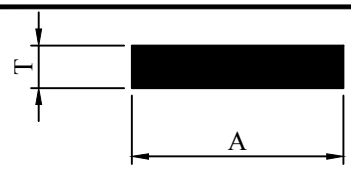



| SECTION NO | A MM | T MM | W KG/M | P MM | REMARK |
|---|---|---|---|---|---|
| 1302 | 10,00 | 4,00 | 0.108 | 28.00 | - |
| 1303 | 12.70 | 0.80 | 0.028 | 27.00 | - |
| 1305 | 16.00 | 3.00 | 0.130 | 38.00 | - |
| 1306 | 18.90 | 3.00 | 0.154 | 43.80 | - |
| 1307 | 19.00 | 0.90 | 0.046 | 39.80 | - |
| 1307A | 19.00 | 8.00 | 0.412 | 54.00 | - |
| 1308 | 20.00 | 3.00 | 0.163 | 46.00 | - |
| 1309 | 24.50 | 12.00 | 0.797 | 73.00 | - |
| 1310 | 25.00 | 3.00 | 0.203 | 56.00 | - |
| 1311A | 25.00 | 5.00 | 0.325 | 64.10 | STRIPE |
| 1312 | 25.00 | 6.00 | 0.407 | 62.00 | - |
| 1313 | 32.00 | 3.00 | 0.260 | 70.00 | - |
| 1314 | 32.00 | 6.00 | 0.520 | 76.00 | - |
| 0167 | 35.00 | 8.00 | 0.758 | 85.14 | - |
| 1315 | 38.10 | 6.00 | 0.620 | 88.20 | - |
| 1316 | 40.00 | 3.00 | 0.325 | 86.00 | - |
| 1317 | 40.00 | 5.00 | 0.542 | 90.00 | - |
| 1318 | 40.00 | 6.00 | 0.650 | 92.00 | - |
| 1319 | 44.50 | 4.00 | 0.473 | 93.57 | FULL RADIUS |
| 1320 | 42.60 | 4.00 | 0.462 | 93.37 | CENTER LINE |
| 1321 | 50.00 | 3.00 | 0.407 | 106.00 | - |
| 1322 | 50.00 | 5.00 | 0.678 | 110.00 | - |
| 1323 | 50.00 | 6.00 | 0.813 | 112.00 | - |
| 1324 | 50.00 | 8.00 | 1.084 | 116.00 | - |
| 1325 | 50.00 | 9.00 | 1.220 | 118.00 | - |
| 1326 | 50.00 | 10.00 | 1.355 | 120.00 | - |
| 1327 | 50.80 | 4.00 | 0.541 | 106.17 | - |

FLAT BARS Group : I - 1 (2)





| SECTION NO | A MM | T MM | W KG/M | P MM | REMARK |
|---|---|---|---|---|---|
| 1328 | 50.80 | 6.35 | 0.874 | 114.30 | - |
| 1329 | 51.00 | 9.00 | 1.244 | 120.00 | - |
| 1330 | 55.00 | 5.15 | 0.768 | 120.30 | - |
| 1331 | 60.00 | 1.90 | 0.309 | 123.80 | - |
| 1332 | 70.00 | 2.00 | 0.379 | 144.00 | - |
| 1333 | 74.00 | 2.10 | 0.421 | 152.20 | - |
| 0157 | 75.00 | 8.00 | 1.625 | 165.14 | - |
| 1334 | 80.00 | 1.00 | 0.217 | 162.00 | - |
| 1335 | 80.00 | 3.00 | 0.650 | 166.00 | - |
| 1336 | 80.00 | 6.00 | 1.301 | 172.00 | - |
| 1337 | 80.00 | 10.00 | 2.168 | 180.00 | - |
| 1338 | 80.00 | 16.00 | 3.469 | 192.00 | - |
| 1339 | 90.00 | 2.00 | 0.488 | 184.00 | - |
| 1340 | 94.00 | 23.00 | 5.859 | 234.00 | - |
| 1341 | 98.00 | 32.00 | 8.499 | 260.00 | - |
| 1342 | 98.00 | 40.00 | 10.623 | 276.00 | - |
| 1343 | 98.00 | 42.00 | 11.154 | 280.00 | - |
| 1344 | 100.00 | 6.00 | 1.626 | 212.00 | - |
| 1345 | 100.00 | 10.00 | 2.710 | 219.14 | RADIUS 0.50 |
| 1346 | 100.00 | 12.00 | 3.252 | 224.00 | - |
| 1347 | 100.00 | 16.00 | 4.336 | 232.00 | - |
| 1348 | 100.00 | 20.00 | 5.420 | 240.00 | - |
| 1349 | 100.00 | 25.00 | 6.775 | 250.00 | - |
| 1350 | 101.60 | 9.00 | 2.480 | 221.20 | - |
| 1351 | 150.00 | 6.00 | 2.439 | 312.00 | - |
| 1354 | 150.00 | 10.00 | 4.065 | 320.00 | - |
| 1352 | 150.00 | 20.00 | 8.130 | 340.00 | - |
| 1353 | 160.00 | 10.00 | 4.336 | 340.00 | - |


## SQUARE BARS Group I - 2 (1)

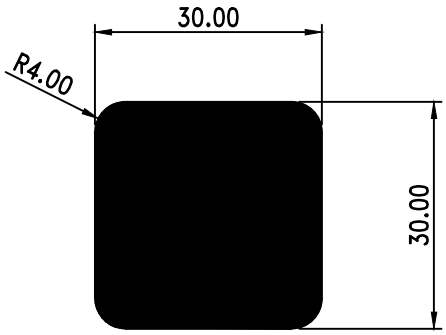



SECTION NO:2571BR
W=2.402 KG/M
P=113.13 MM




SECTION NO:2509BR
W=0.626 KG/M
P=60.80 MM





SECTION NO:0101
W=0.271 KG/M
P=40.00 MM

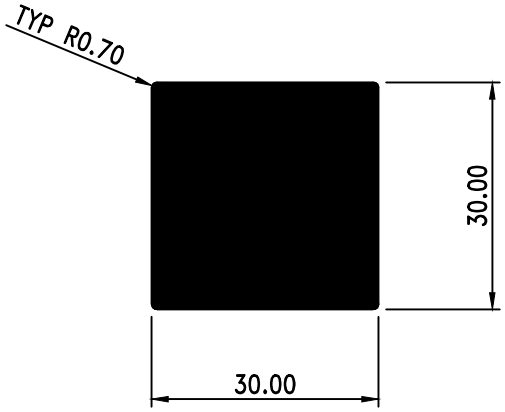



SECTION NO:1371
W=2.438KG/M
P=118.80 MM

ROUND BARS Group I - 3 (1)





| SECTION NO | A MM | T MM | W KG/M | P MM | REMARK |
|---|---|---|---|---|---|
| 2701 | 4.76 | - | 0.048 | 14.954 | - |
| 2702 | 5.50 | - | 0.064 | 17.28 | - |
| 2703 | 6.00 | - | 0.077 | 18.85 | - |
| 2704 | 6.20 | - | 0.082 | 19.48 | - |
| 2705 | 7.00 | - | 0.104 | 21.99 | - |
| 2706 | 7.80 | - | 0.129 | 24.50 | - |
| 2737 | 8.00 | - | 0.136 | 25.13 | - |
| 2707 | 8.20 | - | 0.143 | 25.76 | - |
| 2708 | 8.50 | - | 0.154 | 26.70 | - |
| 2710 | 9.00 | - | 0.172 | 28.27 | - |
| 2711 | 9.50 | - | 0.192 | 29.85 | - |
| 2712 | 10.00 | - | 0.213 | 31.42 | - |
| 2745 | 11.00 | - | 0.258 | 34.56 | - |
| 2746 | 11.50 | - | 0.281 | 36.13 | - |
| 2747 | 12.00 | - | 0.307 | 37.70 | - |
| 2716 | 12.70 | - | 0.343 | 39.90 | - |
| 2717 | 14.10 | - | 0.423 | 44.30 | - |
| 2718 | 16.00 | - | 0.545 | 50.27 | - |
| 2738 | 16.50 | - | 0.579 | 51.84 | - |
| 2719 | 18.10 | - | 0.697 | 56.86 | - |
| 2720 | 19.05 | - | 0.772 | 59.85 | - |
| 2721 | 19.20 | - | 0.785 | 60.32 | - |
| 2739 | 19.50 | - | 0.809 | 61.26 | - |
| 2722 | 22.00 | - | 1.030 | 69.12 | - |
| 2140 | 23.00 | - | 1.126 | 72.257 | - |

ROUND BARS Group I - 3 (2)





| SECTION NO | A MM | T MM | W KG/M | P MM | REMARK |
|---|---|---|---|---|---|
| 2723 | 25.40 | - | 1.373 | 79.80 | - |
| 2724 | 28.00 | - | 1.669 | 87.97 | - |
| 2725 | 31.75 | - | 2.146 | 99.75 | - |
| 2726 | 32.50 | - | 2.248 | 102.10 | - |
| 2727 | 41.00 | - | 3.578 | 128.81 | - |
| 2728 | 51.00 | - | 5.536 | 160.22 | - |
| 2729 | 55.00 | - | 6.438 | 172.79 | - |
| 2730 | 61.00 | - | 7.920 | 191.64 | - |
| 2709 | 85.00 | - | 15.378 | 267.04 | - |
| 2733 | 90.00 | - | 17.240 | 282.74 | - |
| 2732 | 101.00 | - | 21.712 | 317.30 | - |
| 2734 | 120.00 | - | 30.649 | 376.99 | - |
| 2735 | 127.00 | - | 34.329 | 398.98 | - |
| 2736 | 152.40 | - | 49.434 | 478.78 | - |


## HEXAGON Group I - 4 (1)





SECTION NO:4007
W=0.132 KG/M
P=25.98 MM





SECTION NO:4008
W=1.157 KG/M
P=76.90 MM





SECTION NO:4010
W=0.799 KG/M
P=66.00 MM




SECTION NO:4009
W=0.625 KG/M
P=58.89 MM





| SECTION NO | A MM | T MM | W KG/M | P MM | REMARK |
|---|---|---|---|---|---|
| 1001 | 7.00 | 0.60 | 0.022 | 27.57 | - |
| 1002 | 7.00 | 0.70 | 0.025 | 28.00 | - |
| 1003 | 8.00 | 0.70 | 0.029 | 32.00 | - |
| 1005 | 10.00 | 0.60 | 0.031 | 39.57 | - |
| 1006 | 10.00 | 0.70 | 0.037 | 40.00 | - |
| 1007 | 12.00 | 0.60 | 0.037 | 48.83 | VEE GROOVE |
| 1008 | 12.00 | 0.70 | 0.044 | 48.23 | VEE GROOVE |
| 1009 | 12.00 | 0.70 | 0.044 | 48.00 | - |
| 1053 | 12.50 | 0.80 | 0.051 | 49.74 | - |
| 1010A | 12.70 | 0.60 | 0.040 | 50.37 | - |
| 1010B | 12.70 | 0.70 | 0.047 | 50.80 | - |
| 1010 | 12.70 | 1.00 | 0.066 | 50.80 | - |
| 1012 | 13.00 | 0.60 | 0.041 | 52.00 | - |
| 1013 | 15.00 | 0.60 | 0.048 | 60.00 | - |
| 1014 | 15.00 | 0.70 | 0.056 | 60.00 | - |
| 1052 | 15.88 | 1.00 | 0.083 | 63.52 | - |
| 1016 | 16.00 | 0.60 | 0.051 | 64.00 | - |
| 1017 | 16.00 | 1.60 | 0.132 | 64.00 | - |
| 1018 | 17.00 | 0.70 | 0.063 | 68.00 | - |
| 1019A | 19.00 | 0.70 | 0.071 | 76.00 | - |
| 0102 | 19.00 | 1.20 | 0.120 | 76.00 | - |
| 1019 | 19.05 | 0.80 | 0.081 | 76.20 | - |
| 1051 | 19.05 | 1.00 | 0.101 | 76.20 | - |
| 1020 | 20.00 | 0.60 | 0.064 | 80.00 | - |
| 1022 | 20.00 | 0.65 | 0.069 | 80.00 | - |
| 1024 | 25.00 | 0.60 | 0.080 | 100.00 | - |





| SECTION NO | A MM | T MM | W KG/M | P MM | REMARK |
|---|---|---|---|---|---|
| 1023A | 25.00 | 0.70 | 0.094 | 100.00 | - |
| 0103 | 25.00 | 1.20 | 0.159 | 100.00 | - |
| 1023 | 25.00 | 1.60 | 0.210 | 100.00 | - |
| 1023B | 25.00 | 3.00 | 0.382 | 100.00 | - |
| 1025A | 25.40 | 0.60 | 0.082 | 101.17 | - |
| 1025B | 25.40 | 1.00 | 0.135 | 101.17 | - |
| 1026 | 26.00 | 0.70 | 0.097 | 104.00 | - |
| 1027A | 32.00 | 0.60 | 0.103 | 127.57 | - |
| 1027 | 32.00 | 3.00 | 0.496 | 128.00 | - |
| 1028 | 34.00 | 0.60 | 0.110 | 136.00 | - |
| 1029 | 34.00 | 0.70 | 0.128 | 136.00 | - |
| 1030 | 35.00 | 2.00 | 0.369 | 140.00 | - |
| 1031A | 38.10 | 0.60 | 0.123 | 151.97 | - |
| 1032 | 38.10 | 1.35 | 0.274 | 152.40 | - |
| 1033 | 38.10 | 1.50 | 0.304 | 152.40 | - |
| 1034 | 40.00 | 1.60 | 0.340 | 160.00 | - |
| 1036 | 40.00 | 3.00 | 0.626 | 160.00 | - |
| 1035 | 40.00 | 4.00 | 0.824 | 160.00 | - |
| 1037 | 40.00 | 6.00 | 1.203 | 160.00 | - |
| 1045 | 50.00 | 1.00 | 0.268 | 200.00 | - |
| 1038 | 50.00 | 1.20 | 0.321 | 200.00 | - |
| 1039 | 50.00 | 1.80 | 0.479 | 200.00 | - |
| 1040 | 50.00 | 3.00 | 0.789 | 200.00 | - |
| 1041 | 50.00 | 6.00 | 1.528 | 200.00 | - |
| 1042 | 55.00 | 15.00 | 3.862 | 220.00 | - |
| 1043 | 80.00 | 6.00 | 2.504 | 320.00 | - |
| 1044 | 50.00 | 10.00 | 2.439 | 200.00 | INSIDE R6 |

UNEQUAL ANGLES Group : II - 2 (1)





| SECTION NO | A MM | B MM | T MM | W KG/M | P MM | REMARK |
|---|---|---|---|---|---|---|
| 1200 | 13.00 | 6.00 | 3.00 | 0.130 | 38.00 | - |
| 1201 | 14.00 | 12.00 | 1.15 | 0.078 | 52.00 | - |
| 1201B | 14.00 | 12.00 | 1.20 | 0.080 | 50.97 | FULL RADIUS |
| 1202A | 16.00 | 14.00 | 1.50 | 0.116 | 60.00 | - |
| 1202B | 16.00 | 14.00 | 1.70 | 0.130 | 60.00 | - |
| 1216 | 18.00 | 11.00 | 1.20 | 0.090 | 58.00 | - |
| 1204 | 19.05 | 8.00 | 2.00 | 0.136 | 54.10 | - |
| 1203 | 20.00 | 8.00 | 1.15 | 0.084 | 56.00 | - |
| 1205 | 21.00 | 8.50 | 1.30 | 0.099 | 59.00 | - |
| 1206 | 21.00 | 8.70 | 1.50 | 0.115 | 59.40 | - |
| 1207 | 22.00 | 11.00 | 0.70 | 0.061 | 66.00 | - |
| 1228 | 22.50 | 13.5 | 1.70 | 0.157 | 72.99 | VEE GROOVE |
| 1208 | 23.00 | 14.00 | 1.60 | 0.154 | 74.00 | - |
| 1208A | 23.00 | 14.00 | 1.70 | 0.163 | 74.00 | - |
| 1209 | 25.00 | 9.00 | 1.70 | 0.149 | 68.00 | - |
| 1210 | 25.00 | 12.50 | 1.15 | 0.113 | 75.00 | - |
| 1210A | 25.00 | 12.50 | 1.40 | 0.137 | 74.57 | - |
| 1211 | 26.00 | 13.00 | 1.70 | 0.172 | 78.00 | - |
| 1213A | 26.00 | 13.00 | 1.40 | 0.143 | 78.00 | - |
| 1213B | 26.00 | 13.00 | 1.20 | 0.123 | 78.00 | - |
| 1224 | 26.00 | 12.50 | 1.20 | 0.121 | 77.00 | - |
| 1212B | 26.50 | 12.50 | 1.35 | 0.138 | 78.00 | - |
| 1212 | 26.50 | 13.00 | 1.30 | 0.135 | 79.00 | - |
| 1214 | 27.00 | 14.00 | 1.65 | 0.176 | 82.00 | - |
| 1215 | 27.40 | 24.80 | 1.10 | 0.152 | 104.40 | VEE GROOVE |

UNEQUAL ANGLES Group : II - 2 (2)





| SECTION NO | A MM | B MM | T MM | W KG/M | P MM | REMARK |
|---|---|---|---|---|---|---|
| 1215A | 27.40 | 24.80 | 1.20 | 0.166 | 104.40 | VEE GROOVE |
| 1217 | 27.50 | 13.75 | 1.35 | 0.146 | 82.50 | - |
| 1218 | 27.50 | 24.90 | 1.20 | 0.167 | 104.80 | VEE GROOVE |
| 1219 | 29.00 | 15.00 | 1.70 | 0.195 | 88.00 | - |
| 1219A | 29.00 | 14.00 | 1.70 | 0.190 | 86.00 | - |
| 1229 | 30.00 | 16.00 | 1.80 | 0.216 | 92.00 | - |
| 1220 | 35.00 | 20.00 | 4.00 | 0.553 | 110.00 | - |
| 1221 | 38.00 | 19.00 | 2.00 | 0.298 | 114.00 | - |
| 1222 | 40.00 | 16.60 | 1.60 | 0.238 | 113.20 | - |
| 1223 | 40.00 | 25.00 | 3.00 | 0.504 | 130.00 | - |
| 0132 | 45.00 | 35.00 | 8.00 | 1.535 | 153.56 | - |

EQUAL CHANNELS Group : III - 1 (1)





| SECTION NO | A MM | T MM | W KG/M | P MM | REMARK |
|---|---|---|---|---|---|
| 1900 | 6.30 | 0.90 | 0.042 | 36.00 | - |
| 1901 | 7.00 | 0.60 | 0.032 | 40.28 | - |
| 1934 | 7.00 | 0.70 | 0.037 | 40.60 | - |
| 1932 | 8.00 | 0.60 | 0.037 | 47.60 | STRIPE |
| 1931 | 9.00 | 0.60 | 0.042 | 52.29 | - |
| 1931A | 9.00 | 0.60 | 0.041 | 53.60 | STRIPE |
| 1931B | 9.00 | 0.80 | 0.053 | 52.45 | - |
| 1902 | 9.50 | 0.90 | 0.065 | 55.20 | - |
| 1933 | 12.00 | 0.60 | 0.056 | 71.60 | STRIPE |
| 1903A | 12.50 | 0.80 | 0.075 | 73.45 | - |
| 1903 | 12.50 | 0.90 | 0.087 | 73.20 | - |
| 0182 | 12.70 | 0.70 | 0.070 | 74.80 | - |
| 1904 | 12.70 | 1.00 | 0.098 | 74.20 | - |
| 1800 | 15.00 | 0.70 | 0.083 | 88.60 | - |
| 1905 | 15.88 | 0.75 | 0.094 | 93.78 | - |
| 1906 | 15.88 | 0.90 | 0.112 | 93.48 | - |
| 1907 | 15.88 | 1.00 | 0.124 | 93.28 | - |
| 1908 | 19.05 | 2.50 | 0.353 | 109.30 | - |
| 1909 | 19.05 | 0.75 | 0.113 | 112.80 | - |
| 1910 | 19.05 | 1.00 | 0.149 | 112.30 | - |
| 1911 | 25.40 | 0.75 | 0.152 | 150.90 | - |
| 1912 | 25.40 | 0.90 | 0.182 | 150.60 | - |
| 1913 | 55.00 | 2.00 | 0.818 | 306.00 | - |

UNEQUAL CHANNELS Group : III - 2 (1)

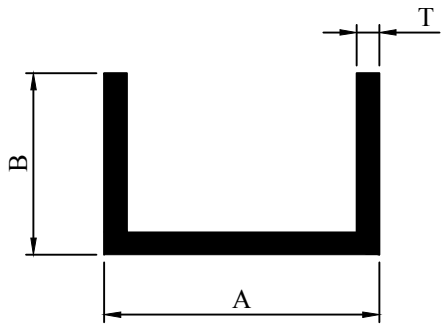



| SECTION NO | A MM | B MM | T MM | W KG/M | P MM |
|---|---|---|---|---|---|
| 1914 | 7.00 | 12.00 | 0.60 | 0.048 | 60.03 |
| 1950 | 8.75 | 10.30 | 0.70 | 0.050 | 54.20 |
| 1952 | 9.00 | 8.00 | 0.60 | 0.039 | 48.80 |
| 1951 | 9.00 | 8.00 | 0.70 | 0.045 | 48.60 |
| 1953 | 13.00 | 25.00 | 1.40 | 0.228 | 123.20 |
| 1954 | 15.00 | 40.00 | 1.20 | 0.202 | 187.71 |
| 1918A | 14.20 | 20.00 | 1.10 | 0.155 | 106.20 |
| 1919A | 16.20 | 20.00 | 1.10 | 0.161 | 110.20 |
| 1801 | 21.00 | 19.00 | 1.80 | 0.270 | 114.40 |
| 1955 | 25.40 | 12.70 | 1.00 | 0.132 | 99.60 |
| 1920A | 30.00 | 20.00 | 0.90 | 0.166 | 138.20 |
| 1956 | 35.00 | 10.00 | 1.20 | 0.171 | 107.60 |
| 1957 | 38.00 | 40.00 | 2.00 | 0.618 | 232.00 |
| 1958 | 40.00 | 20.00 | 3.00 | 0.602 | 174.00 |
| 1959 | 40.00 | 25.00 | 3.00 | 0.683 | 174.00 |
| 0104 | 50.00 | 12.00 | 0.90 | 0.176 | 146.20 |
| 1960 | 53.00 | 23.40 | 1.30 | 0.342 | 197.00 |
| 1924A | 60.00 | 30.00 | 0.90 | 0.288 | 238.20 |
| 1961 | 60.00 | 32.00 | 3.00 | 0.959 | 242,00 |
| 1962 | 60.00 | 43.00 | 2.00 | 0.770 | 288.00 |
| 1963 | 75.00 | 12.29 | 1.00 | 0.268 | 199.60 |
| 1964 | 101.60 | 50.80 | 6.92 | 3.754 | 388.85 |

SQUARE HOLLOWS Group : IV - 1 (1)





| SECTION NO | A MM | T MM | RADIUS CORNER | W KG/M | P MM |
|---|---|---|---|---|---|
| 2503 | 7.00 | 0.60 | - | 0.042 | 28.00 |
| 2500A | 9.00 | 0.60 | - | 0.055 | 36.00 |
| 2501 | 10.00 | 0.60 | - | 0.061 | 40.00 |
| 2502 | 11.00 | 0.60 | - | 0.068 | 44.00 |
| 2504A | 11.00 | 0.65 | 0.30 | 0.073 | 43.48 |
| 2504 | 11.00 | 0.70 | 0.30 | 0.078 | 44.00 |
| 2505 | 11.50 | 0.70 | - | 0.082 | 46.00 |
| 2506 | 12.00 | 0.70 | - | 0.086 | 48.00 |
| 4000 | 12.70 | 0.80 | - | 0.103 | 50.80 |
| 2507 | 13.00 | 0.60 | - | 0.081 | 52.00 |
| 2508 | 14.00 | 0.60 | - | 0.087 | 56.00 |
| 2509 | 15.00 | 0.60 | - | 0.094 | 60.00 |
| 2510 | 15.00 | 0.65 | - | 0.101 | 60.00 |
| 2511 | 15.00 | 0.70 | - | 0.109 | 60.00 |
| 2512 | 15.00 | 1.50 | - | 0.220 | 60.00 |
| 2512R | 15.00 | 1.50 | 1.50 | 0.216 | 57.43 |
| 2513 | 16.00 | 0.60 | - | 0.100 | 64.00 |
| 2514 | 16.00 | 0.60 | 0.30 | 0.100 | 63.48 |
| 2515 | 16.00 | 0.70 | - | 0.116 | 64.00 |
| 2516 | 16.00 | 0.65 | - | 0.108 | 64.00 |
| 2517 | 16.00 | 1.00 | - | 0.163 | 64.00 |
| 2518 | 17.00 | 0.65 | - | 0.115 | 67.48 |
| 2519 | 17.00 | 0.60 | 0.30 | 0.107 | 68.00 |
| 2520 | 17.00 | 0.70 | - | 0.147 | 80.00 |
| 2522 | 18.00 | 0.60 | - | 0.113 | 72.00 |
| 2521 | 18.00 | 0.65 | - | 0.122 | 72.00 |

SQUARE HOLLOWS Group : IV - 1 (2)





| SECTION NO | A MM | T MM | RADIUS CORNER | W KG/M | P MM |
|---|---|---|---|---|---|
| 2523 | 18.00 | 0.70 | - | 0.131 | 72.00 |
| 2522 | 18.00 | 0.60 | - | 0.113 | 72.00 |
| 2525 | 19.00 | 0.60 | - | 0.120 | 76.00 |
| 2524 | 19.00 | 1.50 | - | 0.285 | 76.00 |
| 2526 | 19.00 | 1.70 | - | 0.319 | 76.00 |
| 2527 | 19.05 | 0.65 | - | 0.130 | 76.20 |
| 2528 | 19.05 | 1.00 | - | 0.196 | 76.20 |
| 2531 | 20.00 | 0.60 | - | 0.126 | 80.00 |
| 2532 | 20.00 | 0.70 | - | 0.147 | 80.00 |
| 2529 | 20.00 | 0.80 | - | 0.167 | 80.00 |
| 2534 | 20.00 | 1.20 | - | 0.245 | 80.00 |
| 2591 | 20.00 | 1.20 | 2.00 | 0.237 | 76.57 |
| 2534A | 20.00 | 1.40 | 1.40 | 0.279 | 77.60 |
| 2535 | 20.00 | 1.50 | - | 0.301 | 80.00 |
| 2535A | 20.00 | 2.00 | 2.50 | 0.376 | 75.71 |
| 2530 | 20.00 | 3.00 | 3.00 | 0.532 | 74.85 |
| 2537 | 21.00 | 0.60 | - | 0.133 | 84.00 |
| 2533 | 21.00 | 0.65 | - | 0.143 | 84.00 |
| 2536 | 21.00 | 0.70 | - | 0.154 | 84.00 |
| 2539 | 21.40 | 1.60 | 2.50 | 0.331 | 81.31 |
| 2538 | 22.00 | 1.50 | - | 0.333 | 88.00 |
| 2542 | 22.50 | 0.60 | - | 0.142 | 90.00 |
| 2543 | 23.00 | 0.60 | - | 0.146 | 92.00 |
| 2544 | 23.00 | 0.65 | - | 0.575 | 92.00 |
| 2545 | 23.00 | 1.00 | - | 0.238 | 92.00 |

SQUARE HOLLOWS Group : IV - 1 (3)





| SECTION NO | A MM | T MM | RADIUS CORNER | W KG/M | P MM |
|---|---|---|---|---|---|
| 2546 | 23.00 | 2.00 | - | 0.455 | 92.00 |
| 2547 | 23.50 | 0.60 | - | 0.149 | 94.00 |
| 2548 | 23.50 | 0.65 | | 0.161 | 94.00 |
| 2549 | 23.50 | 0.70 | - | 0.173 | 94.00 |
| 2550A | 25.00 | 0.70 | - | 0.184 | 100.00 |
| 2551 | 25.00 | 0.80 | - | 0.210 | 100.00 |
| 2590 | 25.00 | 1.20 | 2.00 | 0.302 | 96.57 |
| 2553 | 25.00 | 1.50 | 1.00 | 0.380 | 98.28 |
| 2563RA | 25.00 | 1.50 | 1.50 | 0.383 | 97.43 |
| 2554 | 25.00 | 1.60 | - | 0.406 | 100.00 |
| 2555 | 25.00 | 1.60 | 1.50 | 0.401 | 97.42 |
| 2556 | 25.00 | 1.60 | 3.20 | 0.388 | 94.51 |
| 2557 | 25.00 | 1.70 | - | 0.429 | 100.00 |
| 2559 | 25.00 | 1.80 | - | 0.453 | 100.00 |
| 2558A | 25.00 | 2.00 | 2.50 | 0.484 | 95.70 |
| 2560 | 25.00 | 2.00 | 4.00 | 0.471 | 93.13 |
| 2561 | 25.00 | 2.50 | - | 0.607 | 98.28 |
| 2562 | 25.00 | 3.00 | - | 0.715 | 100.00 |
| 2564 | 25.00 | 3.00 | 3.00 | 0.694 | 94.85 |
| 2566 | 25.40 | 1.00 | - | 0.264 | 101.60 |
| 2563R | 25.40 | 1.50 | 1.50 | 0.385 | 99.02 |
| 2568 | 25.40 | 2.80 | - | 0.686 | 101.60 |
| 2569 | 26.00 | 1.40 | 2.50 | 0.361 | 99.71 |
| 2570 | 27.00 | 1.50 | 2.90 | 0.400 | 103.02 |
| 2571 | 30.00 | 1.50 | - | 0.463 | 120.00 |

SQUARE HOLLOWS Group : IV - 1 (4)





| SECTION NO | A MM | T MM | RADIUS CORNER | W KG/M | P MM |
|---|---|---|---|---|---|
| 2567A | 30.00 | 1.90 | 1.90 | 0.572 | 116.74 |
| 2572 | 31.70 | 1.60 | 4.50 | 0.495 | 119.07 |
| 2573 | 32.00 | 1.50 | - | 0.496 | 128.00 |
| 2575 | 32.00 | 1.60 | 4.50 | 0.500 | 120.27 |
| 2576 | 32.00 | 2.00 | - | 0.650 | 128.00 |
| 2577 | 32.00 | 3.00 | - | 0.943 | 128.00 |
| 2580 | 37.50 | 1.40 | 0.70 | 0.547 | 148.80 |
| 2574B | 38.00 | 1.00 | - | 0.401 | 152.00 |
| 2574TB | 38.00 | 1.20 | - | 0.479 | 152.00 |
| 2574R | 38.00 | 1.30 | 3.00 | 0.503 | 146.85 |
| 2574C | 38.00 | 2.00 | 2.00 | 0.771 | 148.57 |
| 2574A | 38.10 | 0.90 | - | 0.363 | 152.40 |
| 2578A | 40.00 | 1.00 | - | 0.423 | 160.00 |
| 2578B | 40.00 | 1.20 | - | 0.505 | 160.00 |
| 2592 | 40.00 | 1.40 | - | 0.586 | 160.00 |
| 2593 | 40.00 | 1.80 | - | 0.745 | 160.00 |
| 2582 | 40.00 | 1.85 | - | 0.765 | 160.00 |
| 2579R | 40.00 | 2.00 | 2.00 | 0.816 | 156.57 |
| 2585B | 40.00 | 2.00 | - | 0.824 | 160.00 |
| 2582TB | 40.00 | 3.00 | - | 1.203 | 160.00 |
| 2581 | 44.45 | 1.20 | - | 0.563 | 177.80 |
| 2581R | 44.45 | 1.20 | 1.20 | 0.563 | 175.74 |
| 2581A | 44.45 | 1.22 | - | 0.572 | 177.80 |
| 2583 | 45.00 | 2.50 | - | 1.152 | 180.00 |
| 2584 | 50.00 | 1.25 | 0.70 | 0.659 | 198.80 |

SQUARE HOLLOWS Group : IV - 1 (5)





| SECTION NO | A MM | T MM | RADIUS CORNER | W KG/M | P MM |
|---|---|---|---|---|---|
| 2585 | 50.00 | 1.50 | - | 0.789 | 200.00 |
| 2586 | 50.00 | 1.60 | 3.00 | 0.823 | 194.85 |
| 2587A | 50.00 | 2.00 | - | 1.041 | 200.00 |
| 2587R | 50.00 | 2.00 | 1.00 | 1.076 | 198.28 |
| 2589R | 50.30 | 1.70 | 2.00 | 0.887 | 197.77 |
| 2594 | 50.80 | 1.80 | 6.00 | 0.913 | 192.90 |
| 2595 | 50.80 | 2.03 | - | 1.073 | 203.20 |
| 2596 | 50.80 | 3.18 | 4.75 | 1.642 | 195.05 |
| 2597 | 70.00 | 1.50 | - | 1.114 | 300.00 |
| 2598 | 75.00 | 1.60 | - | 1.273 | 300.00 |
| 2599 | 76.00 | 6.20 | 16.00 | 4.319 | 276.53 |
| 2588 | 90.00 | 1.40 | - | 1.345 | 360.00 |

SQUARE HOLLOWS (OTHER) Group : IV - 1 (6)





| SECTION NO | A MM | T MM | RADIUS | W KG/M | P MM |
|---|---|---|---|---|---|
| 2400R | 19.80 | 0.65 | 8.50 | 0.129 | 75.55 |
| 2599R | 20.00 | 0.60 | 8.50 | 0.120 | 76.35 |
| 2531BR | 20.00 | 0.65 | 8.50 | 0.130 | 76.35 |
| 2542R | 22.50 | 0.60 | 8.50 | 0.137 | 86.35 |
| 2602R | 23.00 | 0.60 | 8.50 | 0.140 | 88.35 |
| 2544R | 23.00 | 0.65 | 8.50 | 0.151 | 88.35 |
| 2548R | 23.50 | 0.65 | 8.50 | 0.155 | 90.35 |
| 2551R | 25.00 | 0.80 | 8.50 | 0.202 | 96.35 |
| 2551RTP | 25.00 | 0.70 | 8.50 | 0.178 | 96.37 |
| 2401R | 27.50 | 1.50 | 8.00 | 0.410 | 106.57 |
| 2402R | 27.50 | 1.80 | 8.00 | 0.487 | 106.57 |
| 2403R | 32.05 | 2.00 | 8.00 | 0.635 | 124.77 |

RECTANGULAR HOLLOWS Group : IV - 2 (1)

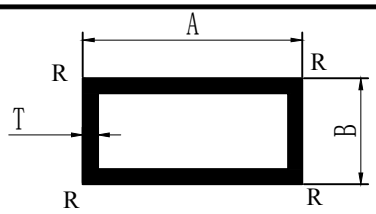



| SECTION NO | A MM | B MM | T MM | W KG/M | P MM | RADIUS CORNER |
|---|---|---|---|---|---|---|
| 2600 | 13.00 | 8.00 | 0.60 | 0.064 | 42.00 | - |
| 2601 | 14.00 | 10.00 | 0.60 | 0.074 | 48.00 | - |
| 2602 | 16.00 | 10.00 | 0.60 | 0.081 | 52.00 | - |
| 2603 | 16.00 | 10.00 | 0.65 | 0.087 | 52.00 | - |
| 2604 | 17.00 | 10.00 | 0.60 | 0.084 | 54.00 | - |
| 2605 | 18.00 | 10.00 | 0.60 | 0.087 | 56.00 | - |
| 2606 | 18.00 | 10.00 | 0.65 | 0.094 | 56.00 | - |
| 2607 | 18.00 | 10.00 | 0.65 | 0.093 | 56.99 | STRIPE |
| 2608 | 18.00 | 10.00 | 0.70 | 0.101 | 56.00 | - |
| 2609 | 19.00 | 10.00 | 0.60 | 0.090 | 58.00 | - |
| 2609A | 19.90 | 11.95 | 0.60 | 0.098 | 65.30 | STRIPE |
| 2610 | 20.00 | 10.00 | 0.60 | 0.094 | 60.00 | - |
| 2611 | 20.00 | 12.00 | 0.65 | 0.106 | 65.60 | STRIPE |
| 2612 | 20.00 | 12.00 | 0.75 | 0.124 | 64.00 | - |
| 2612A | 20.00 | 12.00 | 0.80 | 0.130 | 63.87 | 0.50 |
| 2613 | 21.00 | 10.00 | 0.65 | 0.105 | 62.00 | - |
| 2614 | 21.00 | 11.00 | 0.60 | 0.100 | 64.00 | - |
| 2615 | 21.00 | 11.00 | 0.65 | 0.108 | 64.00 | - |
| 2616 | 21.00 | 11.00 | 0.70 | 0.116 | 64.00 | - |
| 2617 | 22.00 | 10.00 | 0.60 | 0.100 | 64.00 | - |
| 2805 | 22.50 | 11.00 | 0.60 | 0.105 | 67.00 | - |
| 2618 | 23.00 | 17.00 | 0.65 | 0.136 | 80.00 | - |
| 2619 | 23.50 | 11.70 | 0.60 | 0.111 | 70.40 | - |
| 2620 | 23.50 | 11.70 | 0.65 | 0.119 | 70.40 | - |
| 2621 | 23.50 | 11.70 | 0.70 | 0.128 | 70.40 | - |
| 2622 | 25.00 | 12.50 | 0.80 | 0.156 | 75.00 | - |

RECTANGULAR HOLLOWS Group : IV - 2 (2)

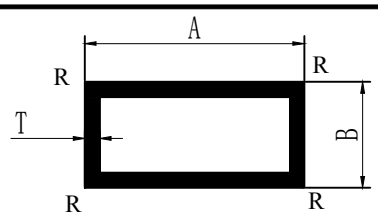



| SECTION NO | A MM | B MM | T MM | W KG/M | P MM | RADIUS CORNER |
|---|---|---|---|---|---|---|
| 2623 | 25.00 | 18.00 | 0.65 | 0.147 | 86.00 | - |
| 2624 | 25.00 | 19.00 | 0.70 | 0.162 | 88.00 | - |
| 2625 | 25.40 | 19.05 | 1.10 | 0.252 | 88.90 | - |
| 2626 | 26.00 | 17.00 | 0.65 | 0.147 | 86.00 | - |
| 2627 | 28.00 | 18.00 | 0.60 | 0.146 | 92.00 | - |
| 2628 | 28.00 | 18.00 | 0.65 | 0.157 | 92.00 | - |
| 2629 | 28.00 | 22.00 | 2.00 | 0.496 | 98.28 | 1.00 |
| 2630AR | 30.00 | 15.00 | 1.50 | 0.337 | 87.43 | 1.50 |
| 2630 | 30.00 | 20.00 | 0.60 | 0.159 | 100.00 | - |
| 2631 | 30.00 | 20.00 | 0.65 | 0.172 | 100.00 | - |
| 2632 | 30.00 | 20.00 | 0.65 | 0.160 | 93.13 | 4.00 |
| 2633 | 30.00 | 20.00 | 0.70 | 0.184 | 100.00 | - |
| 2634 | 30.00 | 20.00 | 0.70 | 0.179 | 96.57 | 2.00 |
| 2635 | 31.00 | 21.00 | 0.65 | 0.179 | 104.00 | - |
| 2636 | 33.00 | 21.00 | 0.60 | 0.172 | 108.00 | - |
| 2637 | 33.00 | 21.00 | 0.65 | 0.186 | 108.00 | - |
| 2638 | 33.00 | 21.00 | 0.70 | 0.200 | 108.00 | - |
| 2639 | 34.00 | 22.00 | 0.65 | 0.193 | 111.49 | 0.30 |
| 2640 | 34.00 | 22.00 | 0.70 | 0.207 | 111.48 | 0.30 |
| 2641 | 34.50 | 23.00 | 0.60 | 0.183 | 115.00 | - |
| 2804 | 34.50 | 23.00 | 0.70 | 0.213 | 115.00 | - |
| 2642 | 35.00 | 20.00 | 1.50 | 0.423 | 110.00 | - |
| 2643 | 35.00 | 28.00 | 2.00 | 0.637 | 124.28 | 1.00 |
| 2676 | 38.00 | 16.00 | 1.40 | 0.374 | 102.85 | 3.00 |
| 2645 | 38.00 | 25.00 | 0.80 | 0.266 | 126.00 | - |

RECTANGULAR HOLLOWS Group : IV - 2 (3)

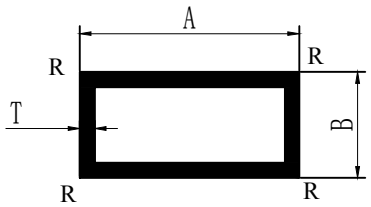



| SECTION NO | A MM | B MM | T MM | W KG/M | P MM | RADIUS CORNER |
|---|---|---|---|---|---|---|
| 2646 | 38.00 | 25.00 | 1.50 | 0.488 | 126.00 | - |
| 2647 | 38.10 | 25.40 | 0.90 | 0.301 | 127.00 | - |
| 2648 | 38.10 | 25.40 | 1.00 | 0.333 | 127.00 | - |
| 2649 | 38.10 | 25.40 | 2.54 | 0.804 | 127.00 | - |
| 2675 | 40.00 | 20.00 | 1.20 | 0.364 | 115.71 | 2.50 |
| 2650 | 40.00 | 20.00 | 1.50 | 0.462 | 118.80 | 0.70 |
| 2650A | 40.00 | 20.00 | 1.50 | 0.458 | 117.43 | 1.50 |
| 2650C | 40.00 | 20.00 | 2.00 | 0.579 | 113.13 | 4.00 |
| 2651 | 44.00 | 22.00 | 0.70 | 0.245 | 132.00 | - |
| 2652 | 45.00 | 22.50 | 0.70 | 0.251 | 135.00 | - |
| 2653 | 46.00 | 23.00 | 0.60 | 0.221 | 138.00 | - |
| 2654 | 46.00 | 24.00 | 0.60 | 0.224 | 140.00 | - |
| 2655A | 50.00 | 25.00 | 1.00 | 0.396 | 150.00 | - |
| 2655 | 50.00 | 25.00 | 1.60 | 0.623 | 150.00 | - |
| 2656 | 50.00 | 25.00 | 1.60 | 0.606 | 144.85 | 3.00 |
| 2657 | 50.00 | 25.00 | 3.00 | 1.122 | 150.00 | - |
| 2658 | 50.00 | 25.00 | 3.00 | 1.101 | 144.85 | 3.00 |
| 2677 | 50.00 | 40.00 | 3.00 | 1.366 | 180.00 | - |
| 2660 | 50.80 | 25.40 | 1.00 | 0.402 | 152.40 | - |
| 2660A | 50.80 | 25.40 | 0.90 | 0.363 | 152.40 | - |
| 2661AR | 60.00 | 15.00 | 1.50 | 0.581 | 147.43 | 1.50 |
| 2662 | 60.00 | 40.00 | 1.40 | 0.738 | 200.00 | - |
| 2803 | 60.00 | 40.00 | 1.60 | 0.837 | 198.28 | 1.00 |
| 2663 | 60.00 | 40.00 | 3.00 | 1.528 | 200.00 | - |
| 2664 | 65.00 | 16.00 | 1.20 | 0.498 | 156.85 | 3.00 |

RECTANGULAR HOLLOWS Group : IV - 2 (4)

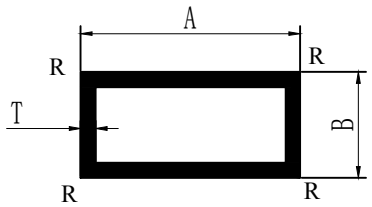



| SECTION NO | A MM | B MM | T MM | W KG/M | P MM | RADIUS CORNER |
|---|---|---|---|---|---|---|
| 2665 | 65.00 | 16.00 | 1.40 | 0.572 | 156.85 | 3.00 |
| 2814 | 65.00 | 28.00 | 1.15 | 0.534 | 178.18 | 6.00 |
| 2677 | 70.00 | 25.00 | 1.70 | 0.844 | 190.00 | - |
| 26771 | 75.00 | 25.00 | 1.00 | 0.531 | 200.00 | - |
| 2678 | 75.00 | 50.00 | 3.00 | 1.935 | 250.00 | - |
| 2679 | 76.20 | 25.40 | 1.00 | 0.540 | 203.20 | - |
| 2675A | 76.20 | 25.40 | 0.85 | 0.460 | 203.20 | - |
| 2680 | 76.20 | 25.40 | 2.36 | 1.239 | 203.20 | - |
| 2681 | 76.20 | 38.10 | 3.00 | 1.761 | 228.60 | - |
| 2682 | 80.00 | 16.00 | 1.40 | 0.692 | 186.00 | - |
| 2683 | 80.00 | 25.00 | 3.00 | 1.610 | 210.00 | - |
| 2684 | 80.00 | 40.00 | 2.30 | 1.439 | 240.00 | - |
| 2666 | 80.00 | 50.00 | 3.00 | 2.016 | 260.00 | - |
| 2667 | 100.00 | 10.00 | 1.20 | 0.700 | 220.00 | - |
| 2669 | 100.00 | 50.00 | 3.00 | 2.341 | 300.00 | - |
| 2672 | 101.10 | 50.80 | 4.50 | 3.485 | 303.80 | - |
| 2668A | 101.60 | 25.40 | 1.00 | 0.678 | 254.00 | - |
| 2671 | 101.60 | 25.40 | 2.80 | 1.842 | 254.00 | - |
| 2670 | 101.60 | 44.45 | 1.00 | 0.781 | 292.10 | - |
| 2673 | 150.00 | 50.00 | 2.00 | 2.125 | 400.00 | - |
| 2674 | 150.00 | 50.00 | 3.00 | 3.154 | 400.00 | - |

RECTANGULAR HOLLOWS (OTHERS) Group : IV - 2 (5)





| SECTION NO | A MM | B MM | T MM | W KG/M | P MM | RADIUS |
|---|---|---|---|---|---|---|
| 2807 | 33.00 | 21.00 | 0.60 | 0.166 | 104.35 | 8.50 |
| 2808 | 33.00 | 21.00 | 0.65 | 0.179 | 104.35 | 8.50 |
| 2689 | 34.50 | 23.00 | 0.60 | 0.177 | 111.35 | 8.50 |
| 2809 | 37.00 | 24.00 | 0.85 | 0.265 | 118.35 | 8.50 |
| 2810 | 38.00 | 25.00 | 0.80 | 0.259 | 122.35 | 8.50 |
| 2811 | 39.00 | 27.50 | 1.50 | 0.504 | 129.57 | 8.00 |
| 2812 | 39.00 | 27.50 | 1.80 | 0.599 | 129.57 | 8.00 |

ROUND TUBE Group : IV - 3 (1)





| SECTION NO | A MM | T MM | W KG/M | P MM |
|---|---|---|---|---|
| 2101 | 6.00 | 0.60 | 0.028 | 18.85 |
| 2001 | 6.10 | 0.70 | 0.032 | 19.16 |
| 2103 | 7.00 | 0.60 | 0.033 | 21.99 |
| 2002 | 7.00 | 0.65 | 0.035 | 21.99 |
| 2003 | 7.00 | 0.70 | 0.038 | 21.99 |
| 2106 | 7.50 | 0.60 | 0.035 | 23.56 |
| 2004 | 7.50 | 0.70 | 0.041 | 23.56 |
| 2108 | 8.00 | 0.60 | 0.038 | 25.13 |
| 2005 | 8.00 | 0.90 | 0.054 | 25.13 |
| 2006 | 8.00 | 1.00 | 0.060 | 25.13 |
| 2007 | 8.10 | 0.70 | 0.044 | 25.45 |
| 2008 | 8.20 | 0.65 | 0.042 | 25.76 |
| 2114 | 8.50 | 0.60 | 0.040 | 26.70 |
| 2009 | 8.50 | 0.65 | 0.043 | 26.70 |
| 2011 | 8.50 | 0.70 | 0.047 | 26.70 |
| 3005 | 8.50 | 0.75 | 0.050 | 26.70 |
| 2116 | 8.50 | 0.80 | 0.053 | 26.70 |
| 2013 | 8.50 | 1.00 | 0.064 | 26.70 |
| 2014 | 9.00 | 0.90 | 0.062 | 28.27 |
| 2245 | 9.50 | 1.00 | 0.072 | 29.85 |
| 2015 | 9.53 | 0.70 | 0.053 | 29.94 |
| 2017 | 9.53 | 1.20 | 0.085 | 29.94 |
| 2018 | 9.53 | 1.50 | 0.103 | 29.94 |
| 2019 | 9.60 | 0.70 | 0.053 | 30.16 |
| 2125 | 10.00 | 0.60 | 0.048 | 31.42 |

ROUND TUBE Group : IV - 3 (2)





| SECTION NO | A MM | T MM | W KG/M | P MM |
|---|---|---|---|---|
| 2126 | 10.00 | 0.90 | 0.070 | 31.42 |
| 2021 | 10.20 | 2.00 | 0.140 | 30.04 |
| 2128 | 10.50 | 0.60 | 0.051 | 32.99 |
| 2022 | 10.50 | 0.65 | 0.055 | 32.99 |
| 2130 | 11.00 | 0.60 | 0.053 | 34.56 |
| 2024 | 11.00 | 1.00 | 0.085 | 34.56 |
| 2025 | 11.00 | 3.25 | 0.214 | 34.56 |
| 2026 | 11.40 | 0.65 | 0.060 | 35.81 |
| 2027 | 11.40 | 0.70 | 0.064 | 35.81 |
| 2028 | 11.50 | 1.00 | 0.089 | 36.13 |
| 2029 | 11.60 | 2.00 | 0.164 | 36.44 |
| 2030 | 12.00 | 0.60 | 0.058 | 37.70 |
| 2031 | 12.00 | 0.65 | 0.063 | 37.70 |
| 2032 | 12.00 | 0.90 | 0.085 | 37.70 |
| 2033 | 12.70 | 0.70 | 0.072 | 39.90 |
| 2034 | 12.70 | 0.80 | 0.081 | 39.90 |
| 2035 | 12.70 | 0.91 | 0.091 | 39.90 |
| 2036 | 12.70 | 1.00 | 0.100 | 39.90 |
| 2144 | 12.70 | 1.20 | 0.118 | 39.90 |
| 2038 | 12.70 | 1.30 | 0.126 | 39.90 |
| 2039 | 12.70 | 1.50 | 0.143 | 39.90 |
| 2040 | 12.70 | 2.50 | 0.217 | 39.90 |
| 2149 | 13.00 | 0.60 | 0.063 | 40.84 |
| 2041 | 13.00 | 0.65 | 0.068 | 40.84 |
| 2152 | 14.00 | 0.60 | 0.068 | 43.98 |

ROUND TUBE Group : IV - 3 (3)





| SECTION NO | A MM | T MM | W KG/M | P MM |
|---|---|---|---|---|
| 2153 | 14.00 | 0.65 | 0.074 | 43.98 |
| 2153A | 14.00 | 1.20 | 0.131 | 43.98 |
| 2043 | 14.30 | 2.00 | 0.209 | 44.93 |
| 2044 | 14.50 | 0.65 | 0.077 | 45.55 |
| 2045 | 14.50 | 0.70 | 0.082 | 45.55 |
| 2046 | 15.00 | 0.65 | 0.079 | 47.12 |
| 2047 | 15.00 | 0.70 | 0.085 | 47.12 |
| 2048 | 15.00 | 1.00 | 0.119 | 47.12 |
| 2049 | 15.00 | 2.50 | 0.266 | 47.12 |
| 2050 | 15.80 | 1.00 | 0.126 | 49.64 |
| 2051 | 15.88 | 0.90 | 0.115 | 49.89 |
| 2052 | 15.88 | 1.00 | 0.127 | 49.89 |
| 2053 | 15.88 | 1.20 | 0.150 | 49.89 |
| 2054 | 15.88 | 1.42 | 0.175 | 49.89 |
| 2055 | 15.88 | 1.60 | 0.195 | 49.89 |
| 2056 | 15.88 | 3.00 | 0.329 | 49.89 |
| 2167A | 16.00 | 0.60 | 0.079 | 50.27 |
| 2057 | 16.00 | 0.70 | 0.091 | 50.27 |
| 2060 | 16.00 | 1.00 | 0.128 | 50.27 |
| 2171 | 16.00 | 1.20 | 0.151 | 50.27 |
| 2061 | 16.00 | 1.30 | 0.163 | 50.27 |
| 2062 | 16.00 | 1.60 | 0.196 | 50.27 |
| 2171A | 16.00 | 2.00 | 0.238 | 50.27 |
| 2174 | 16.50 | 0.60 | 0.081 | 51.84 |
| 2176 | 17.00 | 0.60 | 0.084 | 53.41 |

ROUND TUBE Group : IV - 3 (4)





| SECTION NO | A MM | T MM | W KG/M | P MM |
|---|---|---|---|---|
| 2063 | 17.00 | 1.60 | 0.210 | 53.41 |
| 2064 | 17.00 | 0.65 | 0.091 | 53.41 |
| 2065 | 17.50 | 0.65 | 0.093 | 54.98 |
| 2067 | 17.50 | 0.70 | 0.100 | 54.98 |
| 2182 | 18.00 | 0.60 | 0.089 | 56.55 |
| 2068 | 18.00 | 0.65 | 0.096 | 56.55 |
| 2069 | 18.00 | 0.70 | 0.103 | 56.55 |
| 2070 | 18.00 | 0.85 | 0.124 | 56.55 |
| 2071 | 18.00 | 1.00 | 0.145 | 56.55 |
| 2072 | 18.00 | 1.20 | 0.172 | 56.55 |
| 2073 | 18.00 | 5.00 | 0.533 | 56.55 |
| 2074 | 19.00 | 0.60 | 0.094 | 59.69 |
| 2075 | 19.00 | 0.65 | 0.102 | 59.69 |
| 2076 | 19.00 | 0.70 | 0.109 | 59.69 |
| 2077 | 19.00 | 0.85 | 0.131 | 59.69 |
| 2193 | 19.00 | 1.20 | 0.182 | 59.69 |
| 2078 | 19.00 | 1.50 | 0.224 | 59.69 |
| 2079 | 19.00 | 1.70 | 0.250 | 59.69 |
| 2080 | 19.00 | 2.00 | 0.289 | 59.69 |
| 2196A | 19.00 | 3.00 | 0.409 | 59.69 |
| 2198A | 19.05 | 0.60 | 0.094 | 59.85 |
| 2198 | 19.05 | 0.65 | 0.102 | 59.85 |
| 2084 | 19.05 | 0.80 | 0.124 | 59.85 |
| 2198B | 19.05 | 0.90 | 0.139 | 59.85 |
| 2083 | 19.05 | 1.03 | 0.158 | 59.85 |

ROUND TUBE Group : IV - 3 (5)





| SECTION NO | A MM | T MM | W KG/M | P MM |
|---|---|---|---|---|
| 2086 | 19.20 | 1.00 | 0.155 | 60.32 |
| 2087 | 19.40 | 0.60 | 0.096 | 60.95 |
| 2203A | 19.50 | 0.60 | 0.097 | 61.26 |
| 2204 | 20.00 | 0.60 | 0.099 | 62.83 |
| 2088 | 20.00 | 0.65 | 0.107 | 62.83 |
| 2089 | 20.00 | 0.70 | 0.115 | 62.83 |
| 2207 | 20.00 | 1.50 | 0.236 | 62.83 |
| 2090 | 20.00 | 1.60 | 0.251 | 62.83 |
| 2091 | 20.35 | 1.50 | 0.241 | 63.93 |
| 2092 | 20.50 | 1.30 | 0.213 | 64.40 |
| 2211 | 21.00 | 0.60 | 0.104 | 65.97 |
| 2093 | 21.00 | 0.70 | 0.121 | 65.97 |
| 2094 | 21.00 | 0.65 | 0.113 | 65.97 |
| 2095 | 21.00 | 2.00 | 0.324 | 65.97 |
| 2096 | 21.50 | 0.60 | 0.107 | 67.54 |
| 2097 | 21.50 | 1.50 | 0.255 | 67.54 |
| 2098 | 22.00 | 0.65 | 0.118 | 69.12 |
| 2099 | 22.00 | 0.70 | 0.127 | 69.12 |
| 2100 | 22.00 | 0.90 | 0.162 | 69.12 |
| 2104 | 22.00 | 1.30 | 0.229 | 69.12 |
| 2212 | 22.00 | 1.40 | 0.246 | 69.12 |
| 2246 | 22.00 | 1.20 | 0.213 | 69.12 |
| 2105 | 22.00 | 2.00 | 0.341 | 69.12 |
| 2107 | 22.00 | 3.00 | 0.485 | 69.12 |
| 2224A | 23.00 | 0.60 | 0.114 | 72.26 |

ROUND TUBE Group : IV - 3 (6)





| SECTION NO | A MM | T MM | W KG/M | P MM |
|---|---|---|---|---|
| 2224 | 23.00 | 0.70 | 0.133 | 72.26 |
| 2109 | 23.00 | 2.00 | 0.358 | 72.26 |
| 2227 | 24.00 | 0.70 | 0.139 | 75.40 |
| 2110 | 24.00 | 0.80 | 0.158 | 75.40 |
| 2228 | 25.00 | 0.70 | 0.145 | 78.54 |
| 2111 | 25.00 | 0.90 | 0.185 | 78.54 |
| 2112 | 25.00 | 1.00 | 0.204 | 78.54 |
| 2113 | 25.00 | 1.10 | 0.224 | 78.54 |
| 2229 | 25.00 | 1.20 | 0.243 | 78.54 |
| 2115 | 25.00 | 1.30 | 0.262 | 78.54 |
| 2235 | 25.00 | 1.50 | 0.300 | 78.54 |
| 2118 | 25.00 | 1.70 | 0.337 | 78.54 |
| 2120 | 25.00 | 1.80 | 0.356 | 78.54 |
| 2122 | 25.00 | 3.00 | 0.562 | 78.54 |
| 2248 | 25.20 | 2.50 | 0.483 | 79.17 |
| 2123 | 25.40 | 0.90 | 0.188 | 79.80 |
| 2241A | 25.40 | 0.95 | 0.198 | 79.80 |
| 2124 | 25.40 | 3.00 | 0.572 | 79.80 |
| 2247 | 25.75 | 1.50 | 0.310 | 80.90 |
| 2129 | 26.00 | 1.40 | 0.293 | 81.68 |
| 2237 | 26.00 | 1.85 | 0.380 | 81.68 |
| 2131 | 26.00 | 3.00 | 0.587 | 81.68 |
| 2132 | 26.50 | 1.50 | 0.319 | 83.25 |
| 2133 | 26.50 | 1.30 | 0.279 | 83.25 |

ROUND TUBE Group : IV - 3 (7)





| SECTION NO | A MM | T MM | W KG/M | P MM |
|---|---|---|---|---|
| 2234 | 27.00 | 0.60 | 0.135 | 84.82 |
| 2135 | 28.00 | 0.60 | 0.140 | 87.97 |
| 2236 | 28.00 | 1.60 | 0.360 | 87.97 |
| 2238A | 28.50 | 0.60 | 0.143 | 89.54 |
| 2238 | 28.50 | 1.50 | 0.345 | 89.54 |
| 2139 | 29.00 | 4.50 | 0.939 | 91.11 |
| 2256 | 30.00 | 1.20 | 0.294 | 94.25 |
| 2257 | 30.00 | 2.25 | 0.532 | 94.25 |
| 2141 | 31.75 | 1.00 | 0.262 | 99.75 |
| 2142 | 31.75 | 1.10 | 0.287 | 99.75 |
| 2143 | 32.00 | 0.70 | 0.187 | 100.53 |
| 2145 | 32.00 | 1.40 | 0.365 | 100.53 |
| 2146 | 32.00 | 1.50 | 0.390 | 100.53 |
| 2147 | 32.00 | 2.00 | 0.511 | 100.53 |
| 2148 | 33.00 | 3.00 | 0.766 | 103.67 |
| 2150 | 33.00 | 0.60 | 0.166 | 103.67 |
| 2151 | 33.00 | 1.50 | 0.402 | 103.67 |
| 2155 | 33.00 | 1.60 | 0.428 | 103.67 |
| 2156 | 33.00 | 6.50 | 1.467 | 103.67 |
| 2268A | 34.00 | 1.50 | 0.415 | 106.81 |
| 2157 | 35.00 | 1.50 | 0.428 | 109.96 |
| 2158 | 35.00 | 12.00 | 2.350 | 109.96 |
| 2159 | 37.00 | 1.40 | 0.424 | 116.24 |
| 2160 | 37.70 | 1.60 | 0.492 | 118.44 |
| 2161 | 38.00 | 1.50 | 0.466 | 119.38 |

ROUND TUBE Group : IV - 3 (8)





| SECTION NO | A MM | T MM | W KG/M | P MM |
|---|---|---|---|---|
| 2162 | 38.00 | 1.60 | 0.496 | 119.38 |
| 2163 | 38.00 | 4.50 | 1.283 | 119.38 |
| 2164 | 38.10 | 1.35 | 0.422 | 119.70 |
| 2270 | 38.10 | 2.00 | 0.615 | 119.70 |
| 2165 | 38.10 | 3.25 | 0.964 | 119.70 |
| 2166 | 38.10 | 8.00 | 2.050 | 119.70 |
| 2168 | 38.85 | 5.10 | 1.465 | 122.05 |
| 2169 | 38.85 | 6.425 | 1.774 | 122.05 |
| 2170 | 40.00 | 1.50 | 0.492 | 125.66 |
| 2248A | 40.00 | 2.50 | 0.798 | 125.66 |
| 2172 | 40.00 | 3.00 | 0.945 | 125.66 |
| 2177 | 42.00 | 2.00 | 0.681 | 131.95 |
| 2178 | 43.00 | 0.70 | 0.252 | 135.09 |
| 2179 | 43.00 | 1.70 | 0.598 | 135.09 |
| 2180 | 43.00 | 1.85 | 0.648 | 135.09 |
| 2181 | 43.00 | 2.00 | 0.698 | 135.09 |
| 2183 | 44.45 | 3.25 | 1.140 | 139.64 |
| 2184 | 46.00 | 3.50 | 1.266 | 144.51 |
| 2185 | 48.00 | 4.47 | 1.657 | 150.80 |
| 2186 | 50.00 | 1.20 | 0.499 | 157.08 |
| 2187 | 50.00 | 1.50 | 0.619 | 157.08 |
| 2188 | 50.00 | 3.00 | 1.200 | 157.08 |
| 2189 | 50.00 | 4.00 | 1.567 | 157.08 |
| 2190 | 55.00 | 2.00 | 0.902 | 172.79 |
| 2191 | 56.00 | 3.00 | 1.354 | 175.93 |

ROUND TUBE Group : IV - 3 (9)





| SECTION NO | A MM | T MM | W KG/M | P MM |
|---|---|---|---|---|
| 2192 | 60.00 | 9.00 | 3.908 | 188.50 |
| 2194 | 63.50 | 6.35 | 3.090 | 199.50 |
| 2301 | 64.00 | 2.00 | 1.056 | 201.06 |
| 2195 | 66.00 | 6.00 | 3.065 | 207.35 |
| 2197 | 70.00 | 3.75 | 2.115 | 219.91 |
| 2199 | 76.00 | 8.00 | 4.632 | 238.76 |
| 2200 | 76.00 | 10.00 | 5.619 | 238.76 |
| 2201 | 76.20 | 1.00 | 0.640 | 239.39 |
| 2202 | 76.20 | 1.20 | 0.766 | 239.39 |
| 2205 | 76.20 | 1.30 | 0.829 | 239.39 |
| 2206 | 76.20 | 4.75 | 2.890 | 239.39 |
| 2208 | 76.20 | 5.50 | 3.311 | 239.39 |
| 2210 | 76.20 | 6.35 | 3.776 | 239.39 |
| 2213 | 77.00 | 3.00 | 1.890 | 241.90 |
| 2214 | 78.00 | 2.50 | 1.607 | 245.04 |
| 2215 | 78.00 | 3.50 | 2.220 | 245.04 |
| 2216 | 78.00 | 21.50 | 10.342 | 245.04 |
| 2217 | 80.00 | 1.60 | 1.068 | 251.33 |
| 2218 | 80.00 | 5.00 | 3.193 | 251.33 |
| 2219 | 81.00 | 6.00 | 3.831 | 254.47 |
| 2220 | 87.10 | 1.30 | 0.950 | 273.63 |
| 2221 | 88.00 | 2.50 | 1.820 | 276.46 |
| 2222 | 88.50 | 1.30 | 0.965 | 278.03 |
| 2322AR | 88.90 | 1.20 | 0.896 | 279.29 |
| 2223 | 90.00 | 1.30 | 0.982 | 282.74 |

ROUND TUBE Group : IV - 3 (10)





| SECTION NO | A MM | T MM | W KG/M | P MM |
|---|---|---|---|---|
| 2225 | 92.00 | 10.00 | 6.981 | 289.03 |
| 2226 | 94.00 | 11.00 | 7.773 | 295.31 |
| 2230 | 96.00 | 2.50 | 1.990 | 301.59 |
| 2231 | 96.00 | 3.00 | 2.375 | 301.59 |
| 2232 | 98.00 | 4.00 | 3.201 | 307.88 |
| 2233 | 99.00 | 1.40 | 1.163 | 311.02 |
| 2239 | 100.00 | 1.60 | 1.340 | 314.16 |
| 2242 | 105.00 | 5.90 | 4.978 | 329.87 |
| 2243 | 107.00 | 4.00 | 3.508 | 336.15 |
| 2244 | 120.00 | 1.80 | 1.811 | 376.99 |
| 3001 | 25.00 | 2.00 | 0.392 | 78.54 |
| 3002 | 12.00 | 3.00 | 0.230 | 37.70 |
| 3004 | 26.00 | 5.00 | 0.894 | 81.68 |
| 3005 | 8.50 | 0.75 | 0.050 | 26.70 |


ASSEMBLY DETAIL : SPANDRELS Group : V - 1

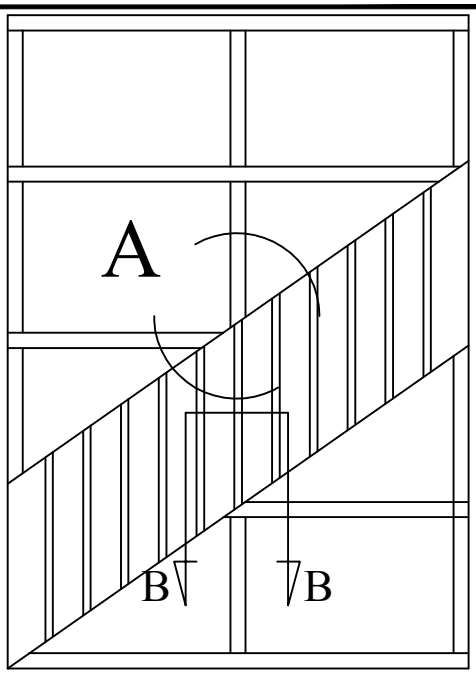


FRONT ELEVATION


PERSPECTIVE
DETAIL - A

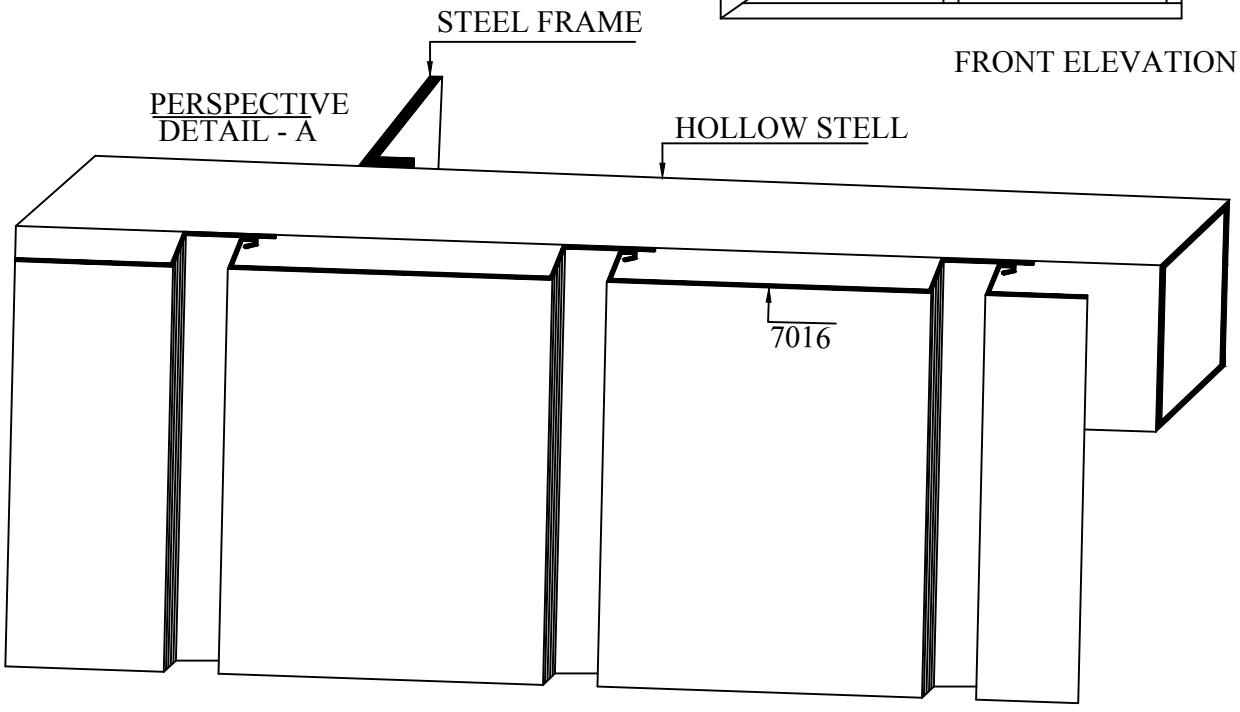

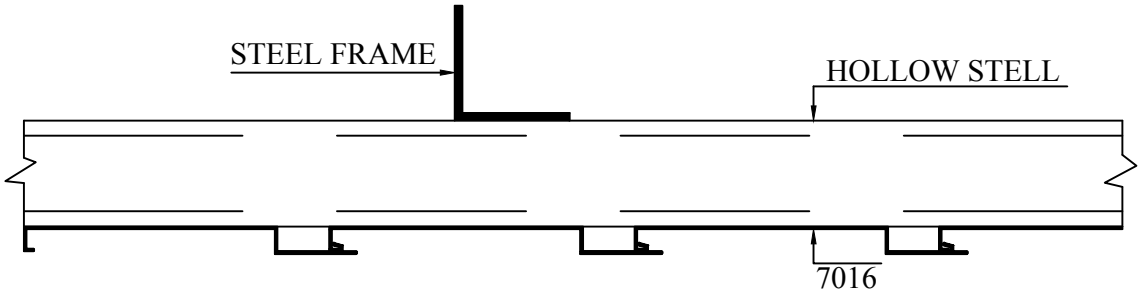




SECTION B-B

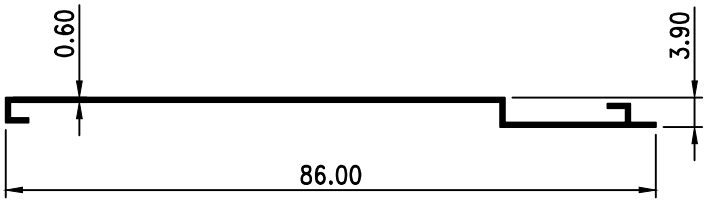
SPANDRELS Group : V - 1 (1)

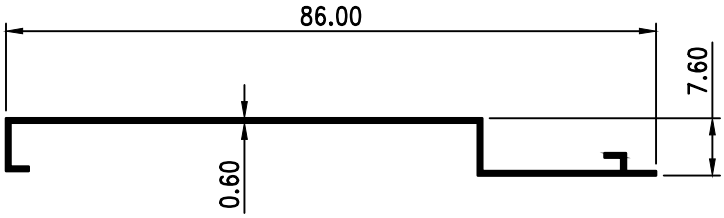



SECTION NO:7010
W=0.161 KG/M
P=199.80 MM





SECTION NO:7027
W=0.173 KG/M
P=214.00 MM

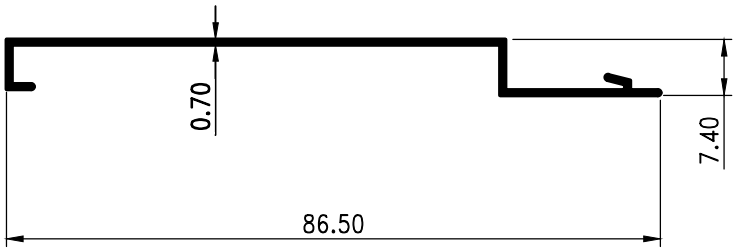


SECTION NO:7031
W = 0.201 KG/M
P = 212.60 MM

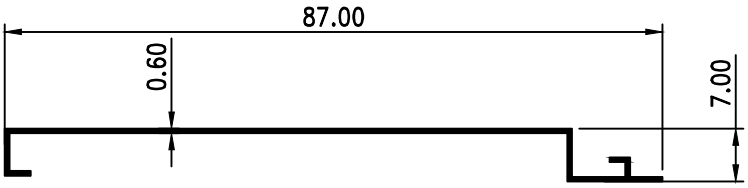



SECTION NO:7035
W=0.173 KG/M
P=214.20 MM

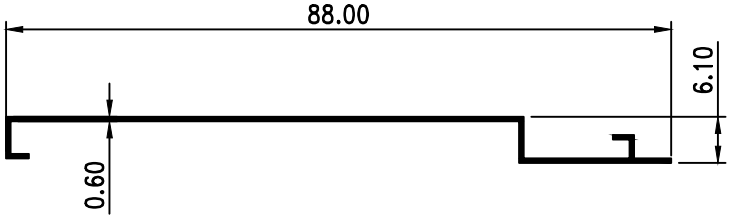



SECTION NO:7013
W=0.173 KG/M
P=213.40 MM


SPANDRELS Group : V - 1 (2)

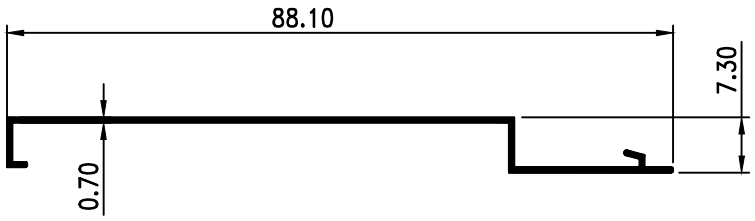



SECTION NO:7016
W=0.202 KG/M
P=213.48 MM

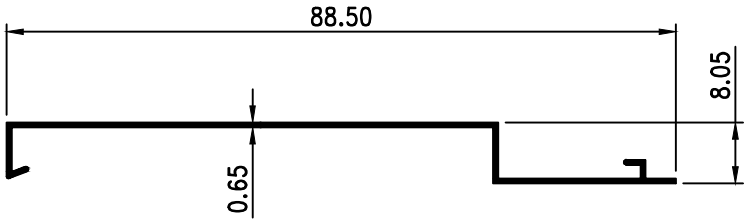



SECTION NO:7024
W=0.193 KG/M
P=219.75 MM

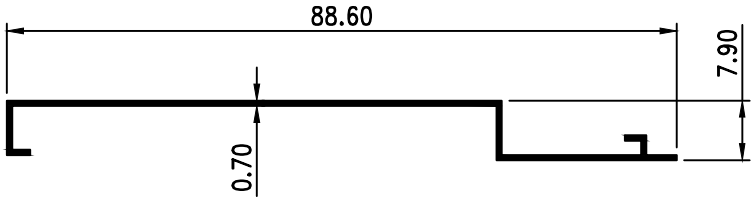


SECTION NO:7022
W=0.208 KG/M
P=220.26 MM

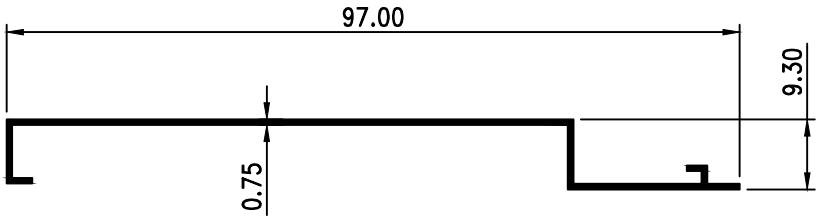



SECTION NO:7026
W=0.245 KG/M
P=242.20 MM

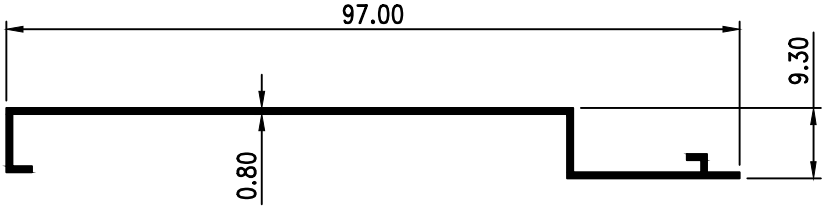



SECTION NO:7025
W=0.260 KG/M
P=241.80 MM

## SPANDRELS


Group : V - 1 (3)

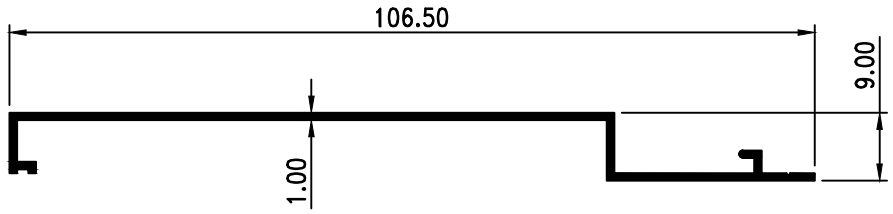



SECTION NO:7023
W=0.350 KG/M
P=260.86 MM

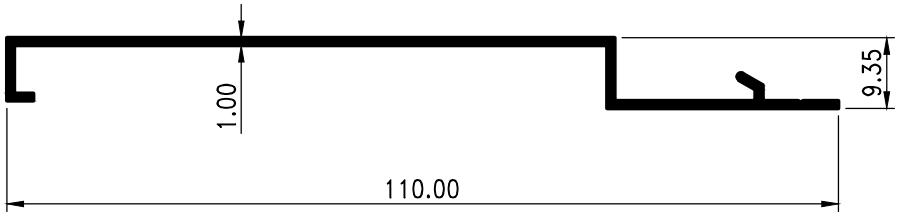


SECTION NO:7030
W = 0.361 KG/M
P = 268.34 MM

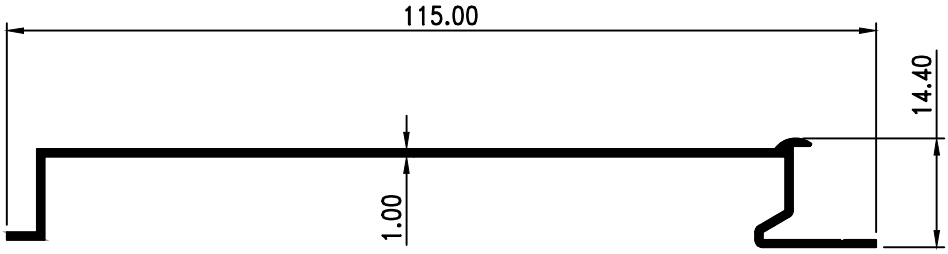



SECTION NO:7028
W=0.401 KG/M
P=296.19 MM

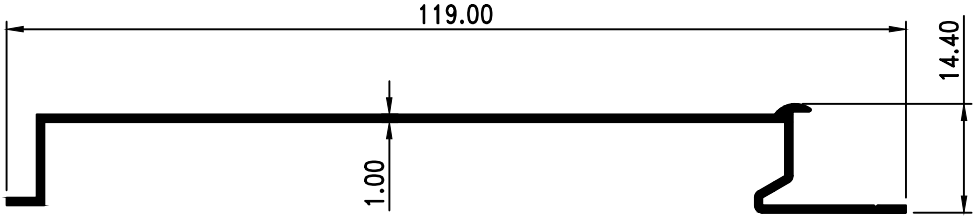



SECTION NO:7029
W=0.412 KG/M
P=304.191 MM

## SPANDRELS


Group : V - 1 (4)

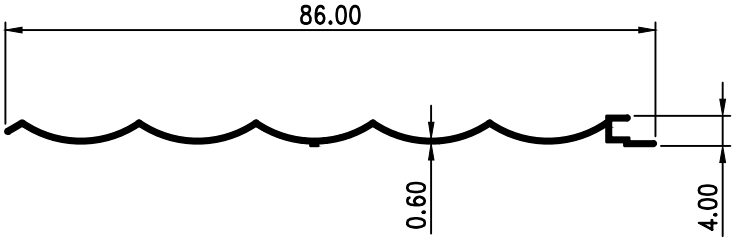


SECTION NO:7032
W=0.158 KG/M
P=194.73 MM

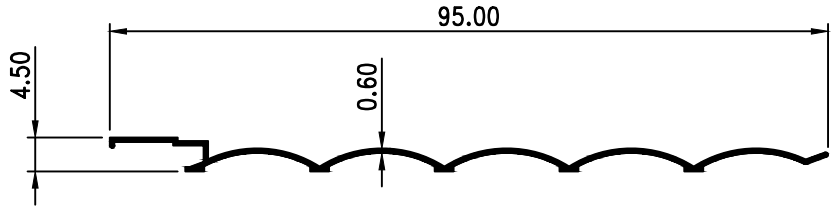



SECTION NO:7012
W=0.181 KG/M
P=216.39 MM

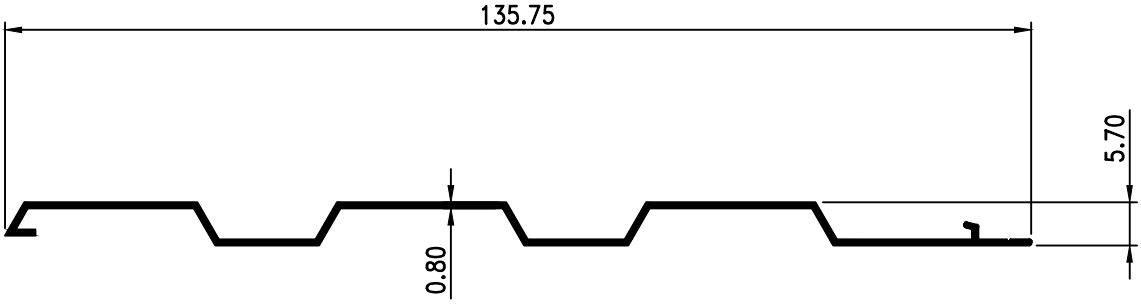



SECTION NO:7015
W=0.341 KG/M
P=316.55 MM


## ASSEMBLY DETAIL : SHOP FRONT 3 INCH — Group VI - 1

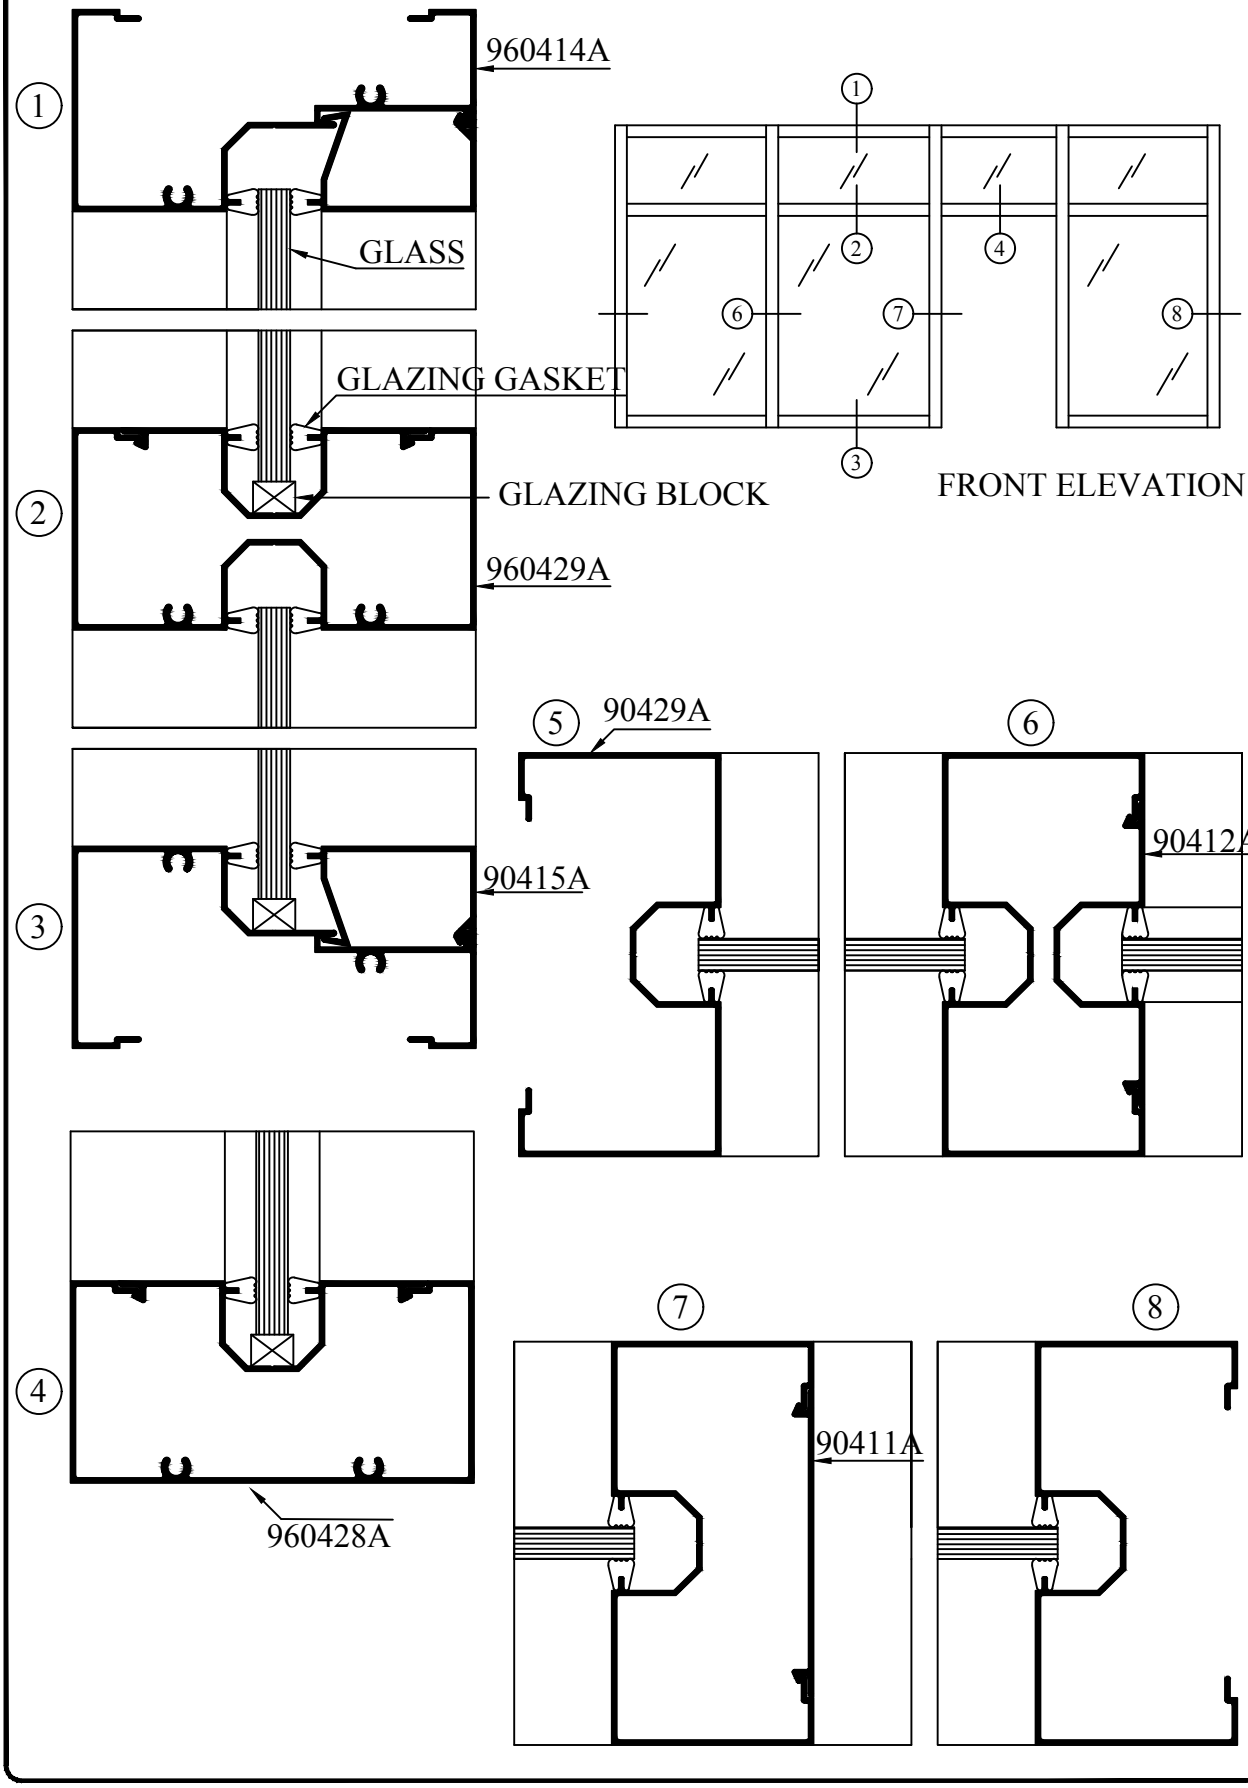


## SHOP FRONT 3" X 1.5" Group VI - 1 (1)

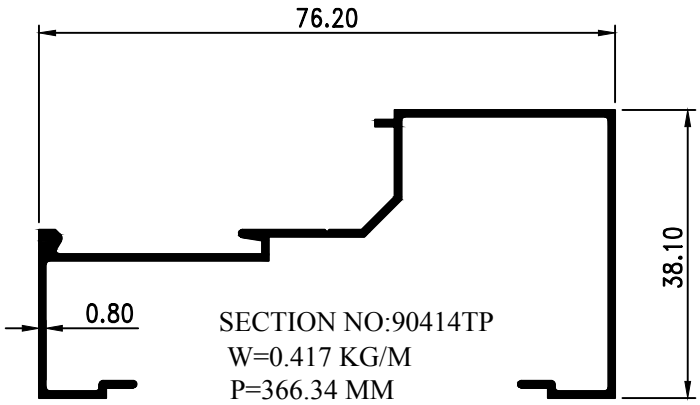


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90414 | 0.90 | 0.464 | 365.62 |
| 90414A | 1.00 | 0.511 | 364.90 |
| 90414AT | 1.15 | 0.581 | 363.82 |
| 9041TB | 1.25 | 0623 | 362.79 |
| 90414C | 1.35 | 0.666 | 361.54 |

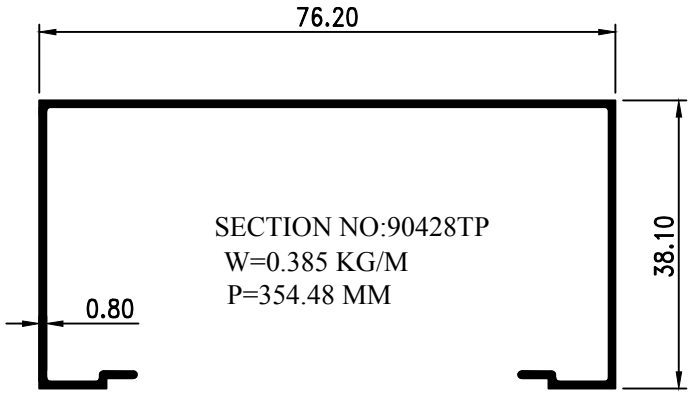



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90428 | 0.90 | 0.432 | 353.79 |
| 90428A | 1.00 | 0.479 | 353.19 |
| 90428AT | 1.15 | 0.549 | 352.08 |
| 90428TB | 1.25 | 0.592 | 351.08 |
| 90428C | 1.35 | 0.635 | 350.08 |

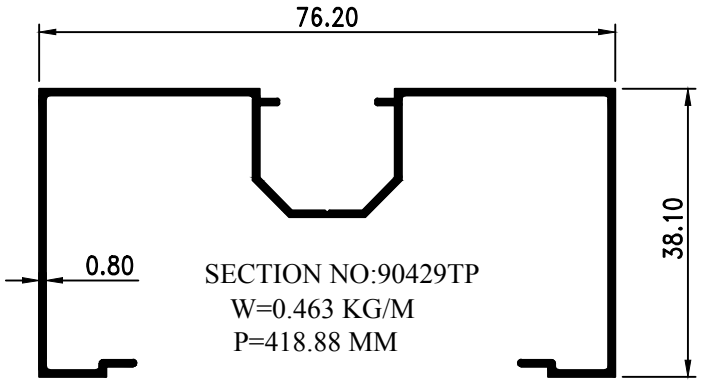



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90429 | 0.90 | 0.510 | 417.15 |
| 90429A | 1.00 | 0.566 | 416.74 |
| 90429AT | 1.15 | 0.647 | 415.36 |
| 90429TB | 1.25 | 0.698 | 414.12 |
| 90429C | 1.35 | 0.749 | 412.89 |


## SHOP FRONT 3" X 1.5 "  Group VI - 1 (2)

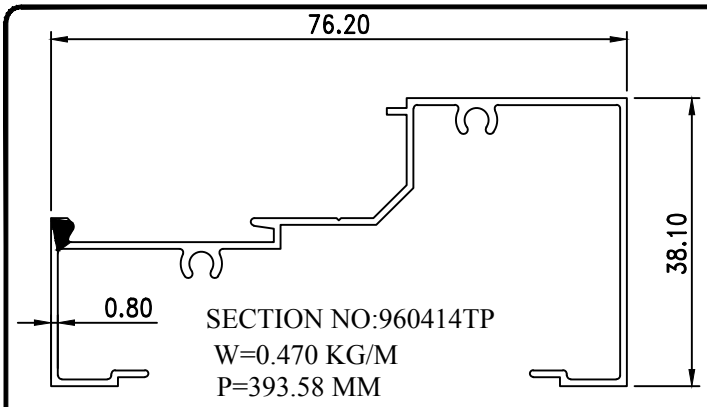


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 960414 | 0.90 | 0.520 | 390.97 |
| 960414A | 1.00 | 0.565 | 390.21 |
| 960414AT | 1.15 | 0.631 | 388.20 |
| 960414TB | 1.25 | 0.671 | 194.69 |
| 960414C | 1.35 | 0.711 | 194.69 |

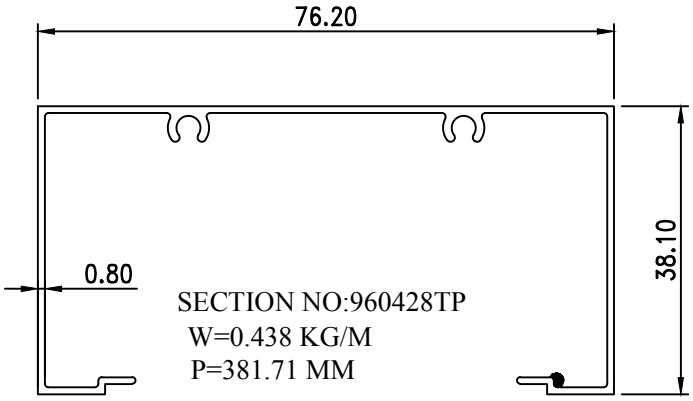



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 960428 | 0.90 | 0.489 | 379.74 |
| 960428A | 1.00 | 0.534 | 378.41 |
| 960428AT | 1.15 | 0.600 | 376.45 |
| 960428TB | 1.25 | 0.640 | 374.87 |
| 960428C | 1.35 | 0.680 | 373.30 |

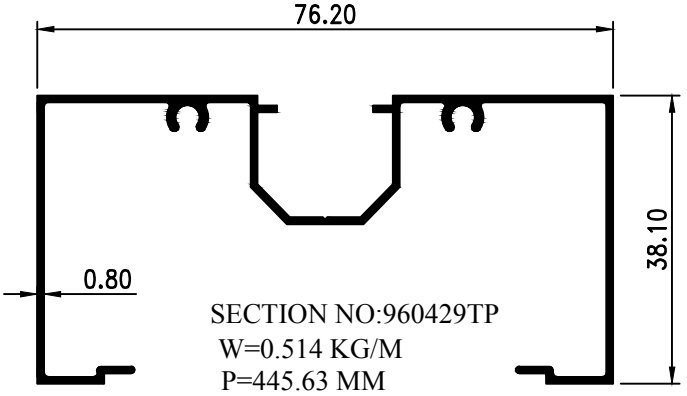



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 960429 | 0.90 | 0.567 | 443.61 |
| 960429A | 1.00 | 0.620 | 442.04 |
| 960429AT | 1.15 | 0.699 | 439.74 |
| 960429TB | 1.25 | 0.747 | 437.91 |
| 960429C | 1.35 | 0.795 | 436.11 |

## SHOP FRONT 3" X 1.5" Group VI - 1 (3)

SECTION NO:90411TP
W=0.156 KG/M
P=132.17 MM

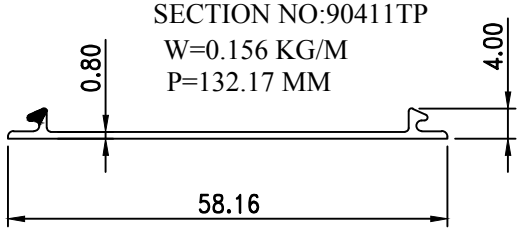



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90411 | 0.90 | 0.169 | 131.97 |
| 90411A | 1.00 | 0.182 | 131.77 |
| 90411AT | 1.15 | 0.202 | 131.47 |
| 90411TB | 1.25 | 0.215 | 131.27 |
| 90411C | 1.35 | 0.227 | 131.07 |

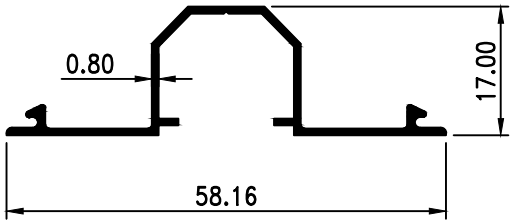


SECTION NO:90412TP
W=0.227 KG/M
P=196.78 MM


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90412 | 0.90 | 0.247 | 195.85 |
| 90412A | 1.00 | 0.268 | 194.92 |
| 90412AT | 1.15 | 0.300 | 194.76 |
| 90412TB | 1.25 | 0.322 | 194.32 |
| 90412C | 1.35 | 0.343 | 193.88 |

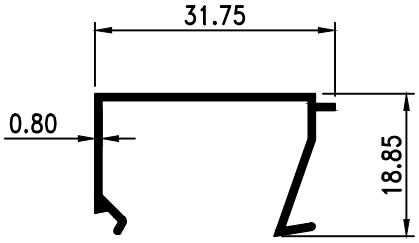



SECTION NO:90415TP
W=0.166 KG/M
P=150.11 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90415 | 0.90 | 0.184 | 149.84 |
| 90415A | 1.00 | 0.203 | 149.74 |
| 90415AT | 1.15 | 0.228 | 149.16 |
| 90415TB | 1.25 | 0.246 | 148.89 |
| 90415C | 1.35 | 0.263 | 148.62 |

## ASSEMBLY DETAIL : SHOP FRONT 4 INCH — Group VI - 2

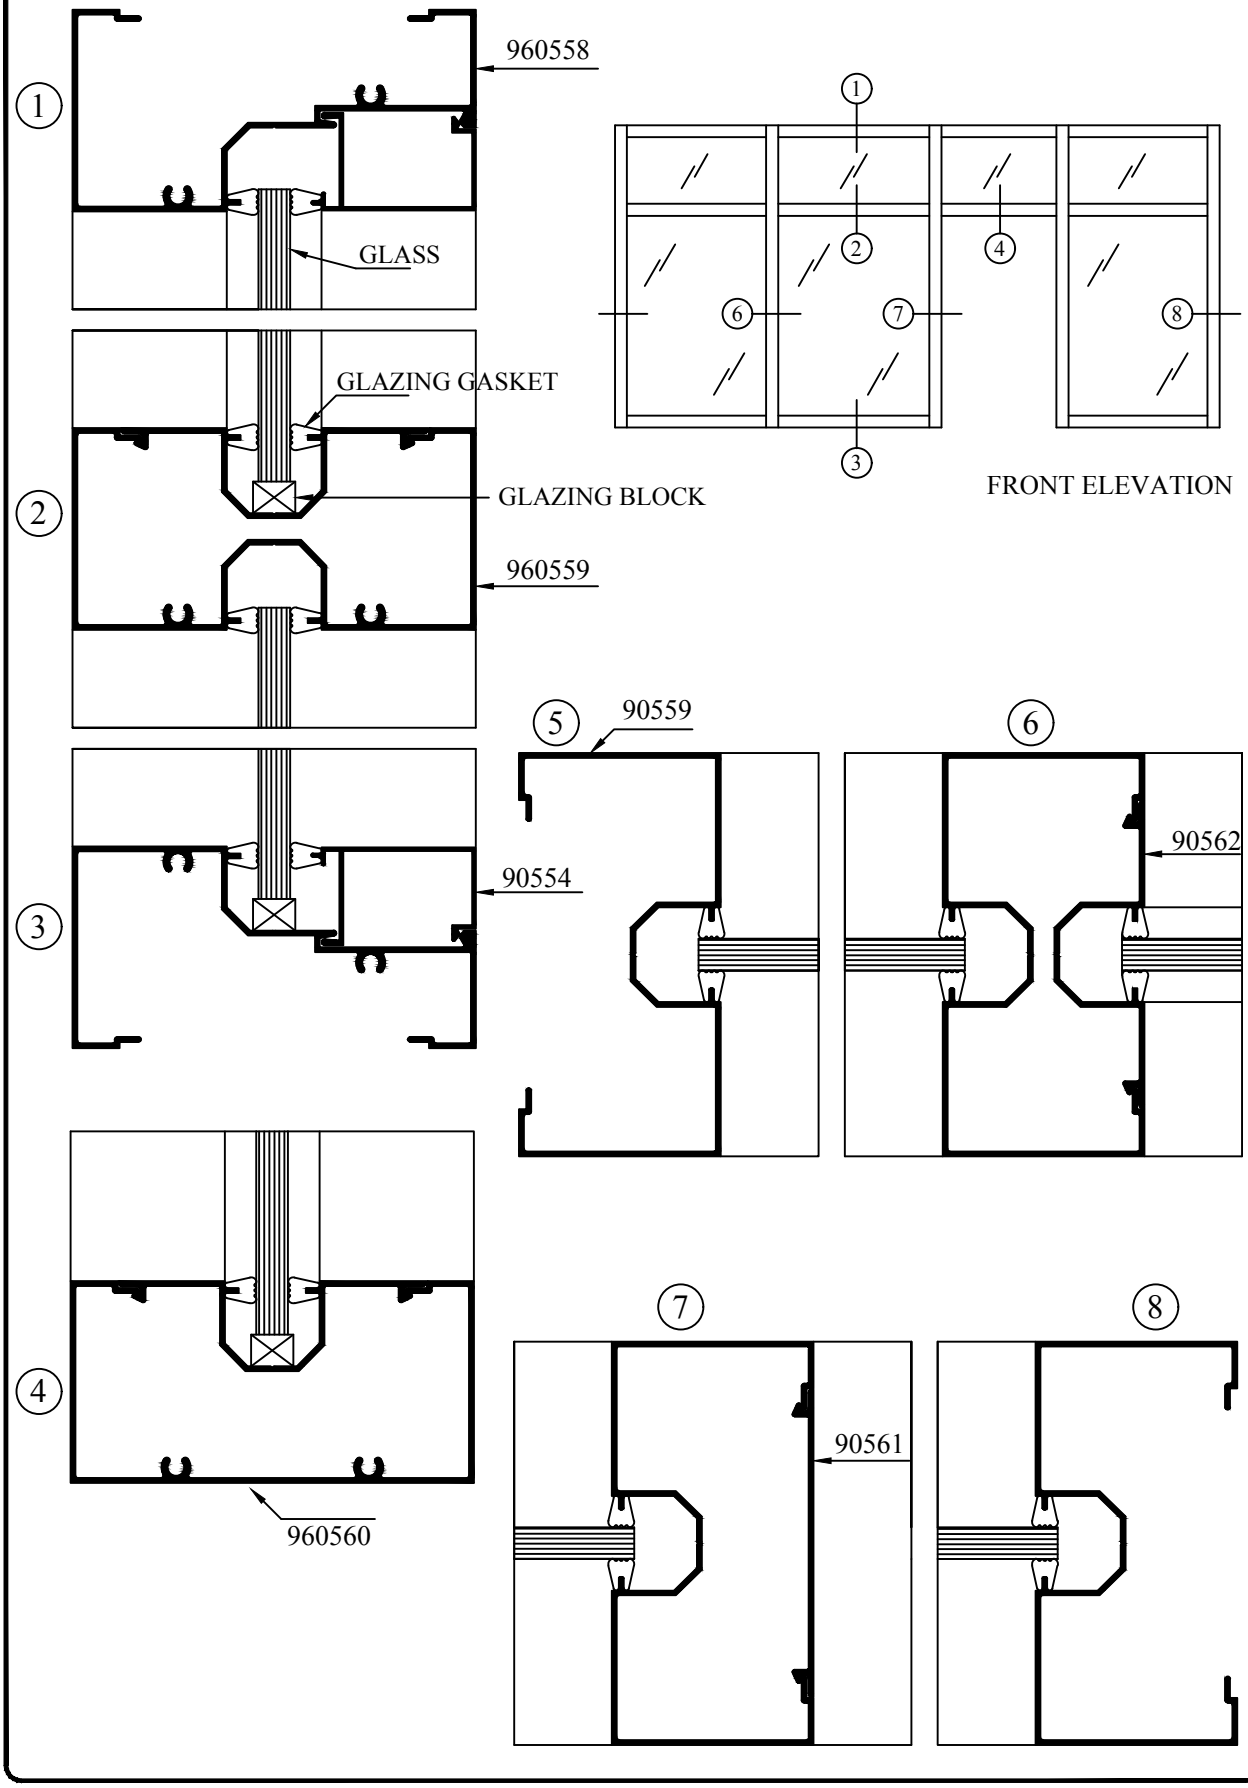


## SHOP FRONT 4" X 1.75 " Group VI - 2 (1)

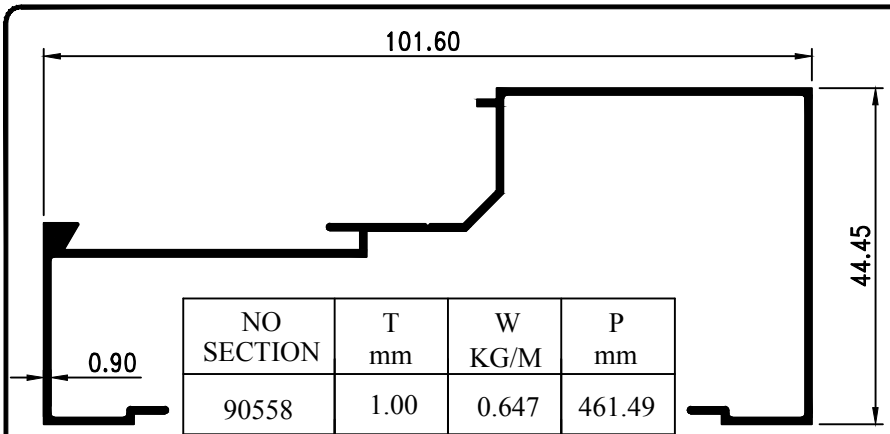



SECTION NO:90558TP
W=0.588 KG/M
P=462.21 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90558 | 1.00 | 0.647 | 461.49 |
| 90558AT | 1.15 | 0.737 | 459.58 |
| 90558TB | 1.25 | 0.794 | 458.50 |
| 90558C | 1.35 | 0.850 | 457.42 |

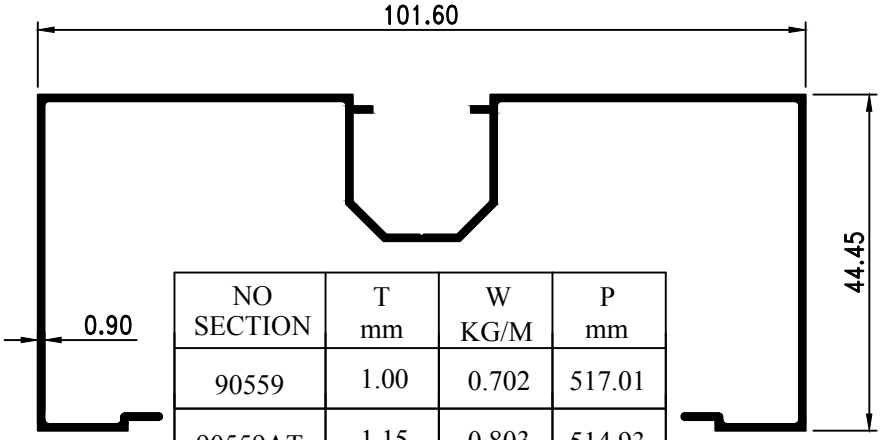


SECTION NO:90559TP
W=0.633 KG/M
P=517.77 MM


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90559 | 1.00 | 0.702 | 517.01 |
| 90559AT | 1.15 | 0.803 | 514.93 |
| 90559TB | 1.25 | 0.868 | 513.70 |
| 90559C | 1.35 | 0.933 | 512.47 |

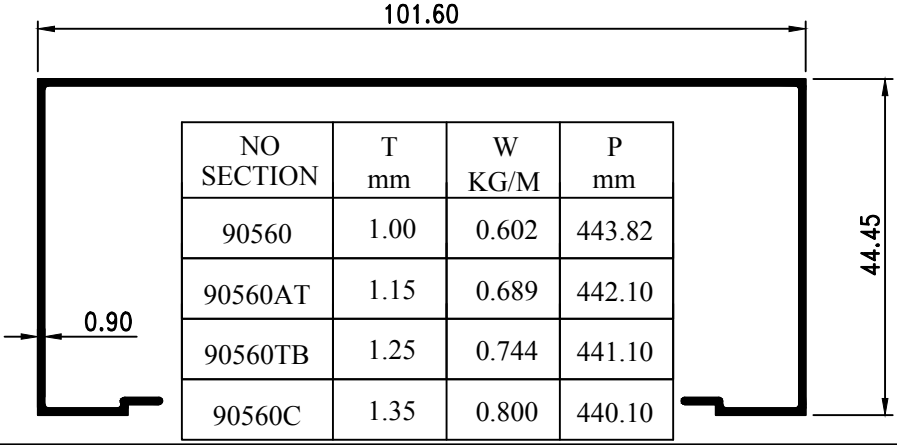


SECTION NO:90560TP
W=0.543 KG/M
P=444.51 MM


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90560 | 1.00 | 0.602 | 443.82 |
| 90560AT | 1.15 | 0.689 | 442.10 |
| 90560TB | 1.25 | 0.744 | 441.10 |
| 90560C | 1.35 | 0.800 | 440.10 |

## SHOP FRONT 4" X 1.75 "  Group VI - 2 (2)

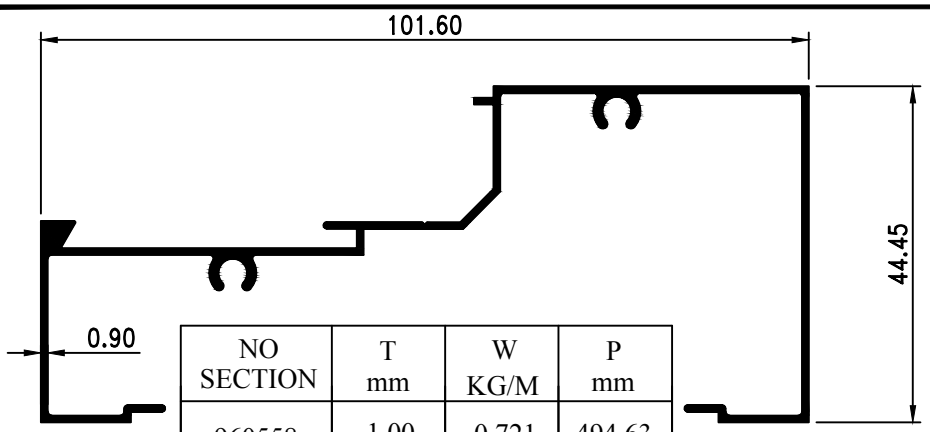



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 960558 | 1.00 | 0.721 | 494.63 |
| 960558AT | 1.15 | 0.804 | 491.01 |
| 960558TB | 1.25 | 0.858 | 489.29 |
| 960558C | 1.35 | 0.912 | 487.59 |

SECTION NO:960558TP
W=0.662 KG/M
P=495.36 MM

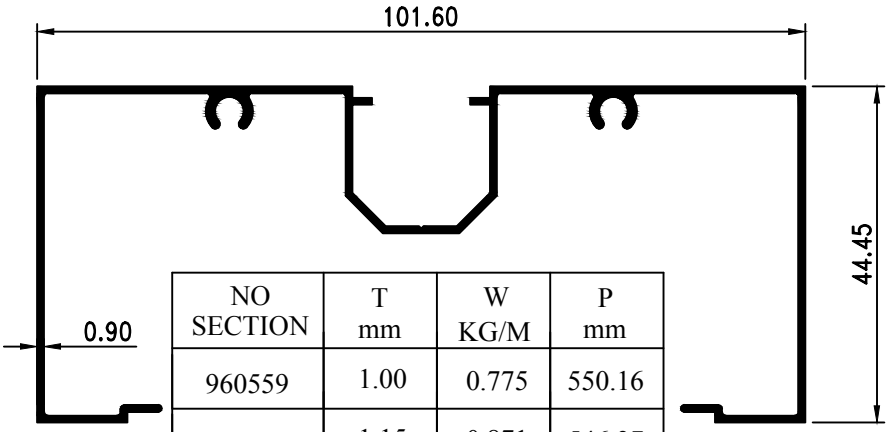


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 960559 | 1.00 | 0.775 | 550.16 |
| 960559AT | 1.15 | 0.871 | 546.37 |
| 960559TB | 1.25 | 0.933 | 544.49 |
| 960559C | 1.35 | 0.995 | 542.63 |

SECTION NO:960559TP
W=0.706 KG/M
P=550.92 MM

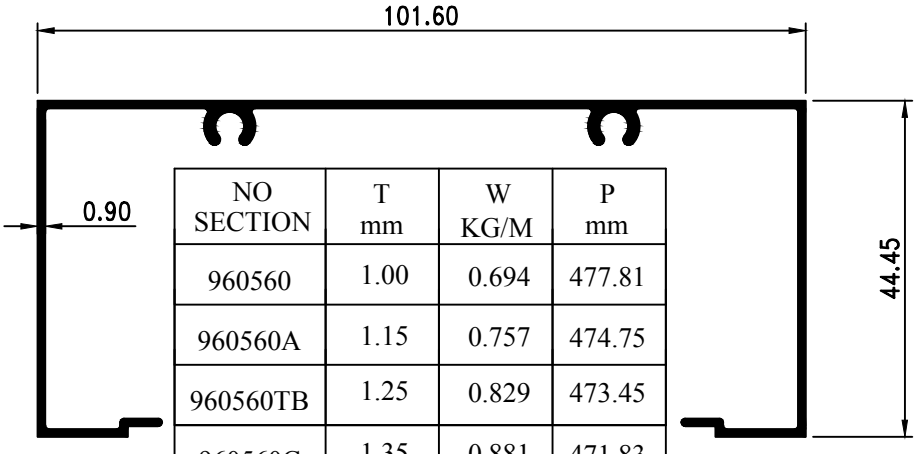



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 960560 | 1.00 | 0.694 | 477.81 |
| 960560A | 1.15 | 0.757 | 474.75 |
| 960560TB | 1.25 | 0.829 | 473.45 |
| 960560C | 1.35 | 0.881 | 471.83 |


SECTION NO:960560TP
W=0.635 KG/M
P=478.50 MM

## SHOP FRONT 4" X 1.75 " Group VI - 2 (3)

SECTION NO:90561TP
W=0.222 KG/M
P=171.26 MM

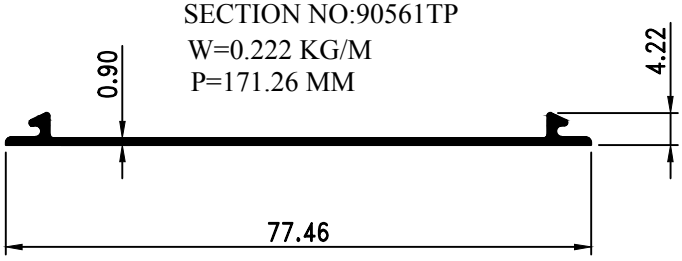



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90561 | 1.00 | 0.243 | 171.46 |
| 90561AT | 1.15 | 0.266 | 170.76 |
| 90561TB | 1.25 | 0.284 | 170.56 |
| 90561C | 1.35 | 0.302 | 170.36 |

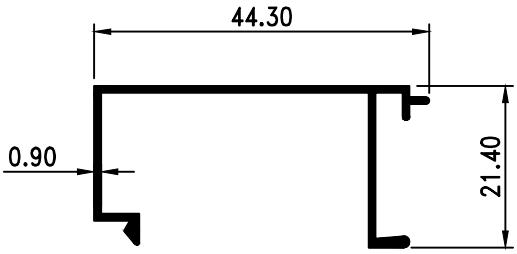



SECTION NO:90554ATP
W=0.248 KG/M
P=196.80 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90554 | 1.00 | 0.271 | 196.11 |
| 90554AT | 1.15 | 0.306 | 194.98 |
| 90554TB | 1.25 | 0.329 | 194.40 |
| 90554C | 1.35 | 0.351 | 193.71 |

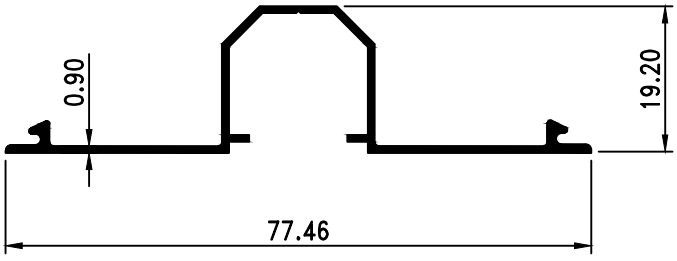



SECTION NO:90562TP
W=0.313 KG/M
P=244.98 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 90562 | 1.00 | 0.342 | 244.65 |
| 90562AT | 1.15 | 0.378 | 242.20 |
| 90562TB | 1.25 | 0.405 | 241.77 |
| 90562C | 1.35 | 0.432 | 241.33 |





SECTION NO:9000
W=0.099 KG/M
P=68.99 MM


## ASSEMBLY DETAIL : SWING DOOR — Group VII - 1

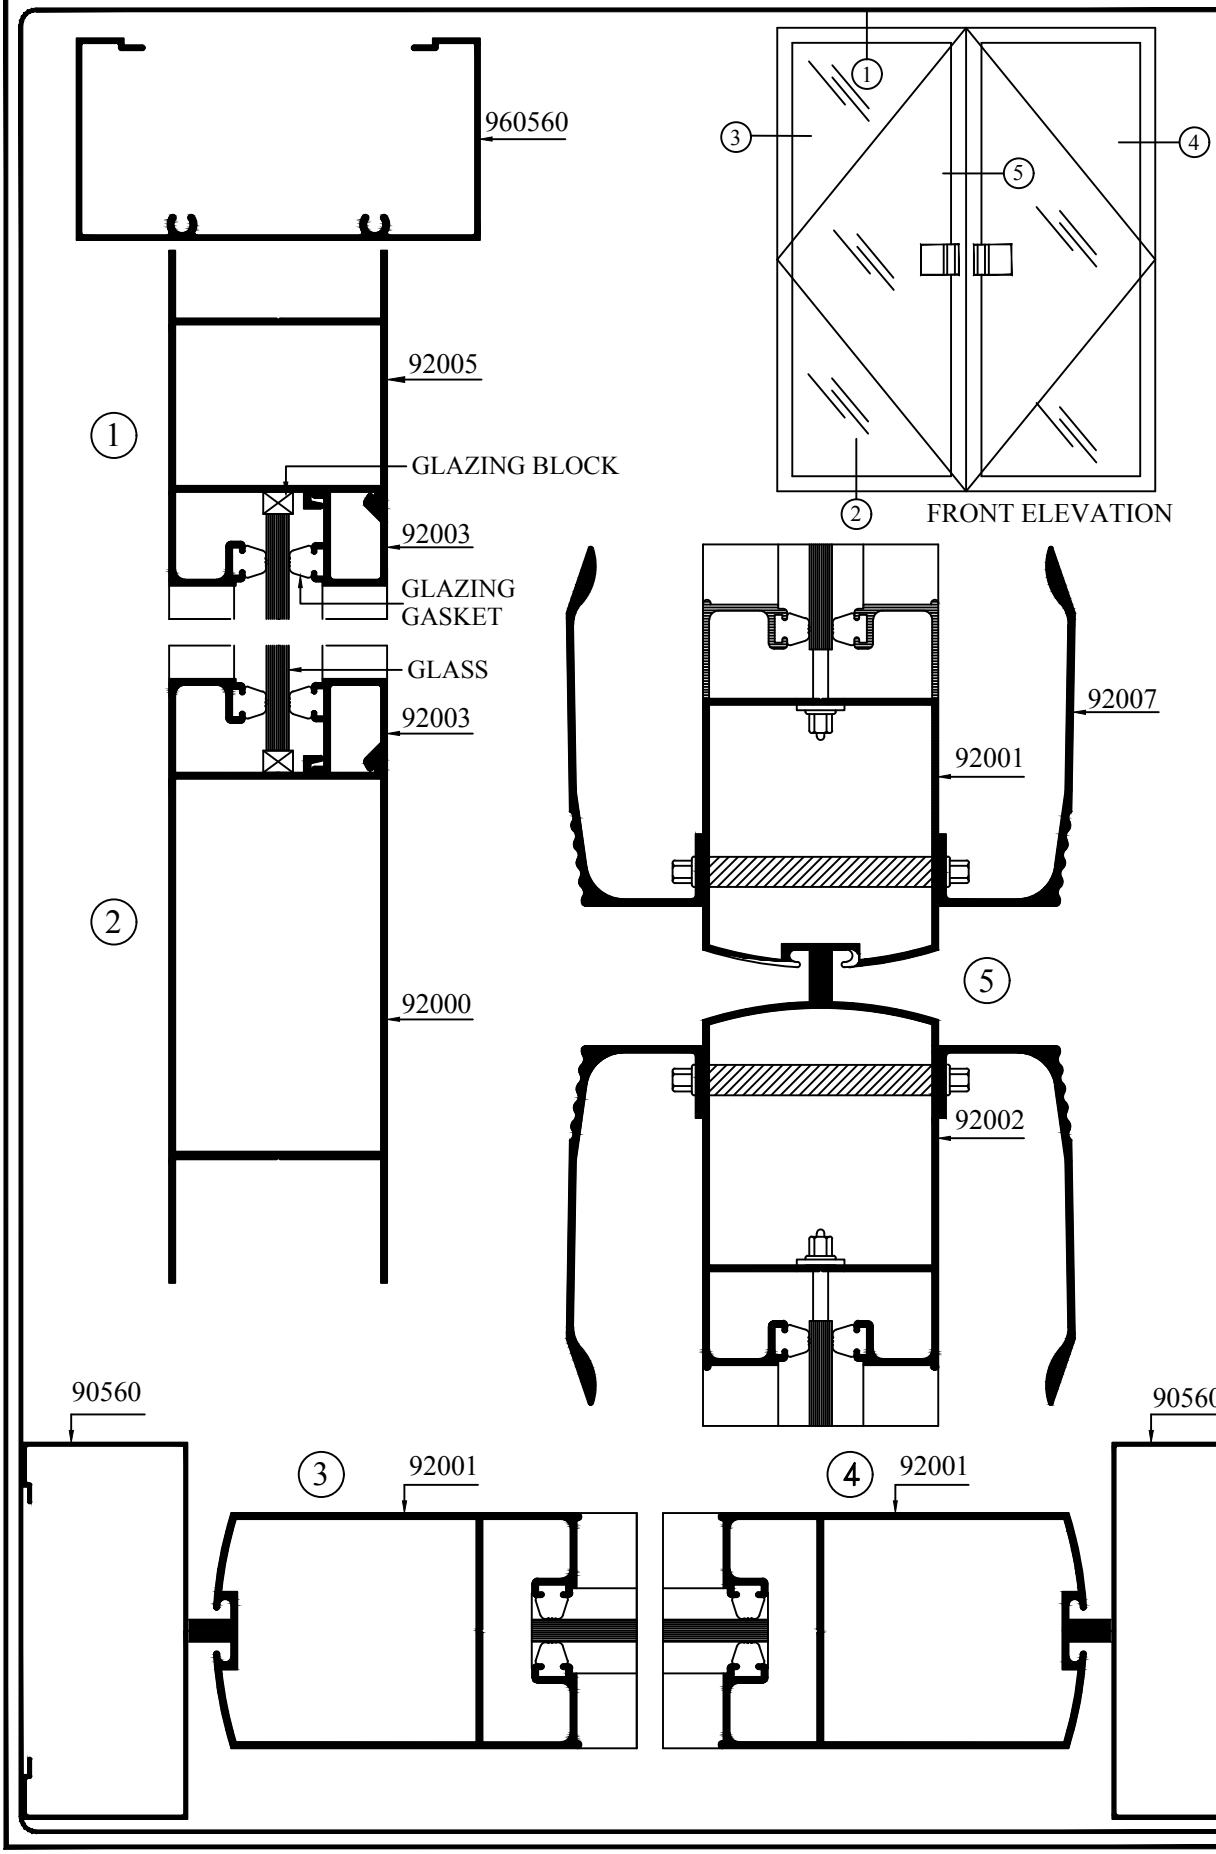


## SWING DOOR — Group VII - 1 (1)

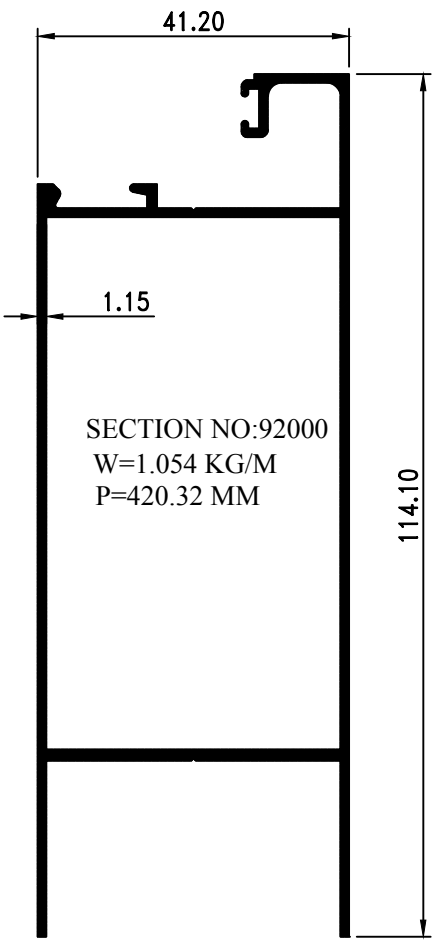



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 92000A | 1.00 | 0.895 | 420.92 |

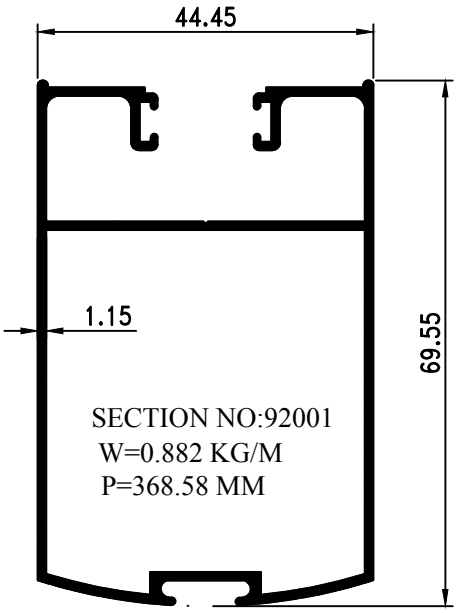


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 92001A | 1.05 | 0.815 | 369.321 |






| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 92003A | 1.05 | 0.154 | 111.34 |

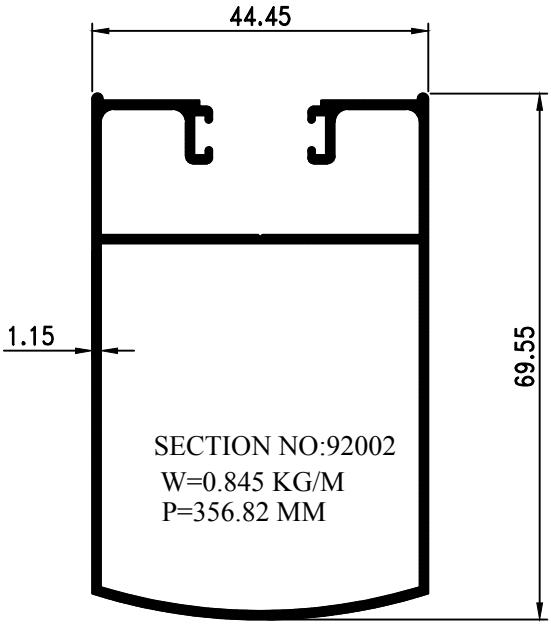



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 92002A | 1.05 | 0.779 | 357.62 |

SWING DOOR Group VII - 1 (2)

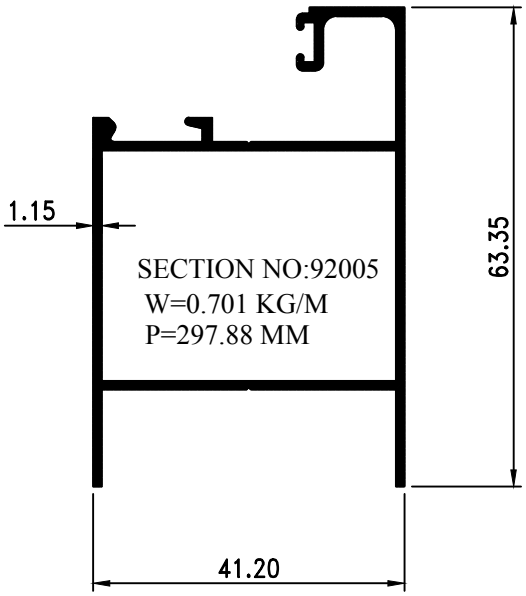


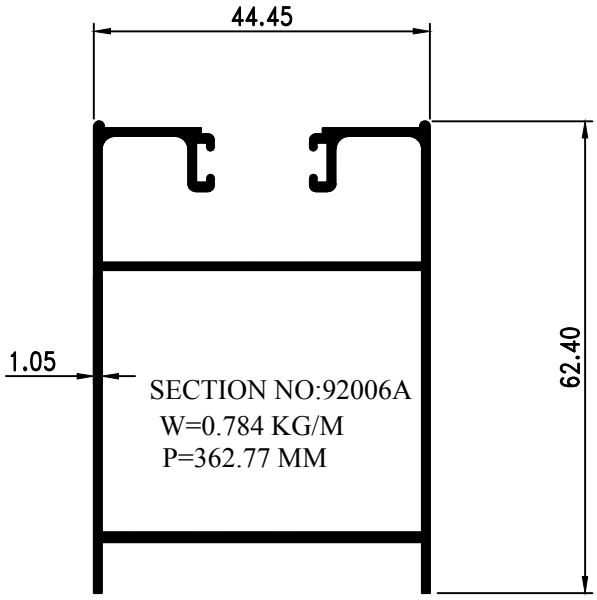

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 92005A | 1.05 | 0.647 | 298.28 |

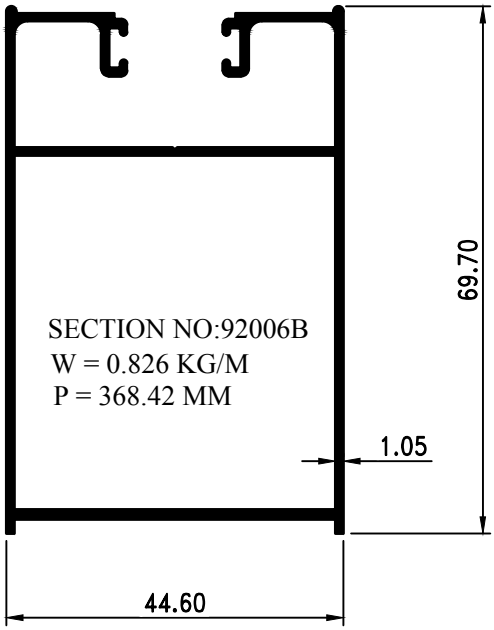


SWING DOOR Group VII - 1 (3)

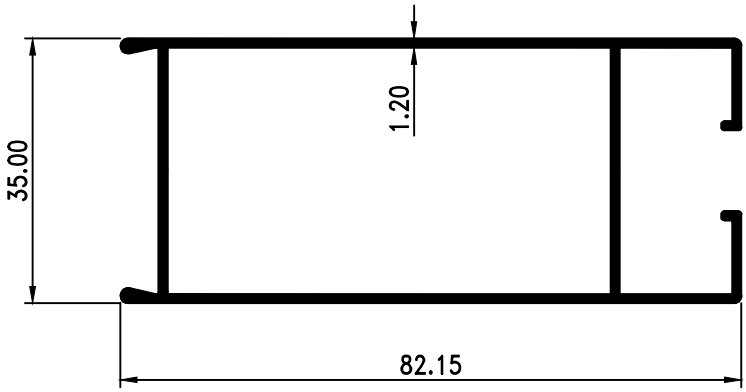


SECTION NO:99060
W=0.836 KG/M
P=324.11 MM

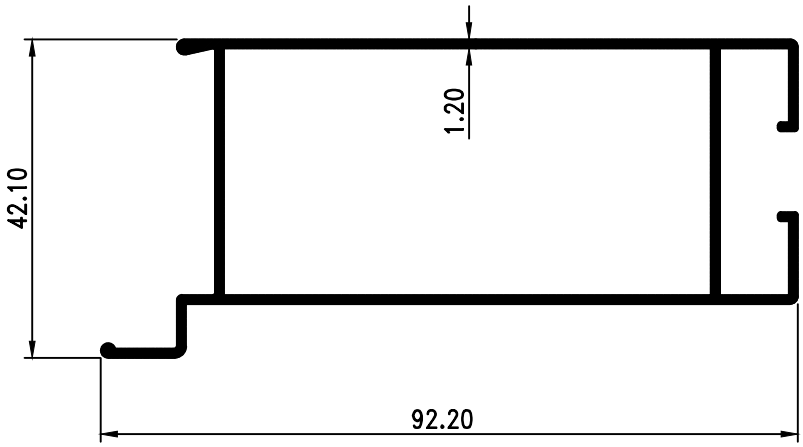




SECTION NO:99061
W=0.887 KG/M
P=345.91 MM

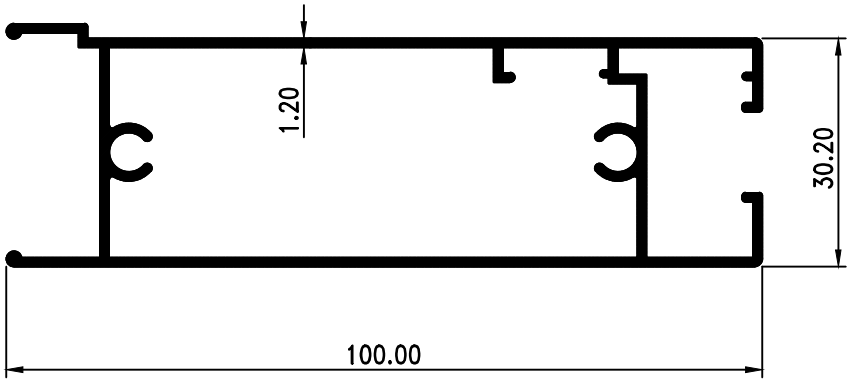



SECTION NO:99062
W=1.028 KG/M
P=368.27 MM


SWING DOOR Group : VII - 1 (4)

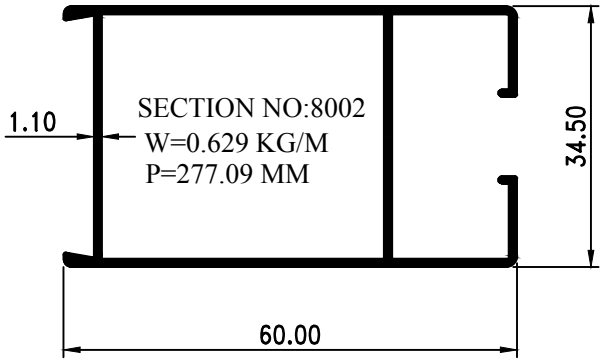


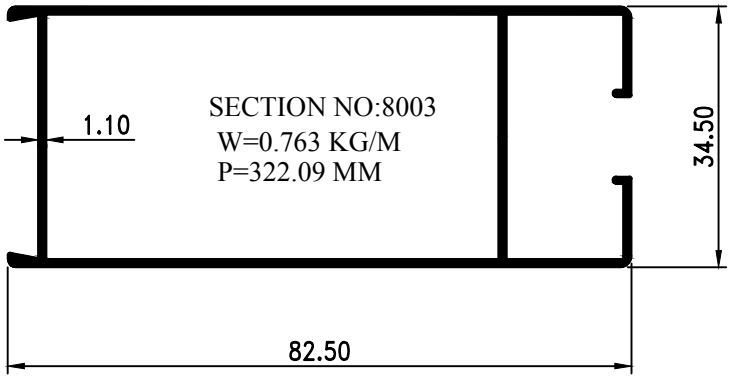


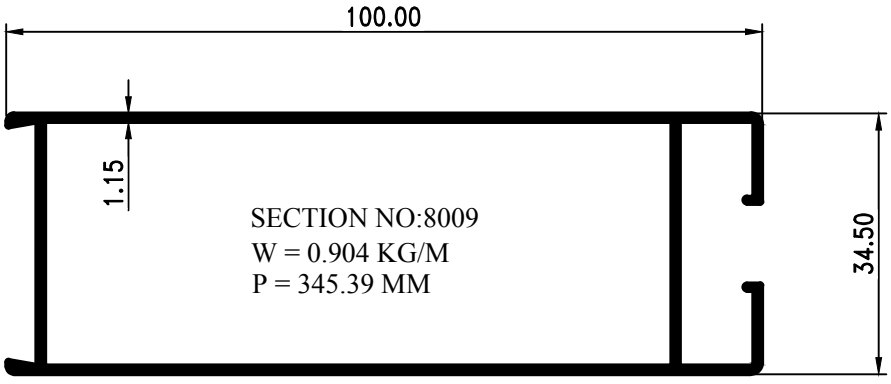
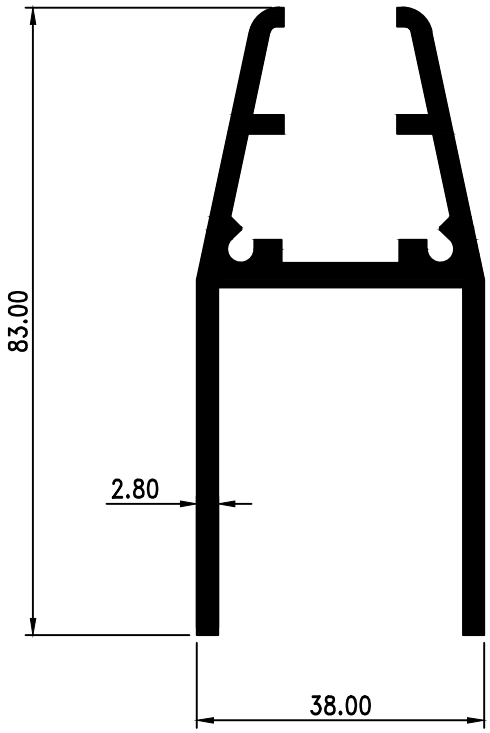
SWING DOOR Group : VII - 1 (5)



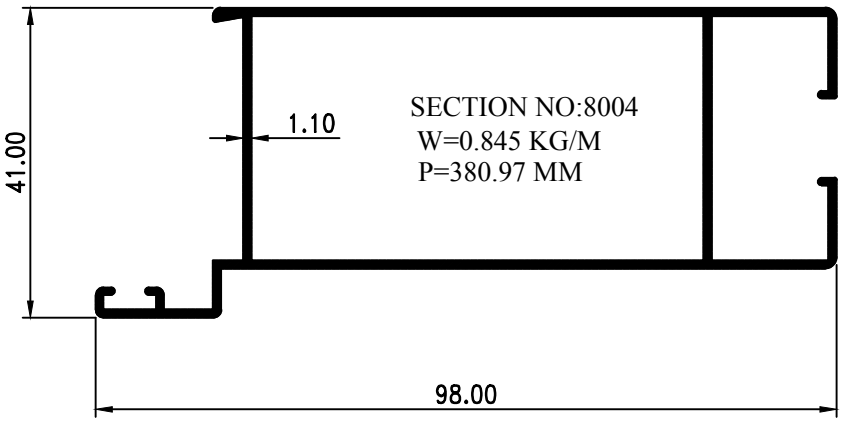


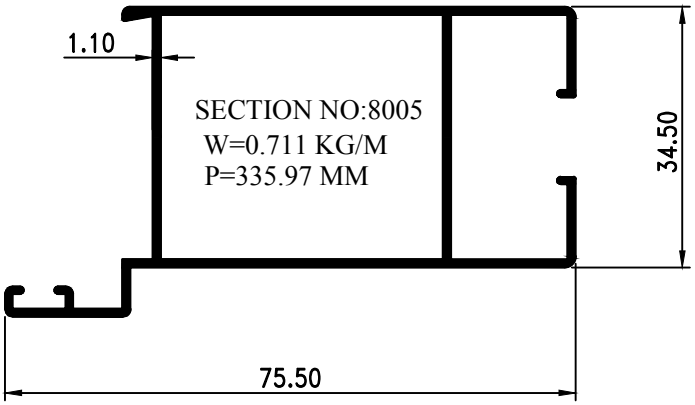
FRAME LESS SECTION Group : VII - 1 (6)

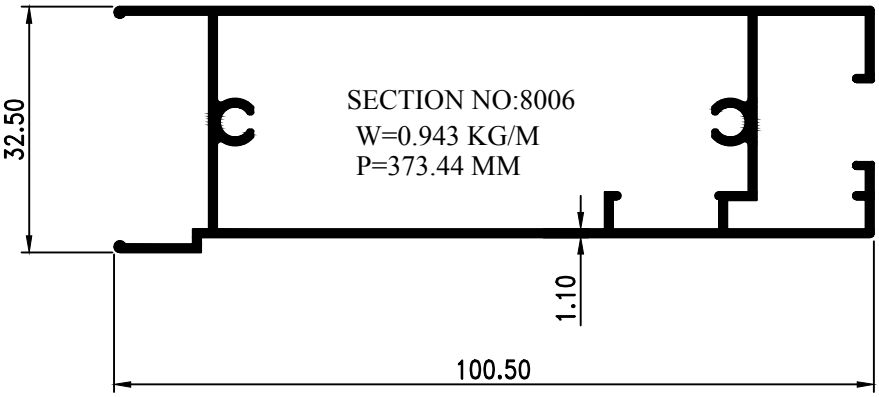



SECTION NO:0109
W=1.681 KG/M
P=434.21 MM


DOOR HANDLE Group : VII - 1 (7)

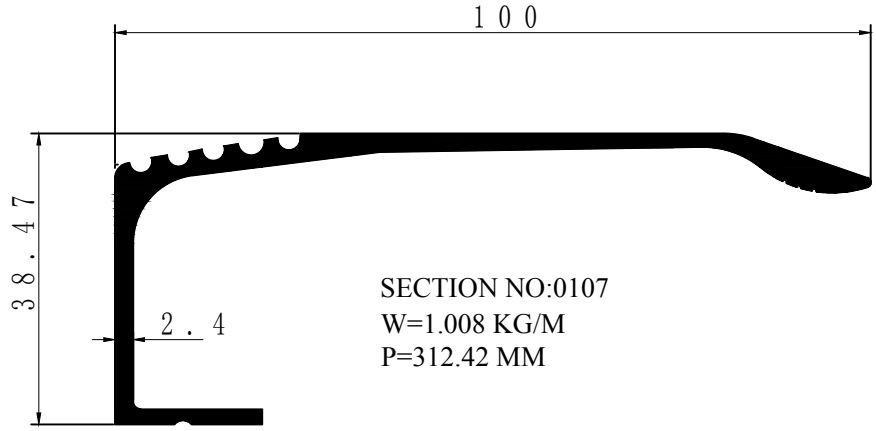



SECTION NO:0107
W=1.008 KG/M
P=312.42 MM

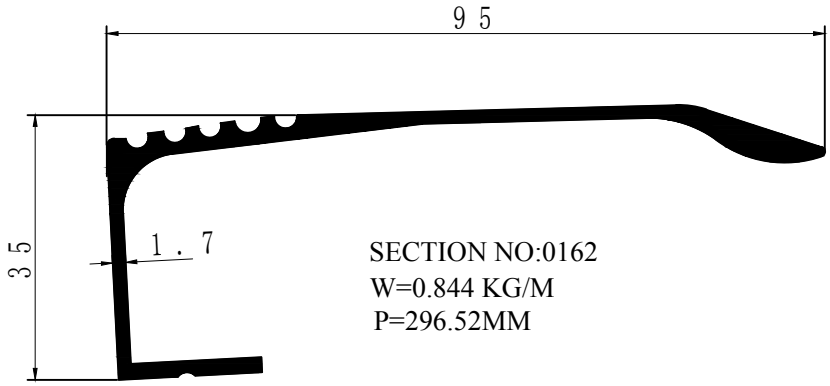


SECTION NO:0162
W=0.844 KG/M
P=296.52MM

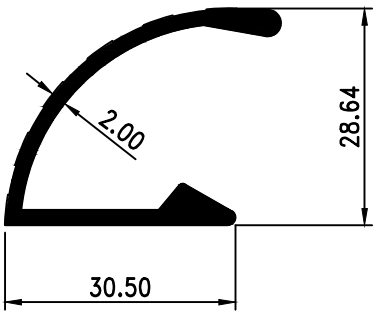



SECTION NO:0108
W=0.489 KG/M
P=165.90 MM

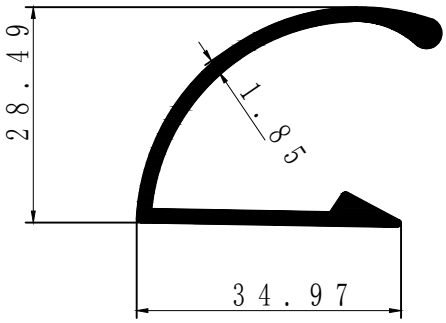



SECTION NO:0161
W=0.495 KG/M
P=181.60 MM


DOOR'S OTHERS Group : VII - 1 (8)

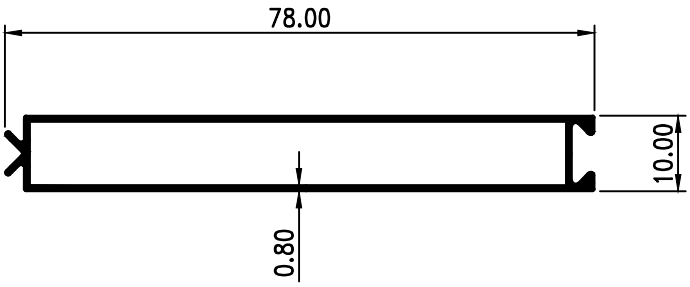


SECTION NO:0116
W=0.395 KG/M
P=189.89 MM

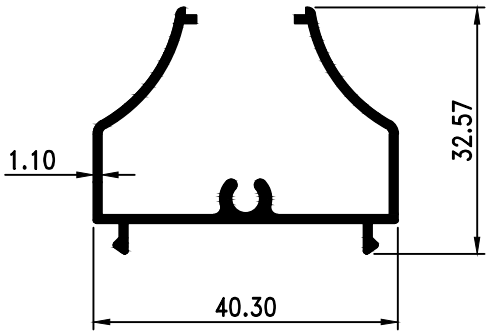




SECTION NO:0118
W=0.383 KG/M
P=242.63 MM

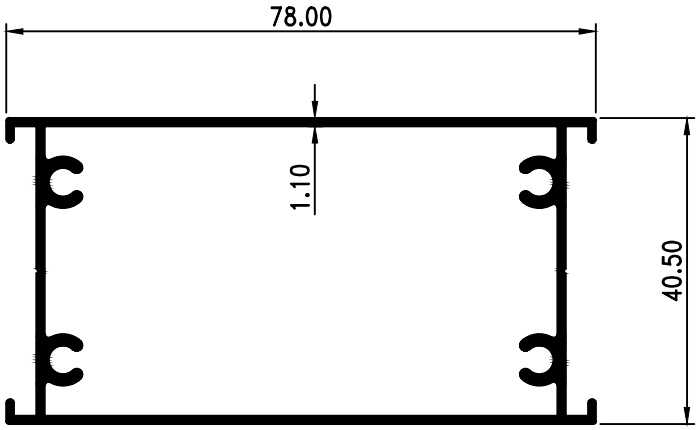



SECTION NO:0115
W=0.904 KG/M
P=268.69 MM

# ASSEMBLY DETAIL : SLIDING DOOR Group VII - 2

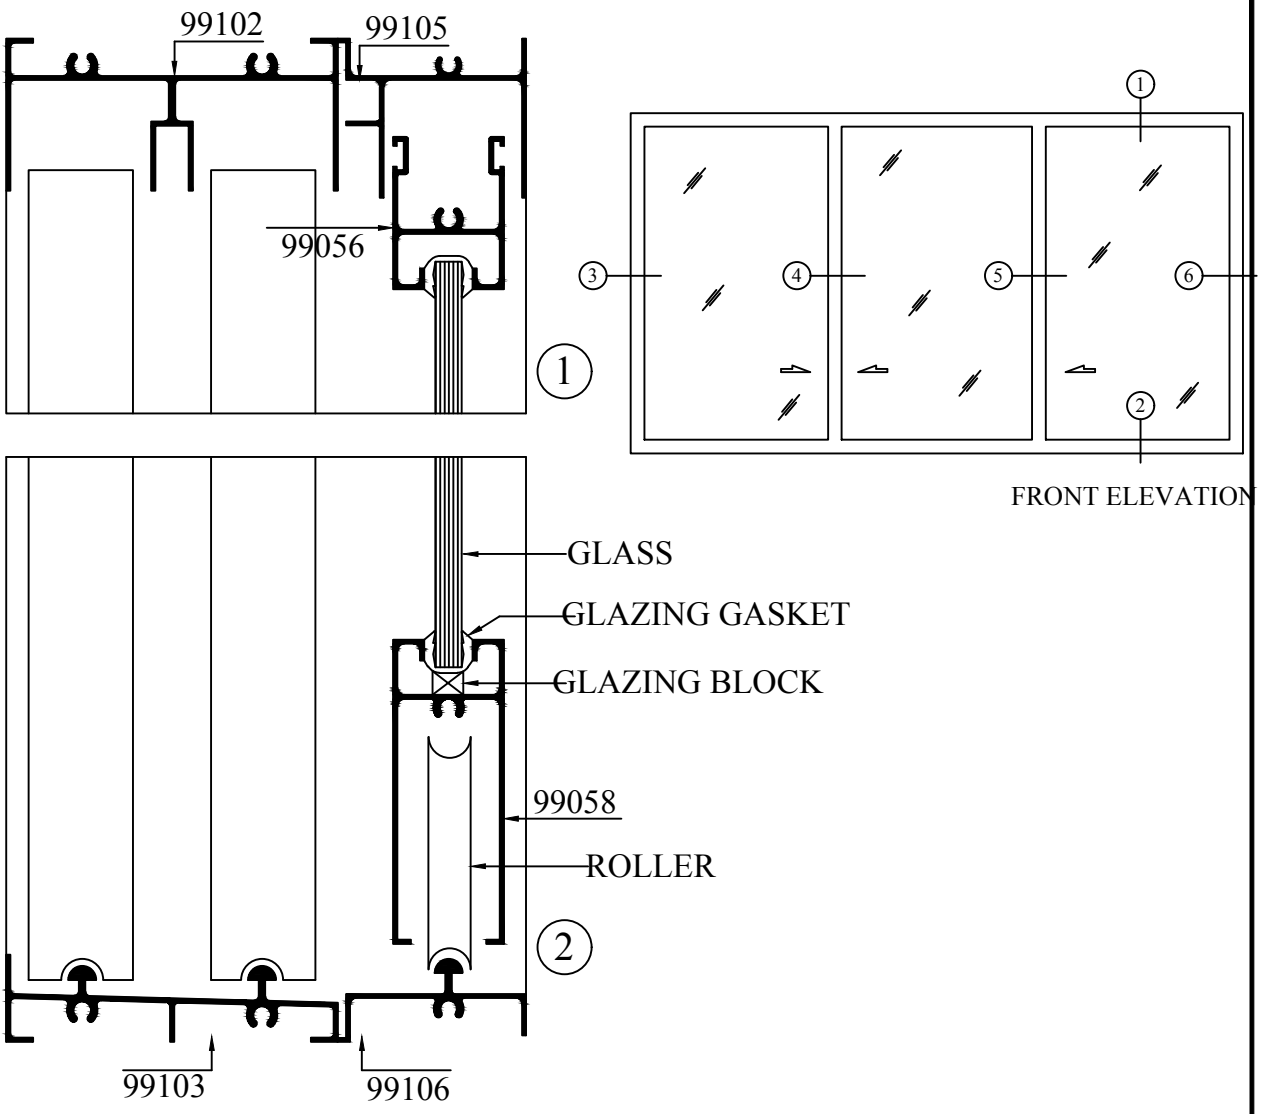

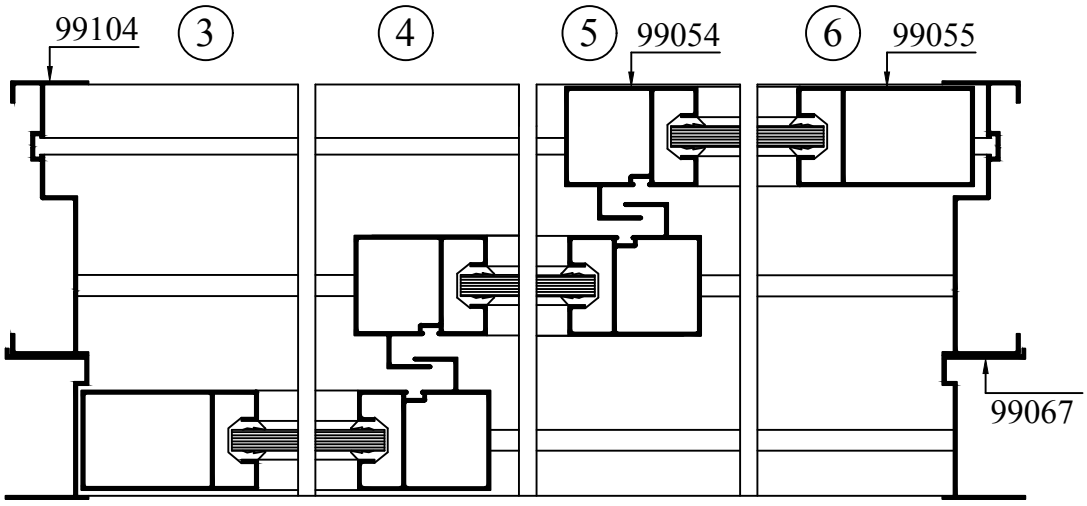



SLIDING DOOR Group VII - 2 (1)

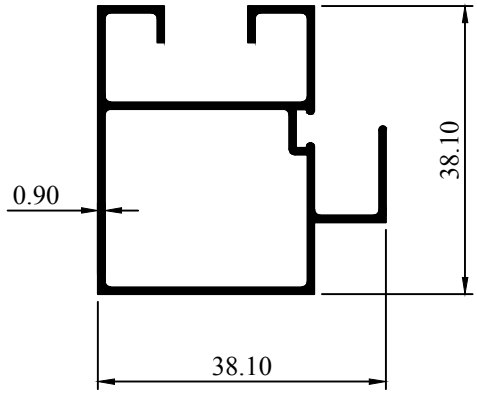



SECTION NO:99054TP
W=0.438 KG/M
P=252.03MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 99054 | 0.80 | 0.392 | 253.99 |

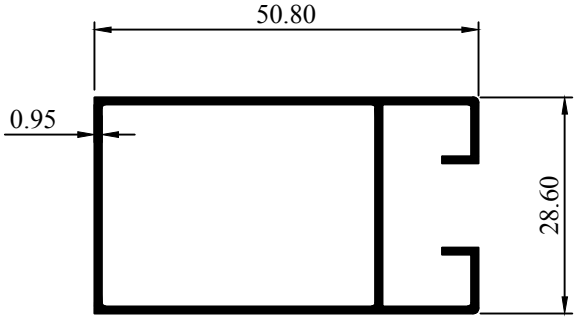



SECTION NO:99055
W=0.459 KG/M
P=229.73 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 99055T | 0.80 | 0.389 | 230.93 |
| 99055TP | 0.90 | 0.436 | 230.13 |

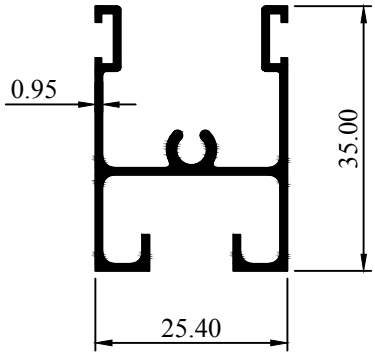


SECTION NO:99056
W=0.376 KG/M
P=267.22 MM


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 99056TP | 0.90 | 0.361 | 267.92 |

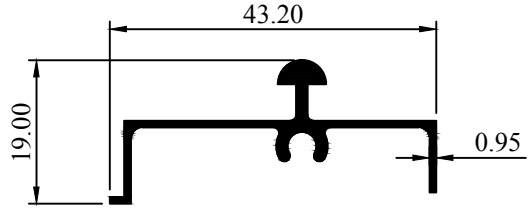


SECTION NO:99106
W=0.269 KG/M
P=160.87 MM


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 99106TP | 0.90 | 0.261 | 161.13 |

SLIDING DOOR Group VII - 2 (2)

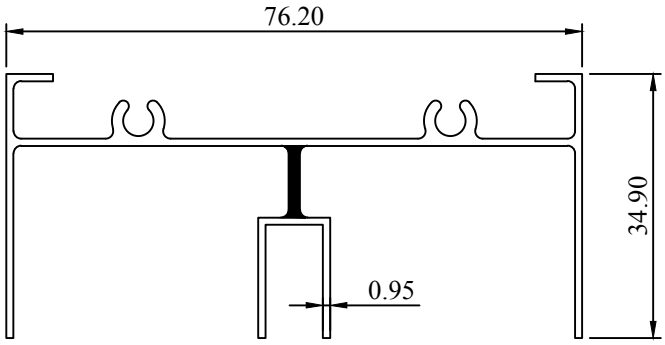



SECTION NO:99102
W=0.642 KG/M
P=437.06 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 99102TP | 0.90 | 0.617 | 437.56 |

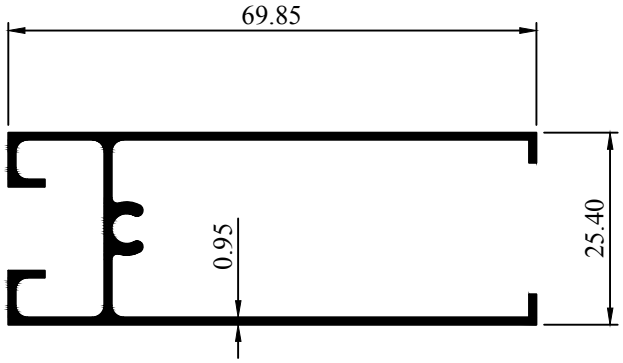



SECTION NO:99058
W=0.536 KG/M
P=388.57 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 99058TP | 0.90 | 0.511 | 389.27 |

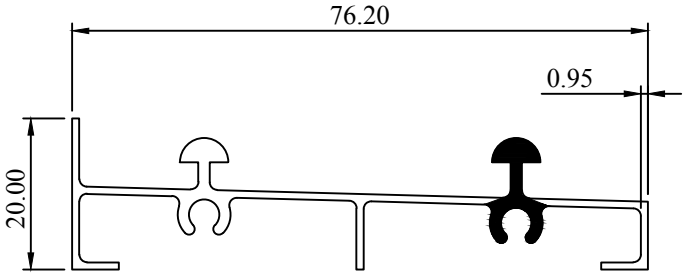


SECTION NO:99103
W=0.542 KG/M
P=320.20 MM


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 99103TP | 0.90 | 0.528 | 320.88 |

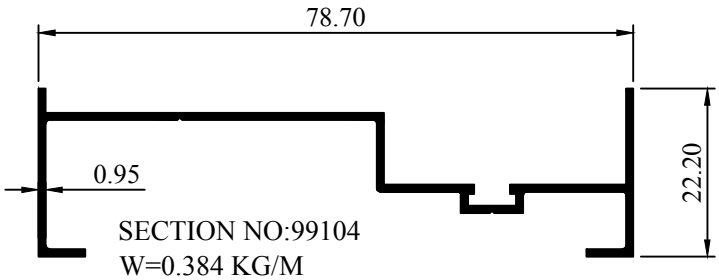


SECTION NO:99104
W=0.384 KG/M
P=297.46 MM


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 99104TP | 0.90 | 0.364 | 297.76 |

## SLIDING DOOR Group VII - 2 (3)

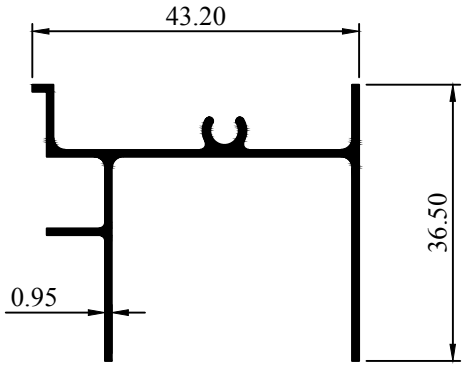



SECTION NO:99105
W=0.351 KG/M
P=256.01 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 99105TP | 0.90 | 0.336 | 256.37 |

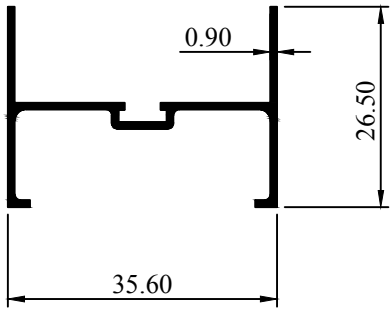



SECTION NO:99108
W=0.254 KG/M
P=193.28MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 99108TP | 0.90 | 0.241 | 193.58 |

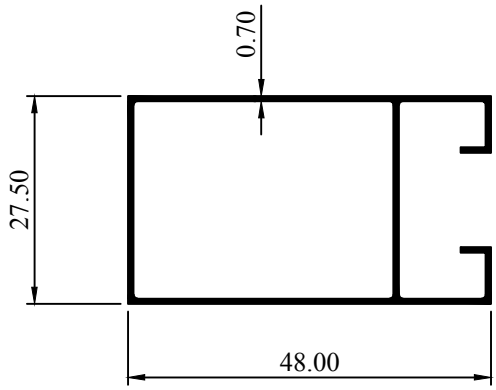



SECTION NO:99055A
W=0.321 KG/M
P=214.94 MM

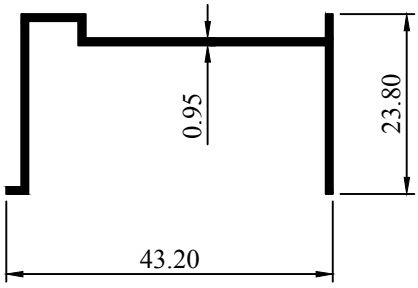


SECTION NO:99068
W=0.237 KG/M
P=186.10 MM


## ASSEMBLY DETAIL : ROLLING DOOR


Group VII - 3

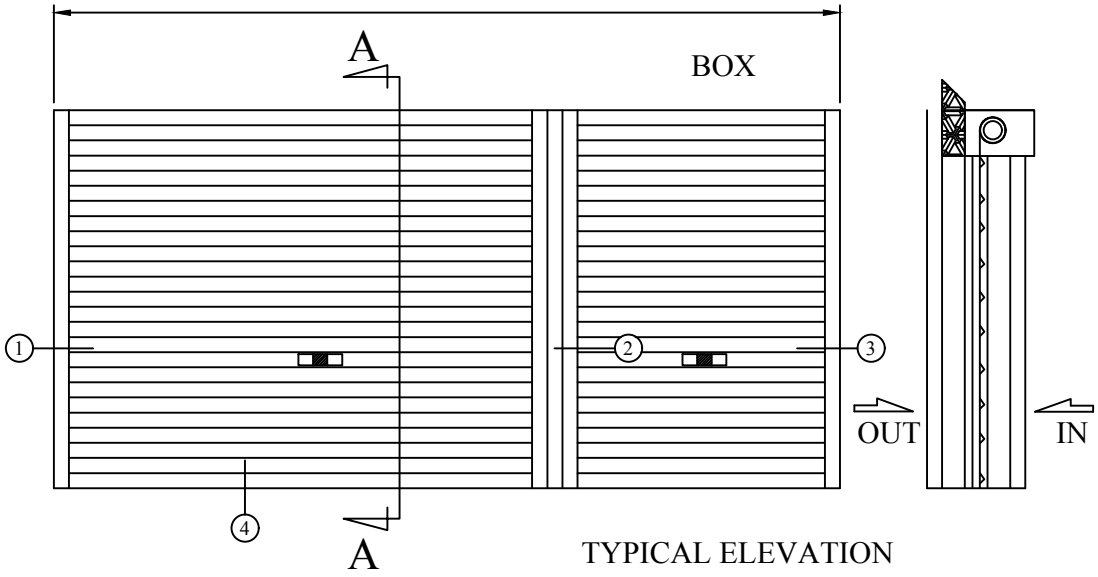


TYPICAL ELEVATION


SECTION A-A

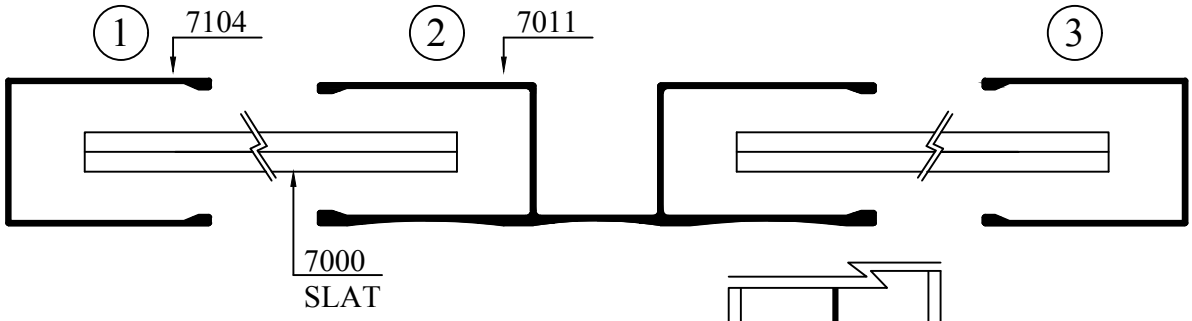

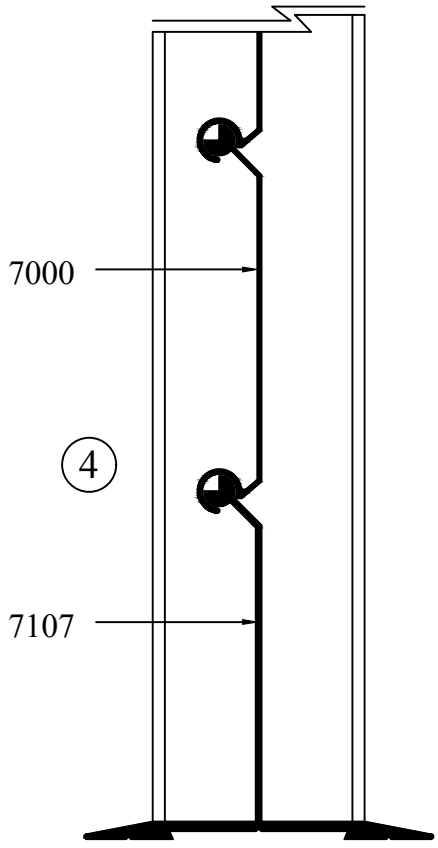



## ROLLING DOOR


Group VII - 3 (1)

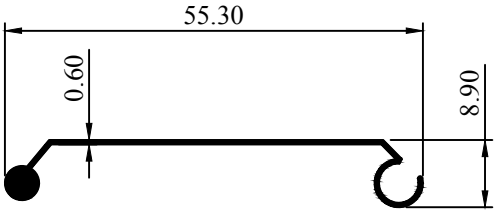



SECTION NO:7007
W=0.151 KG/M
P=146.27 MM

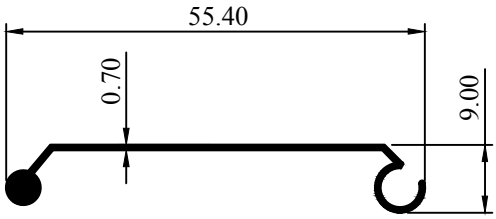



SECTION NO:7113
W=0.169 KG/M
P=146.10 MM

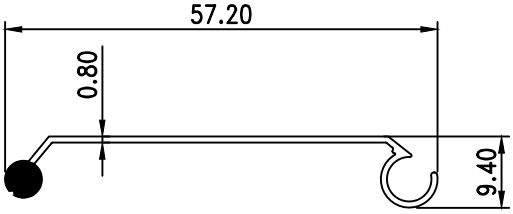



SECTION NO:70012
W=0.198 KG/M
P=150.46 MM

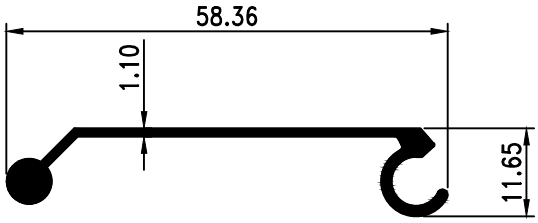



SECTION NO:70013
W=0.319 KG/M
P=159.07 MM

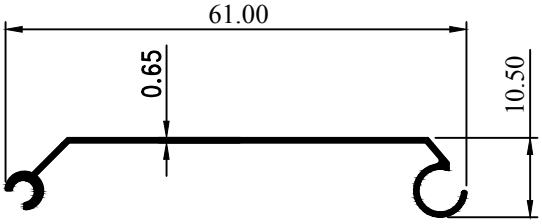



SECTION NO:7003
W=0.158 KG/M
P=166.95 MM

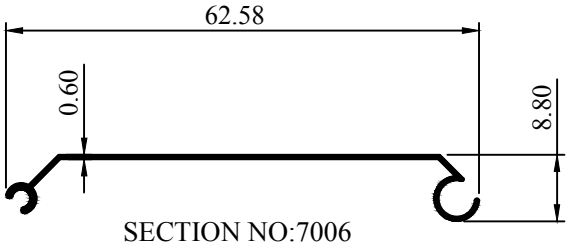


SECTION NO:7006
W=0.136 KG/M
P=161.17 MM

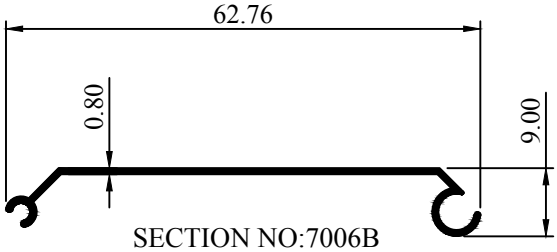



SECTION NO:7006B
W=0.175 KG/M
P=160.88 MM

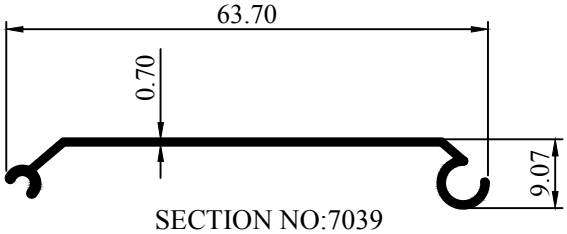



SECTION NO:7039
W = 0.162 KG/M
P = 161.28 MM

## ROLLING DOOR


Group VII - 3 (2)

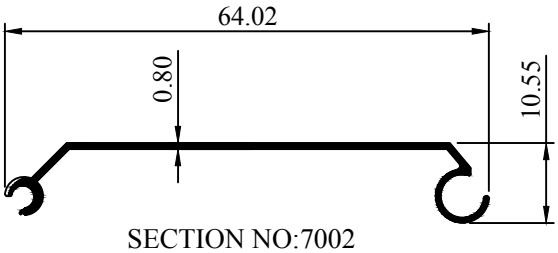



SECTION NO:7002
W=0.190 KG/M
P=172.37 MM

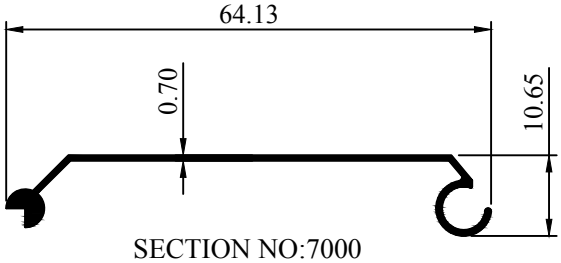



SECTION NO:7000
W=0.191 KG/M
P=169.95 MM

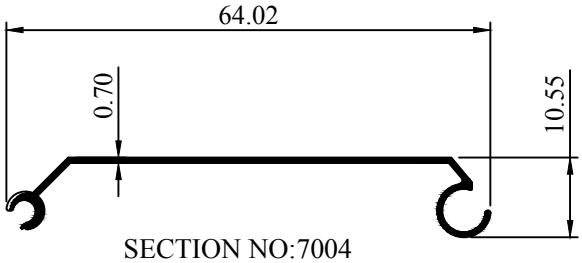


SECTION NO:7004
W=0.173 KG/M
P=172.82 MM

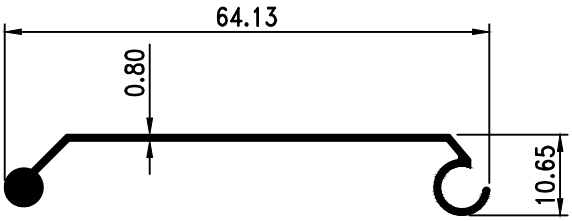



SECTION NO:7011
W=0.221 KG/M
P=168.62 MM

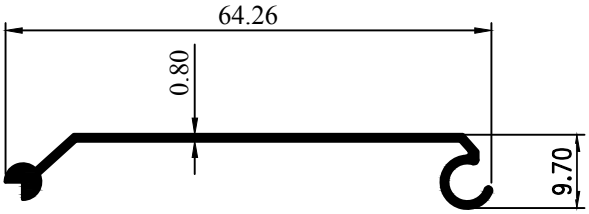



SECTION NO:7040
W = 0.199 KG/M
P = 166.26 MM

## ROLLING DOOR


Group VII - 3 (3)

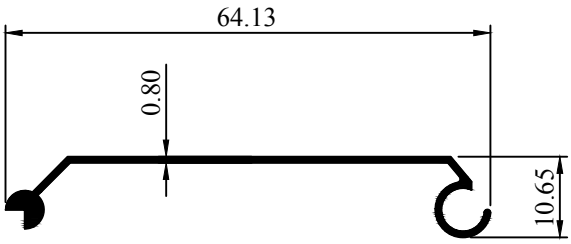



SECTION NO:7001
W=0.207 KG/M
P=169.69 MM

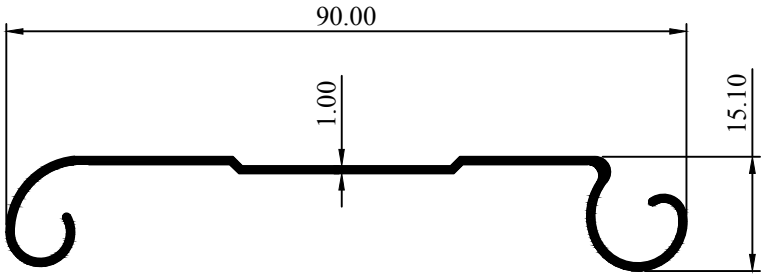



SECTION NO:7100
W=0.365 KG/M
P=268.12 MM

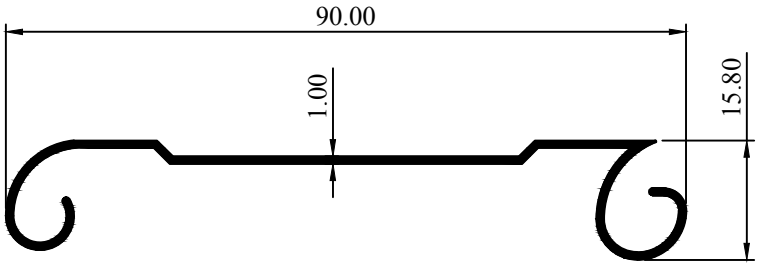



SECTION NO:7101
W=0.382 KG/M
P=283.47 MM

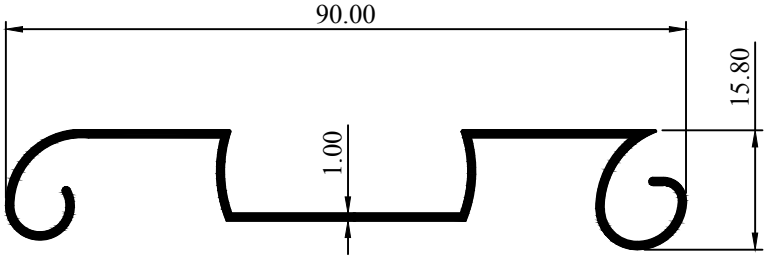


SECTION NO:7102
W=0.436 KG/M
P=323.03 MM

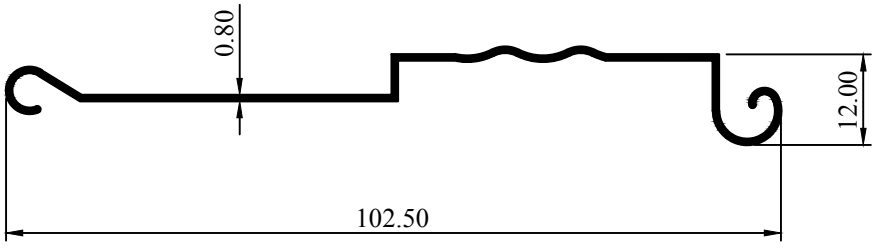



SECTION NO:7111
W=0.291 KG/M
P=269.93 MM

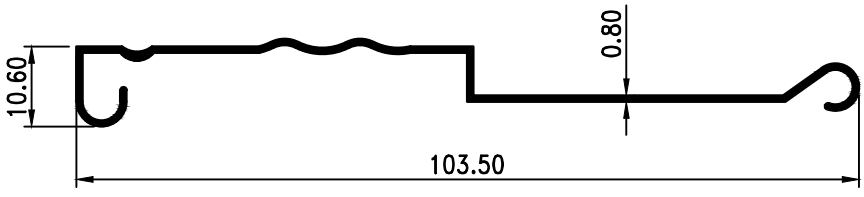



SECTION NO:7112
W=0.299 KG/M
P=274.64 MM


## ROLLING DOOR Group VII - 3 (4)

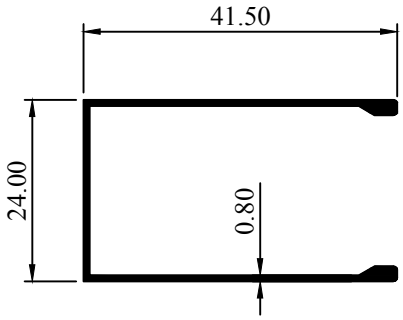



SECTION NO:7009
W=0.254 KG/M
P=214.58 MM

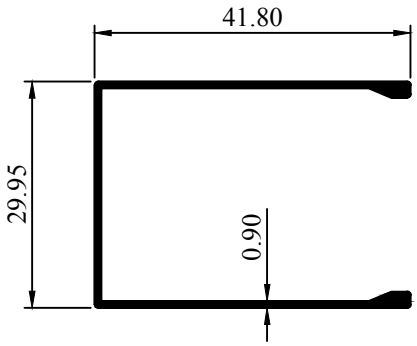



SECTION NO:7009A
W=0.299 KG/M
P=227.01 MM

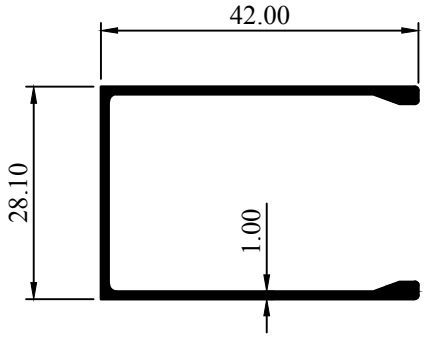


SECTION NO:7103
W=0.329 KG/M
P=223.55 MM

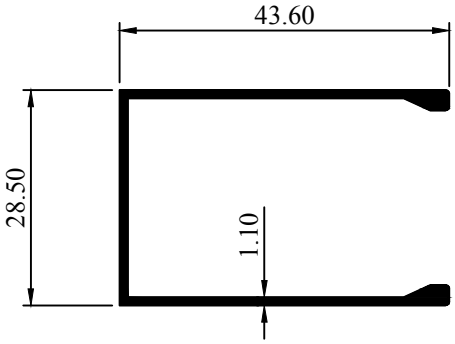




SECTION NO:7104
W=0.375 KG/M
P=232.24 MM

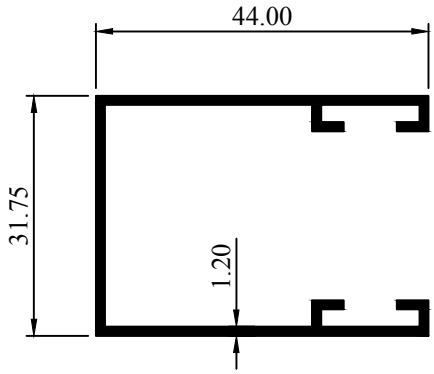




SECTION NO:7105
W=0.466 KG/M
P=289.10 MM

ROLLING DOOR Group VII - 3 (5)

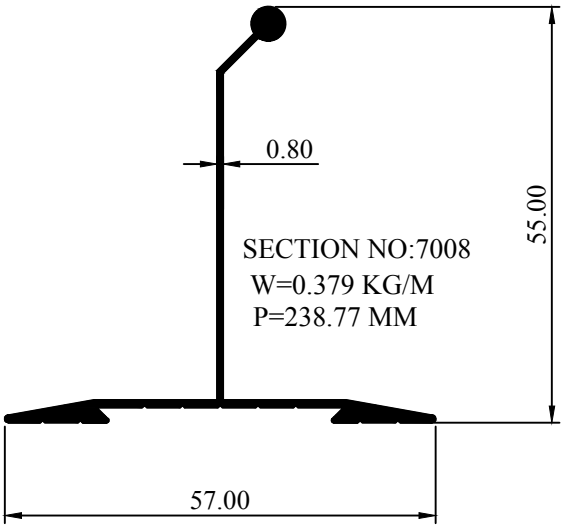


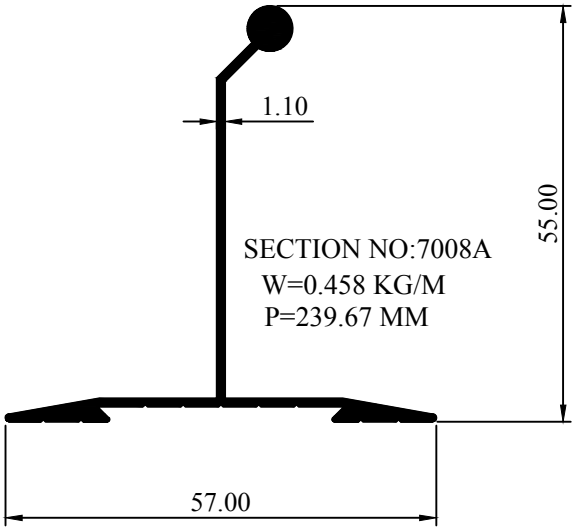


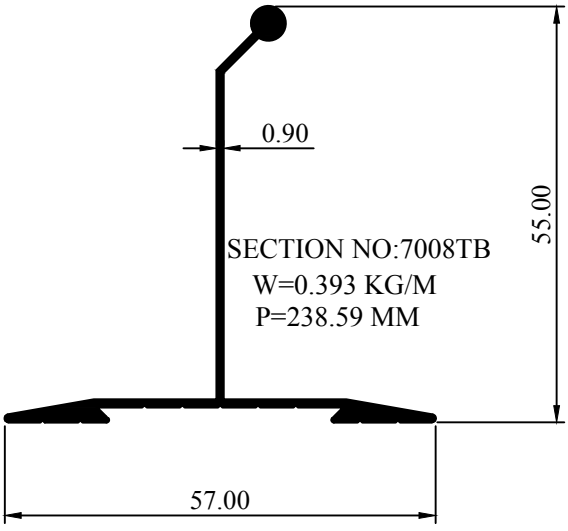
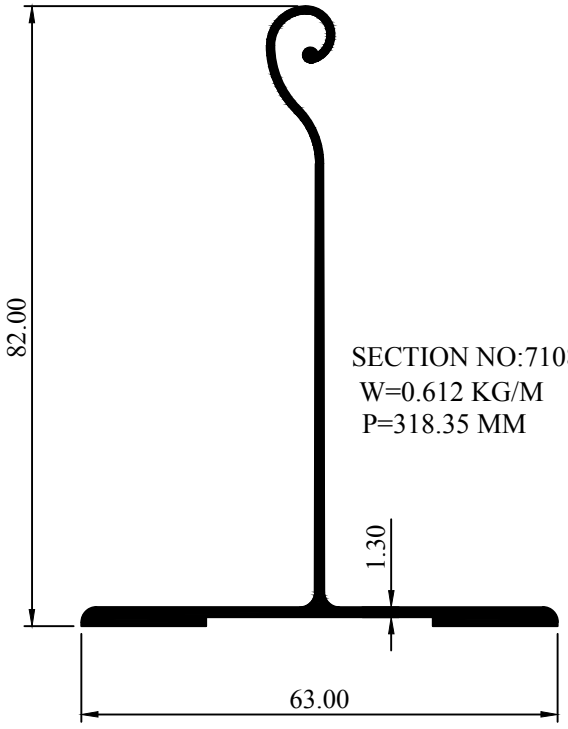


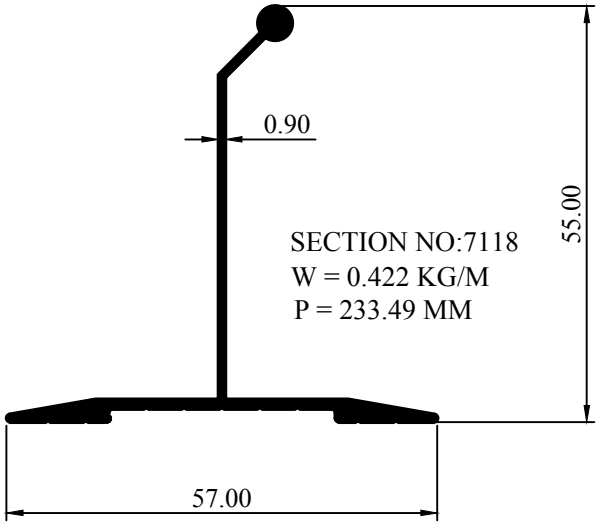
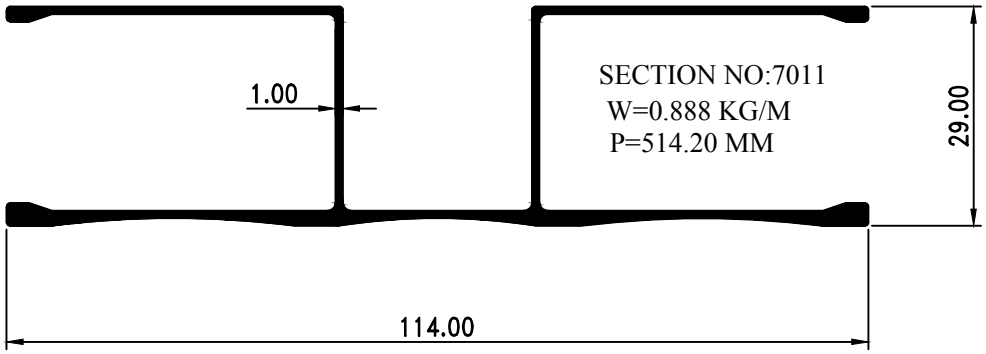
ROLLING DOOR Group VII - 3 (6)




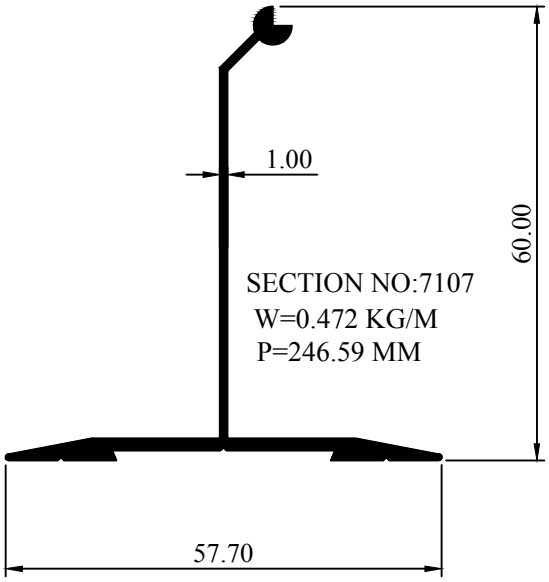


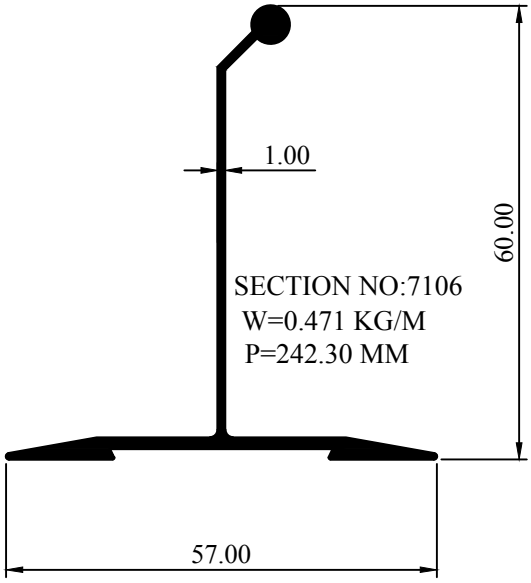
ROLLING DOOR Group VII - 3 (5)




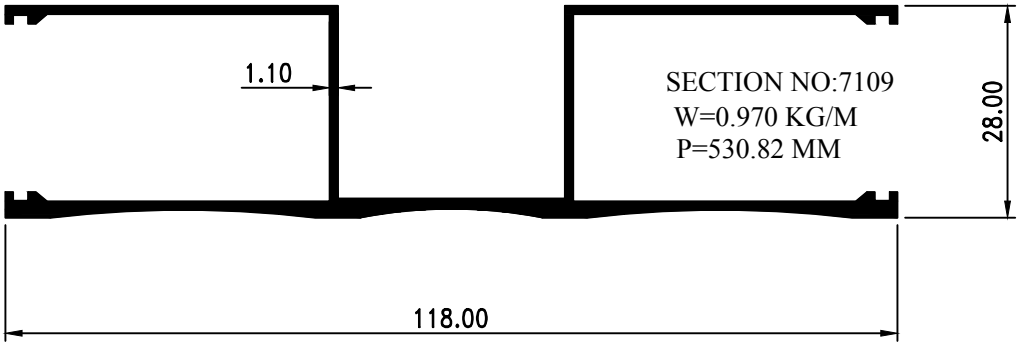



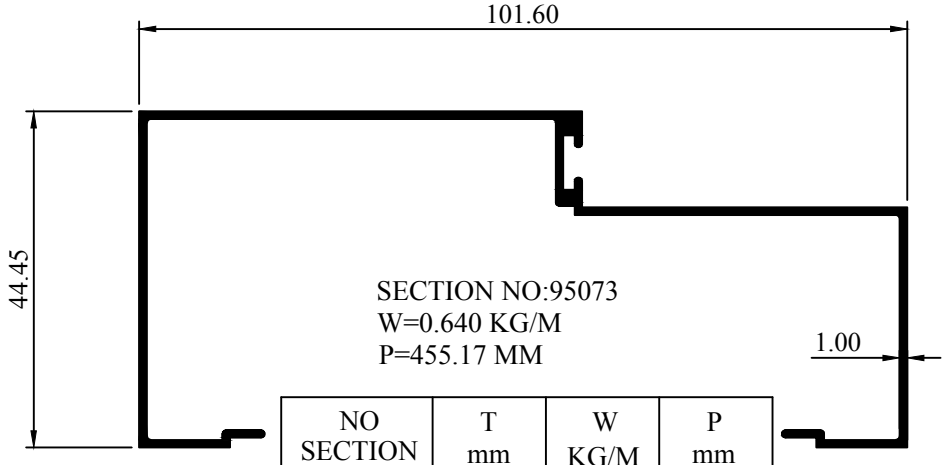
## DOOR JAMB

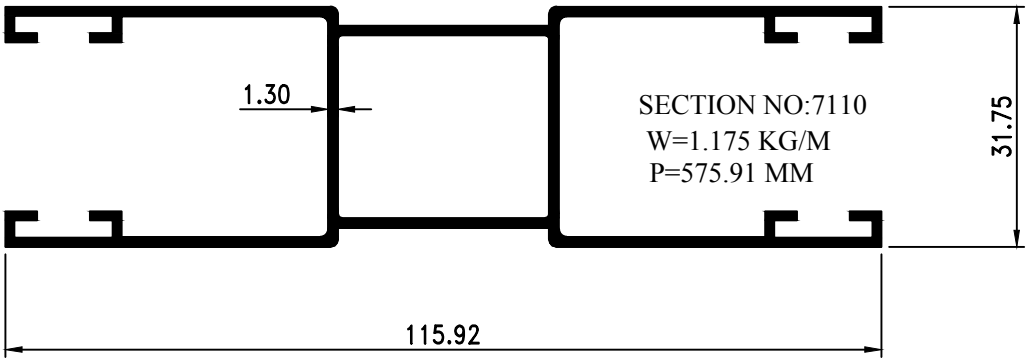Group VII - 4 (1)

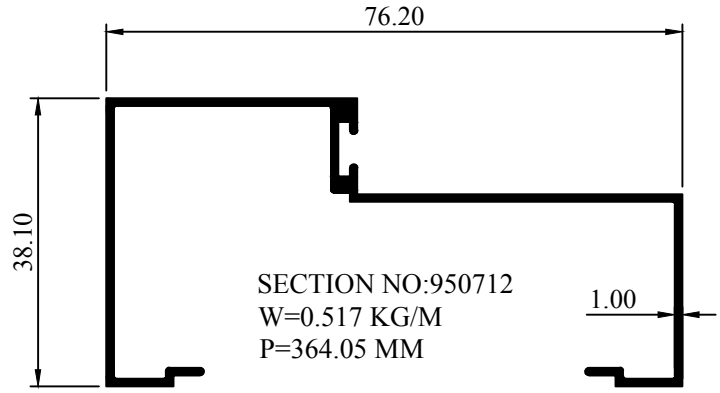


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 950713 | 0.90 | 0.469 | 363.42 |
| 950713TP | 0.80 | 0.423 | 364.19 |

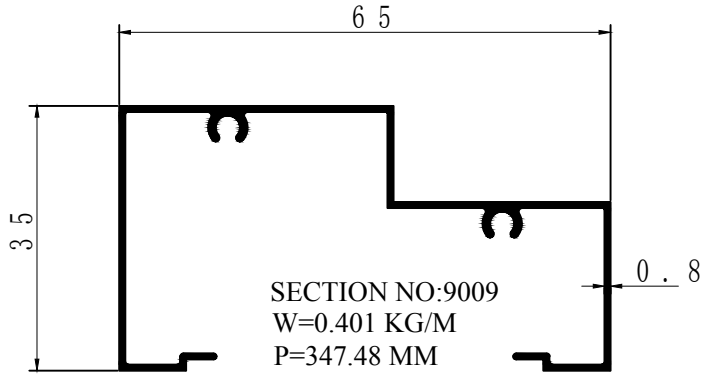




| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 95073TP | 0.90 | 0.581 | 455.94 |

## CURTAIN RAILS


Group VIII - 1 (1)





SECTION NO:6005A
W=0.089 KG/M
P=119.32 MM





SECTION NO:6015
W=0.143 KG/M
P=132.12 MM





SECTION NO:6000
W=0.125 KG/M
P=130.91 MM




SECTION NO:6001
W=0.098 KG/M
P=121.26 MM

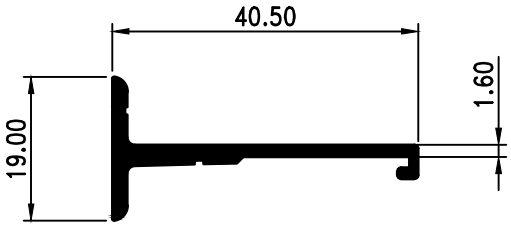



SECTION NO:6002
W=0.320 KG/M
P=124.93 MM

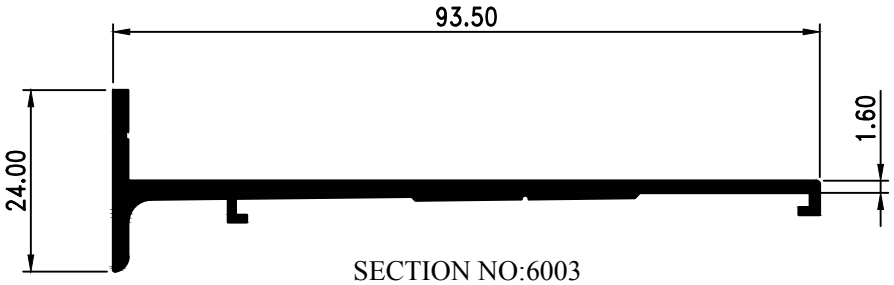


SECTION NO:6003
W=0.692 KG/M
P=251.45 MM


## ASSEMBLY DETAIL : CASEMENT WINDOW

Group IX - 1

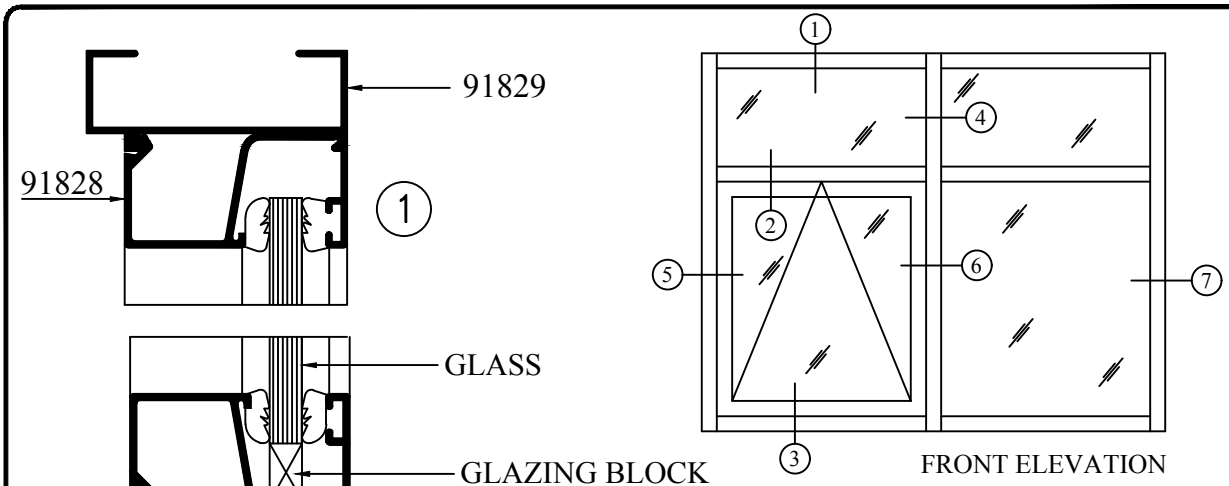



## CASEMENT WINDOW — Group IX - 1 (1)

SECTION NO:91826
W=0.420 KG/M
P=202.09 MM

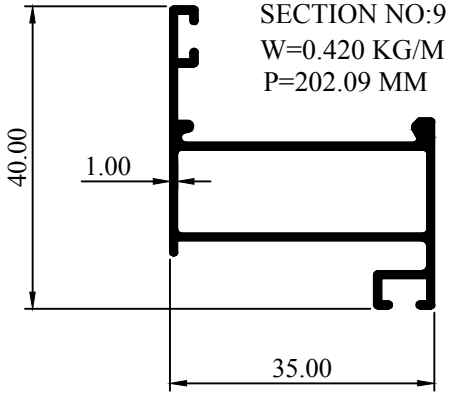



SECTION NO:91863
W=0.371 KG/M
P=199.45 MM

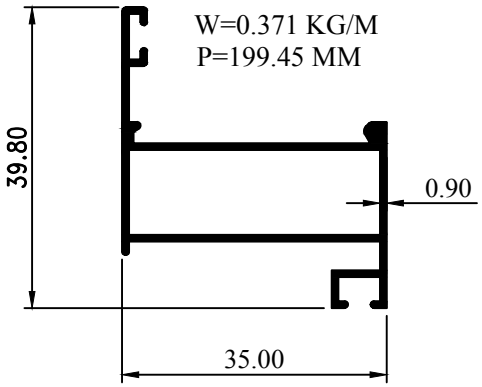

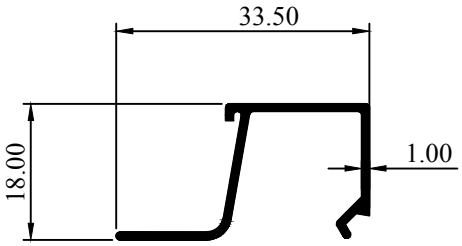


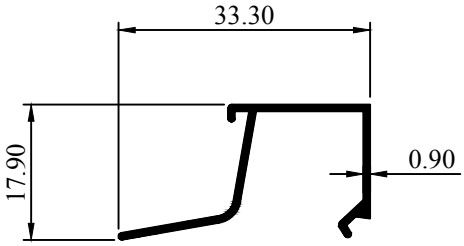

SECTION NO:91828
W=0.191 KG/M
P=138.76 MM





SECTION NO:91861
W=0.170 KG/M
P=137.04 MM

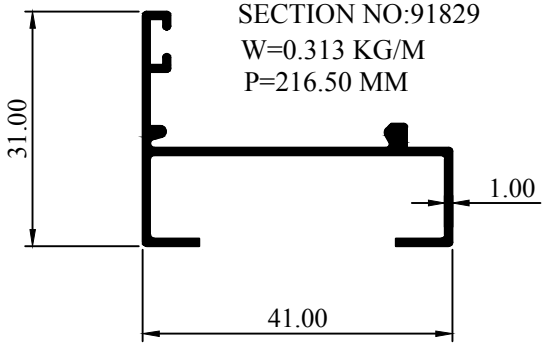SECTION NO:91829
W=0.313 KG/M
P=216.50 MM





SECTION NO:98130
W=0.216 KG/M
P=147.34 MM

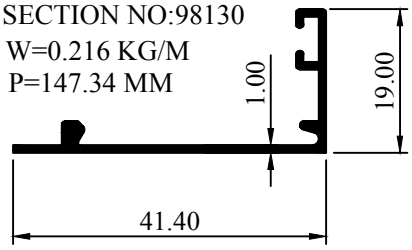



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 91862 | 0.90 | 0.282 | 227.24 |

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 98130A | 0.90 | 0.200 | 148.46 |

## CASEMENT WINDOW — Group IX - 1 (2)

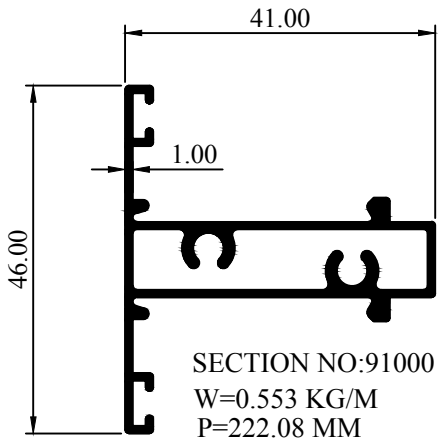



SECTION NO:91000
W=0.553 KG/M
P=222.08 MM

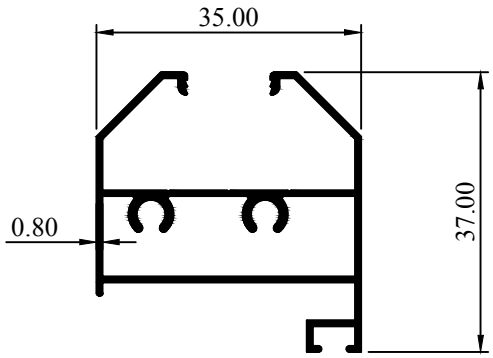




SECTION NO:91858
W=0.422 KG/M
P=236.56 MM

SECTION NO:93204
W=0.169 KG/M
P=139.58 MM

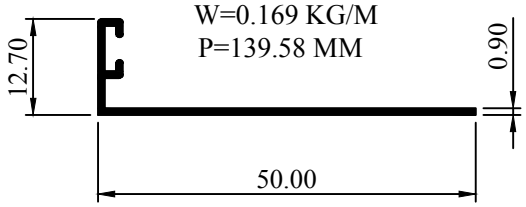



SECTION NO:93201
W=0.133 KG/M
P=109.58 MM

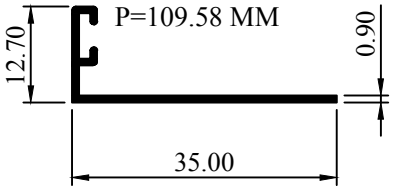

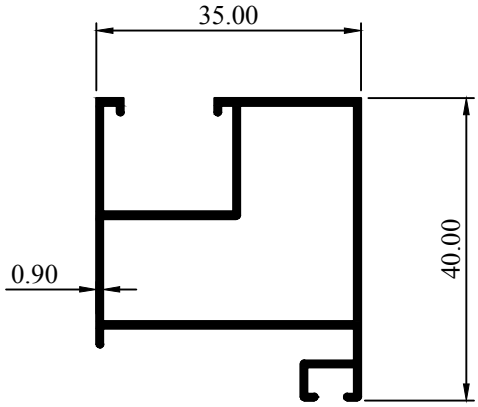




SECTION NO:91866
W=0.448 KG/M
P=226.43 MM





SECTION NO:S0029
W=0.167 KG/M
P=123.56 MM
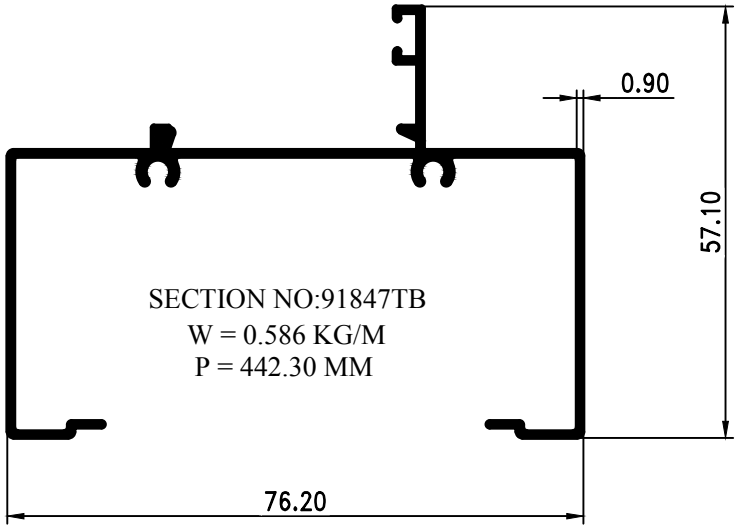
## CASEMENT WINDOW Group IX - 1 (3)





SECTION NO:91847TB
W = 0.586 KG/M
P = 442.30 MM

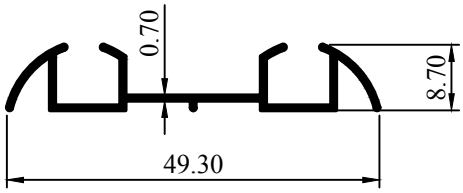


SECTION NO:3029
W = 0.180 KG/M
P = 190.43 MM


# ASSEMBLY DETAIL : WINDOW WALLS

Group IX - 2

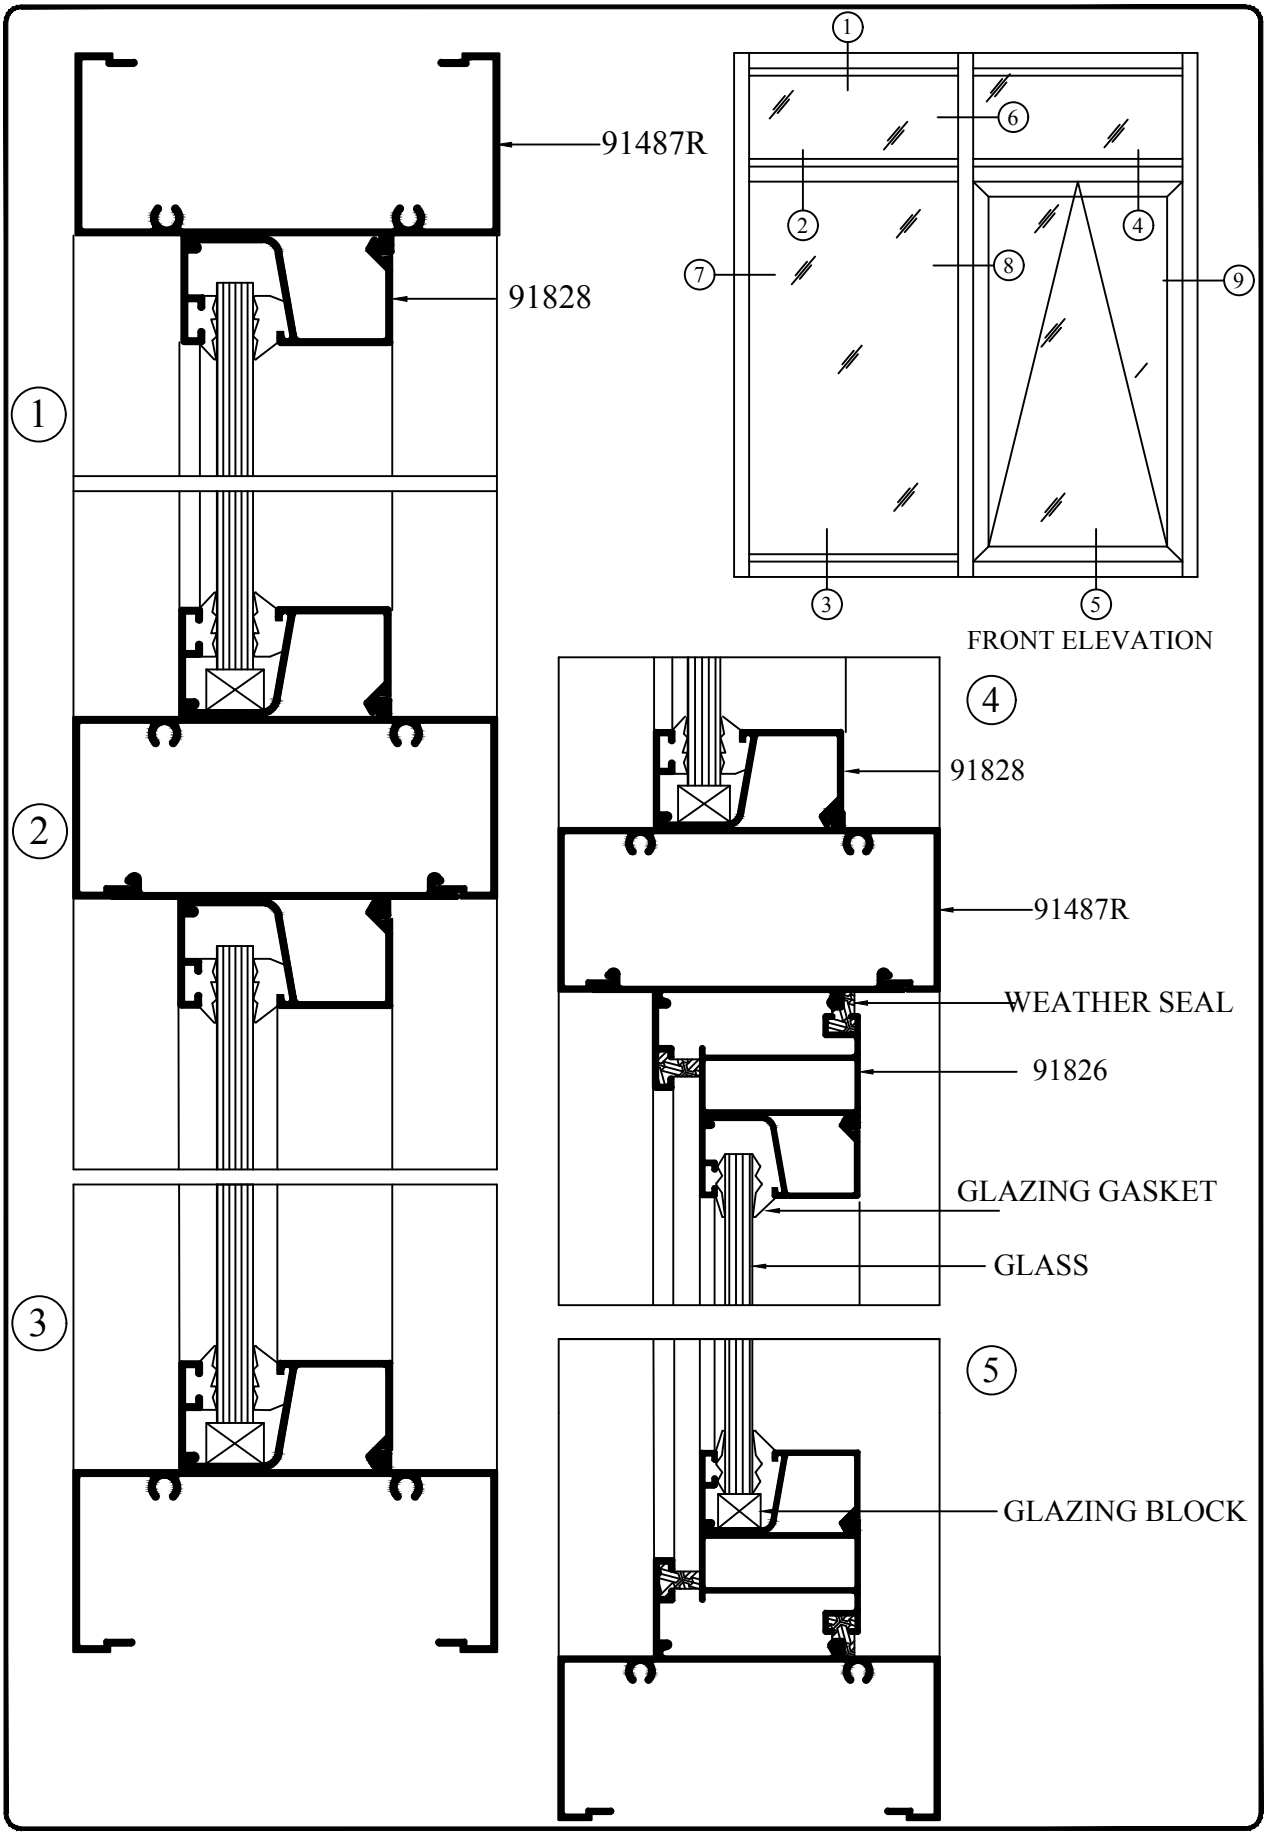



## ASSEMBLY DETAIL : WINDOW WALLS

Group IX - 2

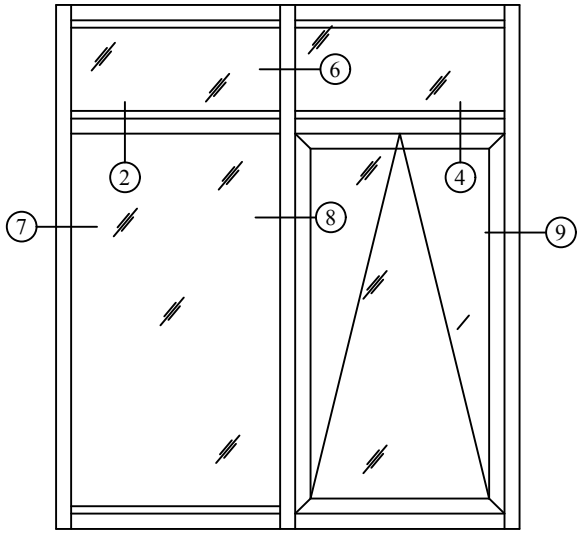



FRONT ELEVATION

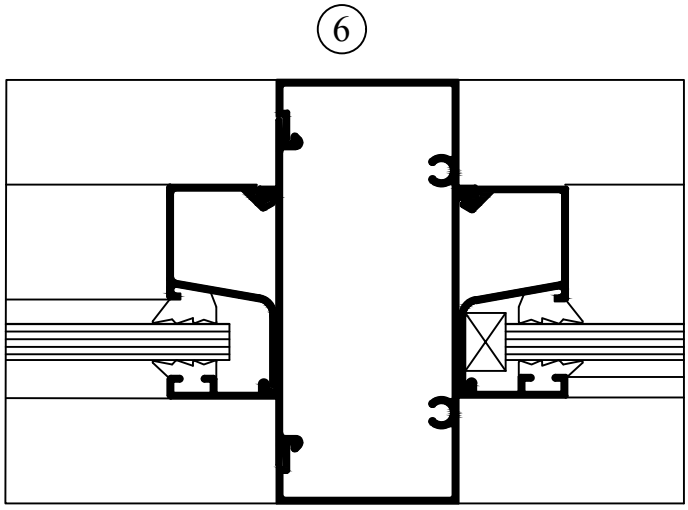


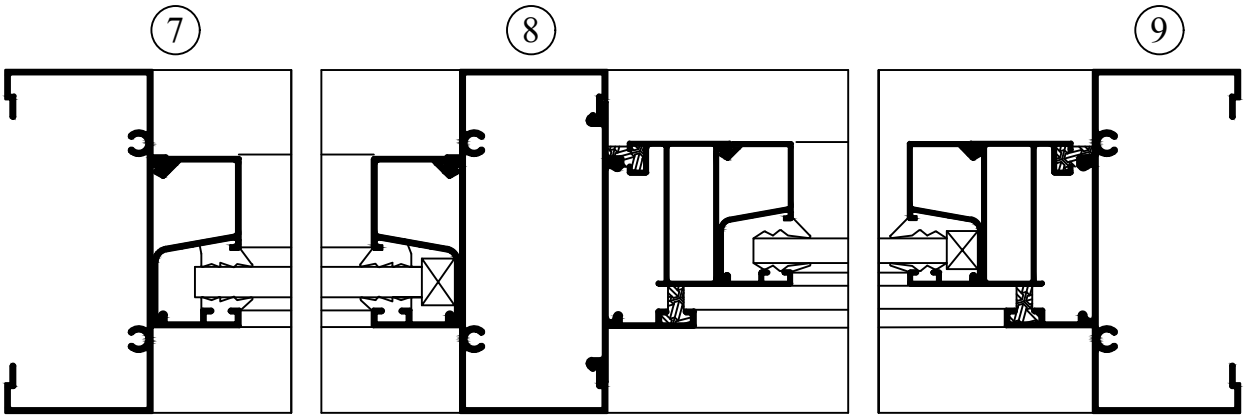
## WINDOW WALLS Group IX - 2 (1)

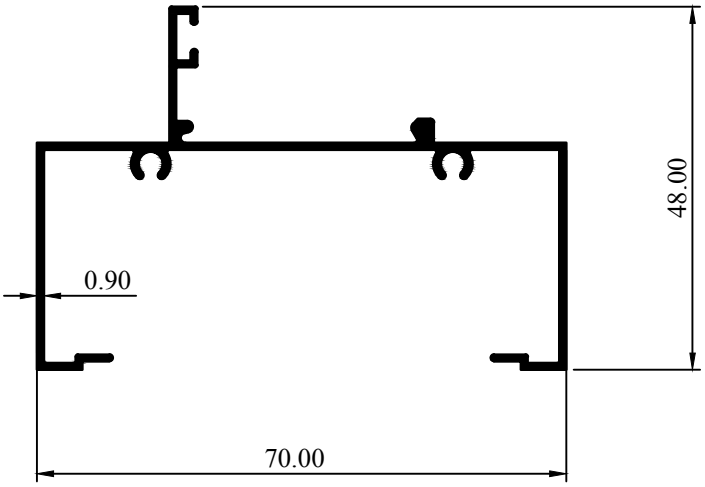


SECTION NO:91847R
W=0.510 KG/M
P=385.93 MM

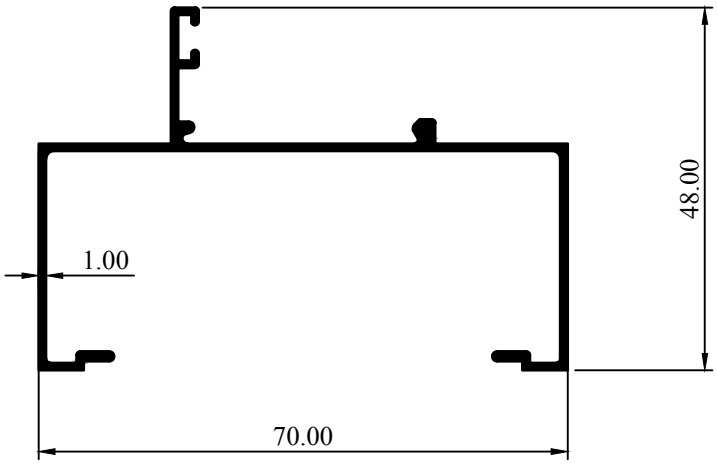



SECTION NO:91001
W=0.514 KG/M
P=356.23 MM

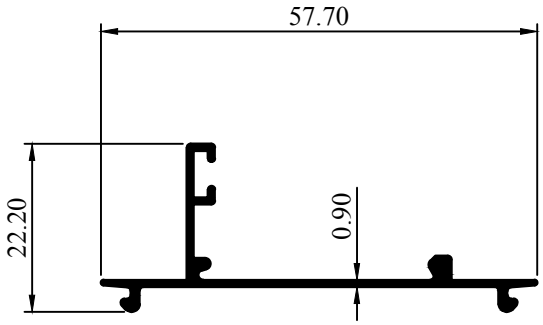



SECTION NO:91848
W=0.267 KG/M
P=190.79 MM


# ASSEMBLY DETAIL : SLIDING WINDOW


Group IX - 3

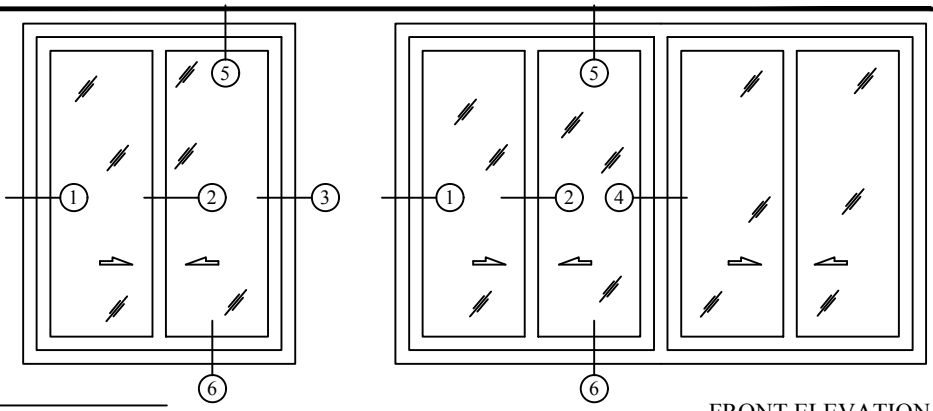



FRONT ELEVATION

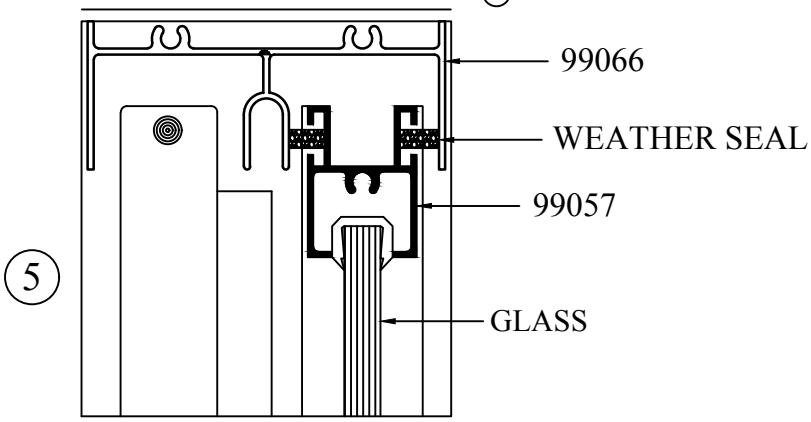


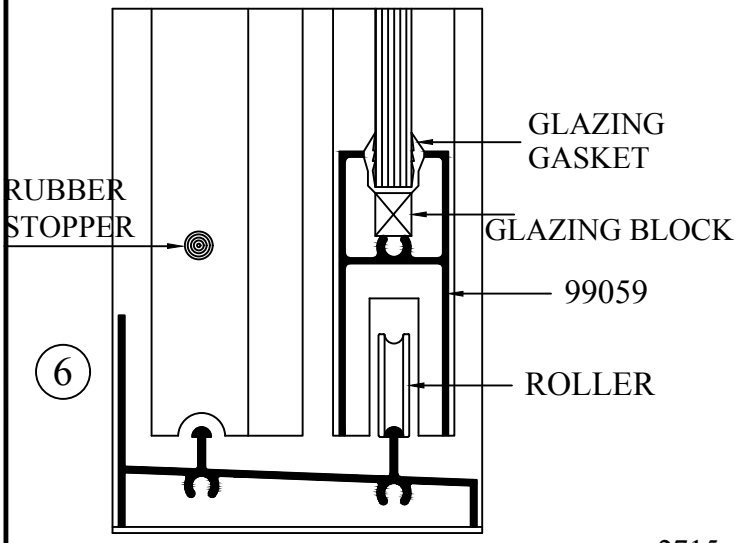


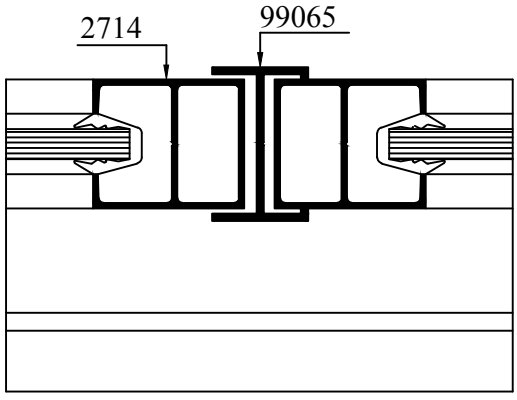

## SLIDING WINDOW — Group IX - 3 (1)

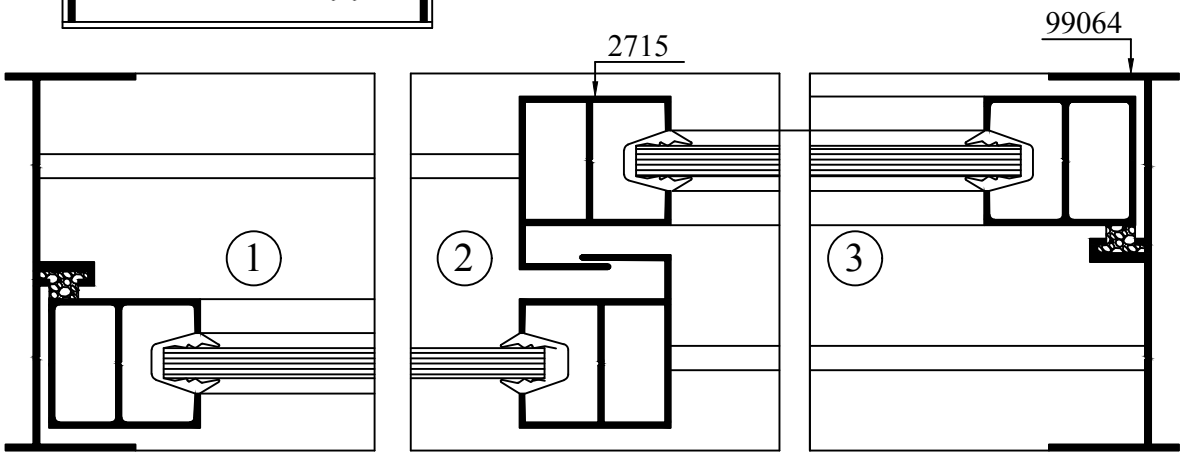



SECTION NO:2714
W=0.242 KG/M
P=136.22 MM

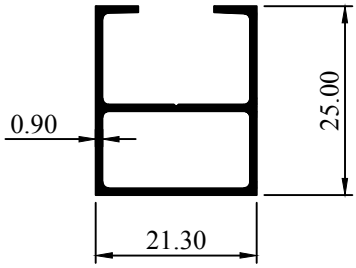

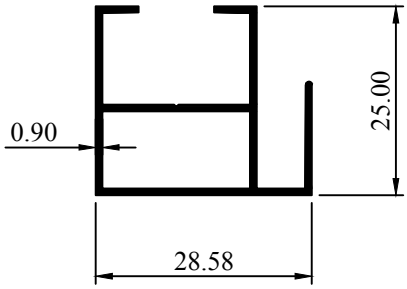

SECTION NO:2715
W=0.289 KG/M
P=179.97 MM




SECTION NO:99057
W=0.238 KG/M
P=183.91 MM

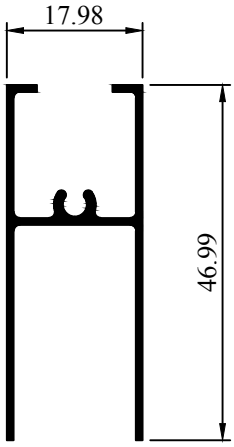



SECTION NO:99059
W=0.314 KG/M
P=244.29 MM





SECTION NO:99065
W=0.182 KG/M
P=114.93 MM


SECTION NO:99066TP
W=0.413 KG/M
P=304.68MM

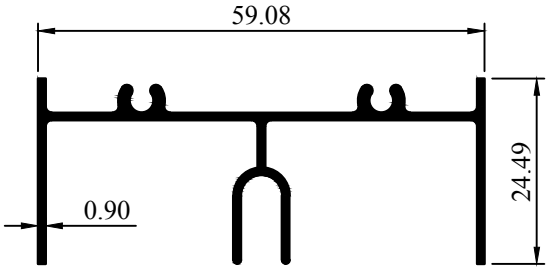


| NO SECTION | T mm | W KG/M | Fin mm |
|---|---|---|---|
| 99066 | 1.00 | 0.447 | 303.65 |

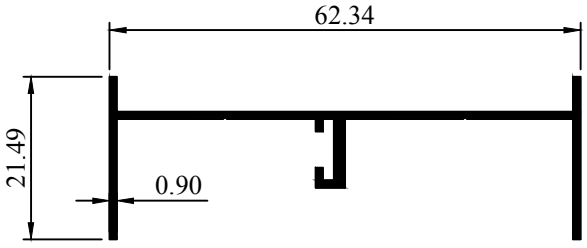


SECTION NO:99064TP
W=0.304 KG/M
P=239.41 MM

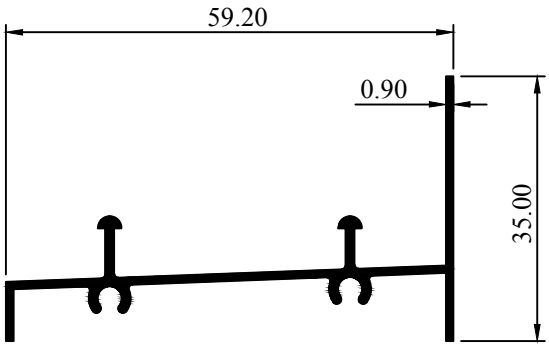




SECTION NO:99063TP
W=0.360 KG/M
P=161.44MM


| NO SECTION | T mm | W KG/M | Fin mm |
|---|---|---|---|
| 99064 | 1.00 | 0.332 | 238.61 |

| NO SECTION | T mm | W KG/M | Fin mm |
|---|---|---|---|
| 99063 | 1.00 | 0.360 | 261.88 |


ASSEMBLY DETAIL : CURTAIN WALLS Group X - 1

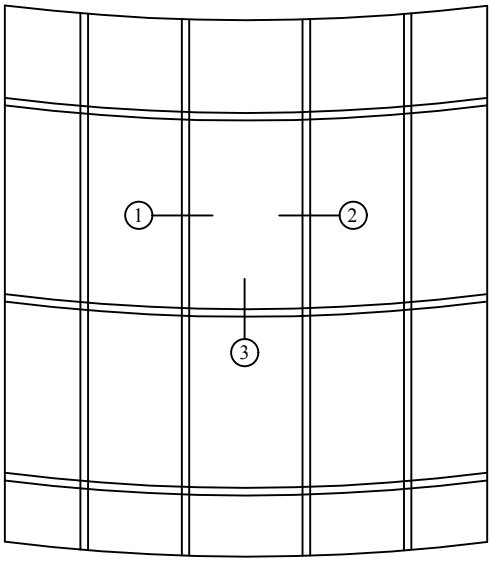

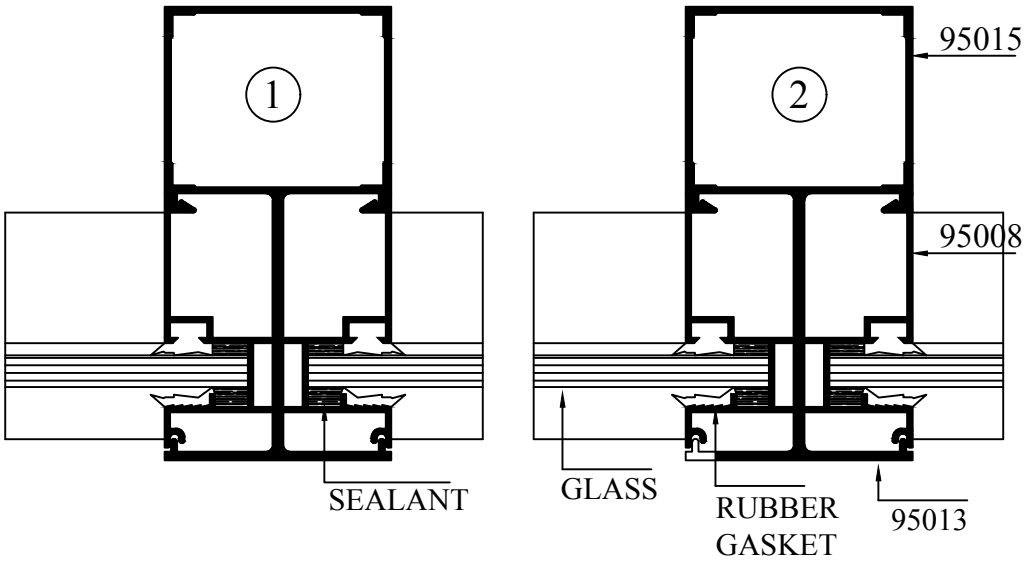


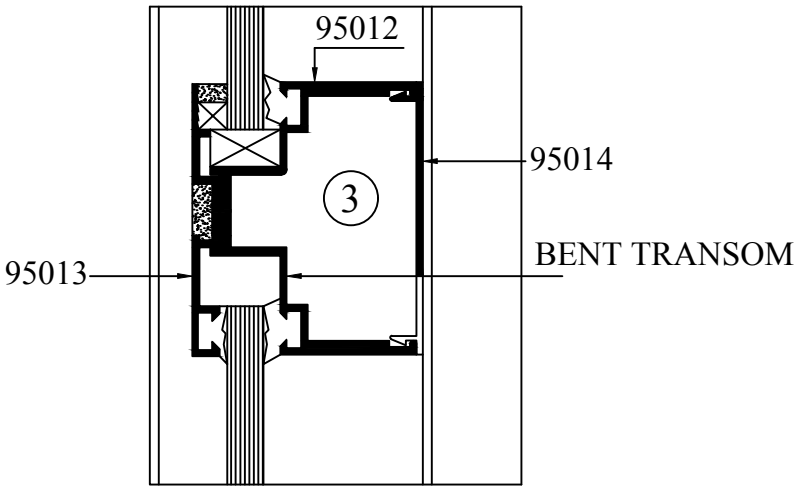
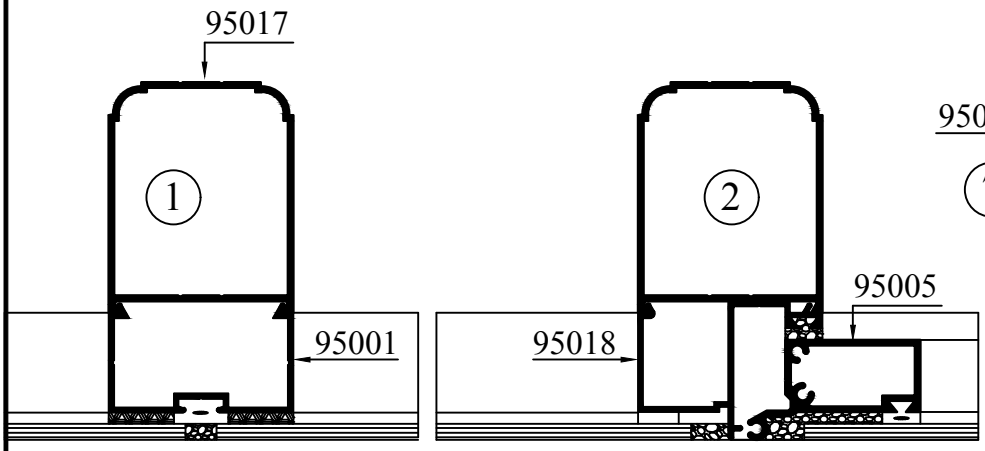



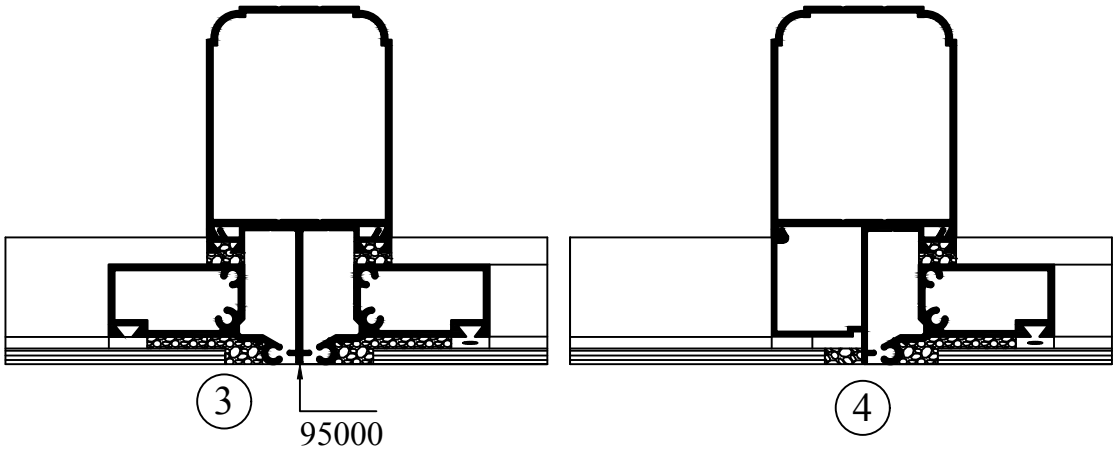
## ASSEMBLY DETAIL : CURTAIN WALLS — Group X - 1

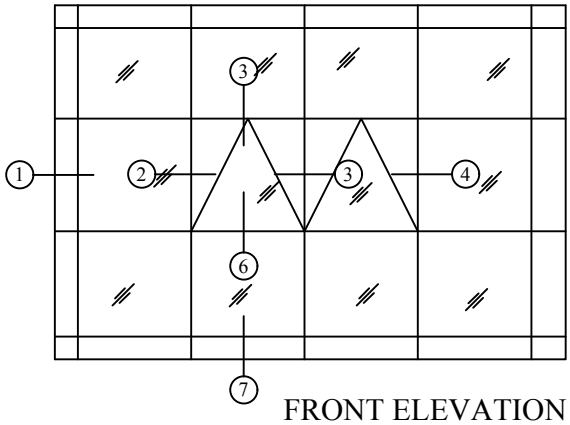



FRONT ELEVATION

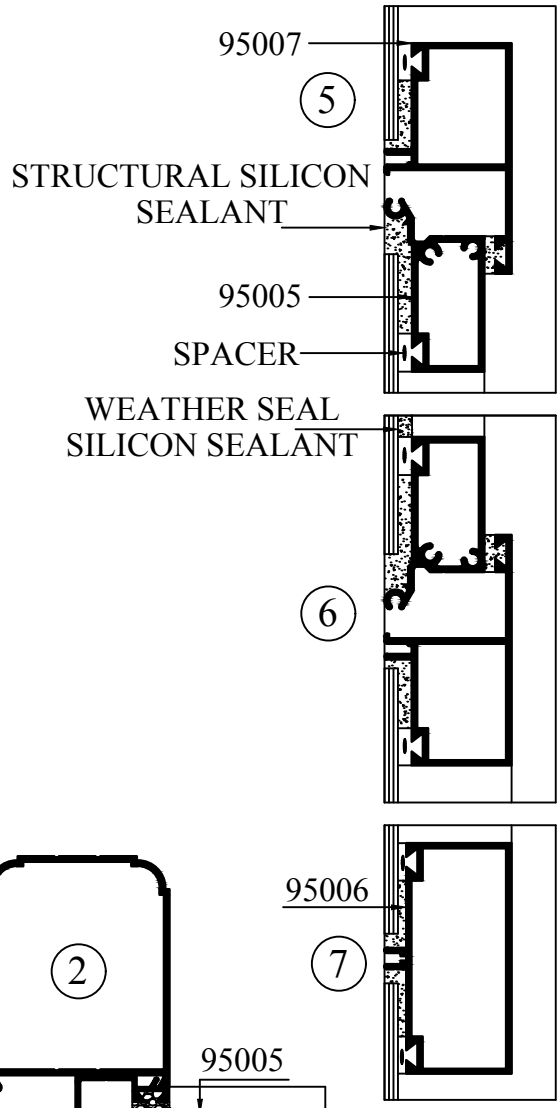





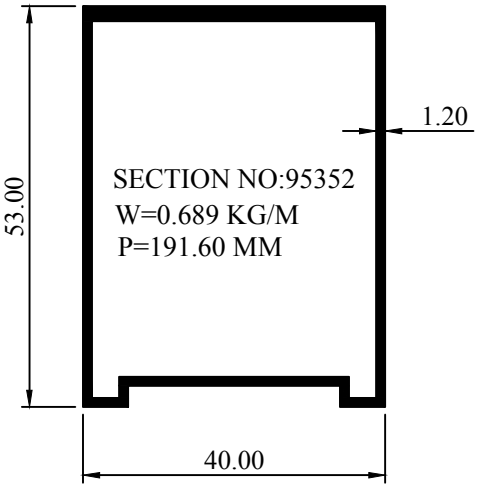
## CURTAIN WALLS Group X - 1 (1)

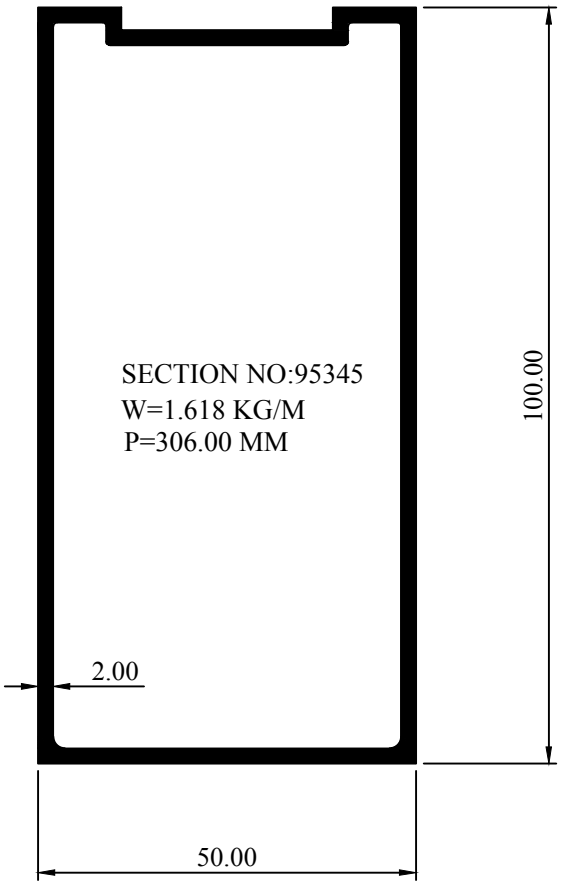



SECTION NO:95345
W=1.618 KG/M
P=306.00 MM

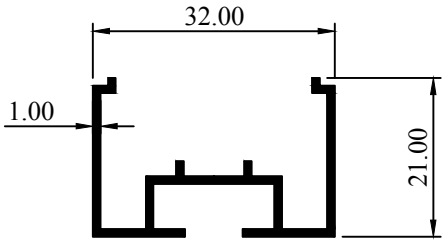



SECTION NO:95351
W=0.278 KG/M
P=206.80 MM




SECTION NO:95352
W=0.689 KG/M
P=191.60 MM

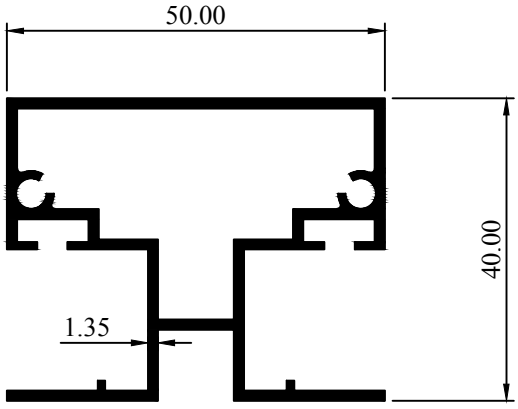



SECTION NO:95356
W=0.878 KG/M
P=316.40 MM

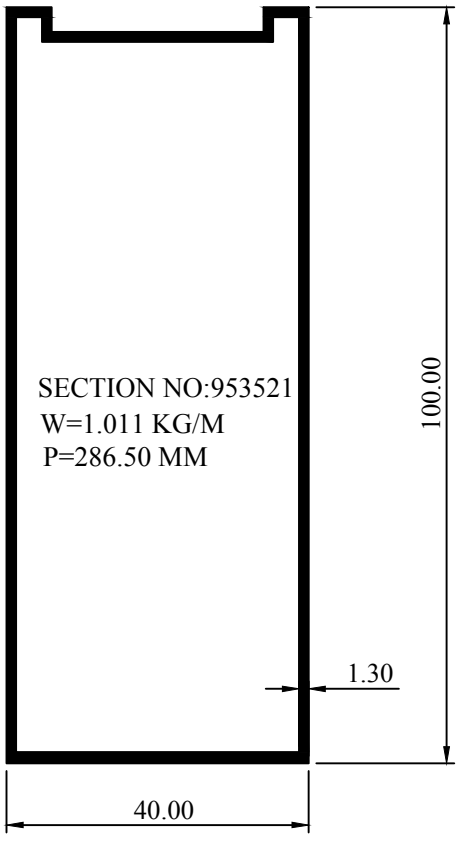



SECTION NO:953521
W=1.011 KG/M
P=286.50 MM


SECTION NO:99125
W=0.231 KG/M
P=142.38 MM

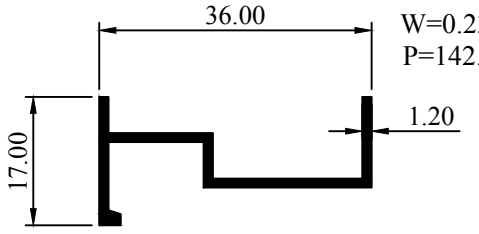


## CURTAIN WALLS — Group X - 1 (2)

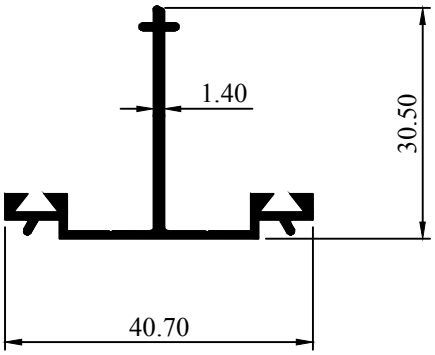



SECTION NO:95000
W=0.310 KG/M
P=195.18 MM

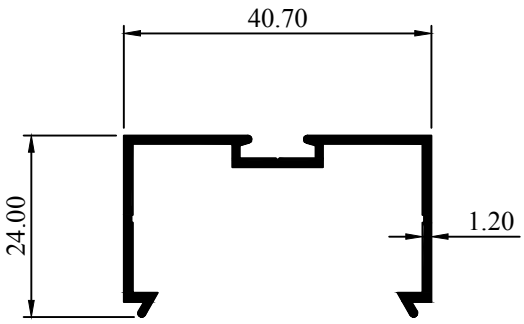



SECTION NO:95001
W=0.315 KG/M
P=205.17 MM

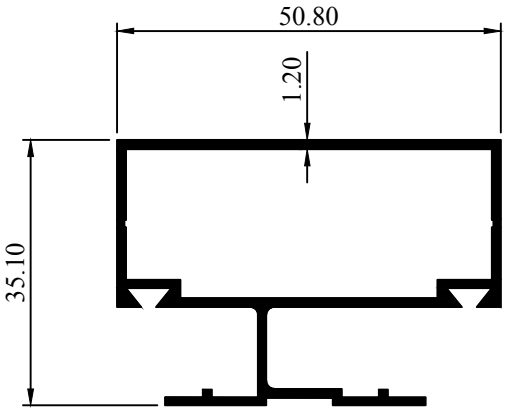



SECTION NO:95002
W=0.649 KG/M
P=264.12 MM

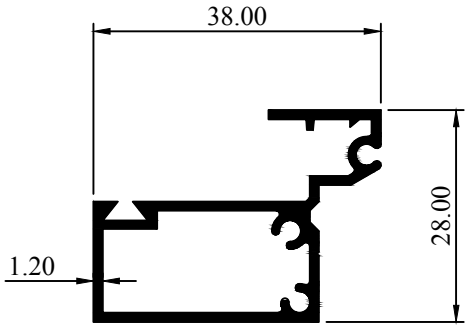


SECTION NO:95003
W=0.463 KG/M
P=178.54 MM

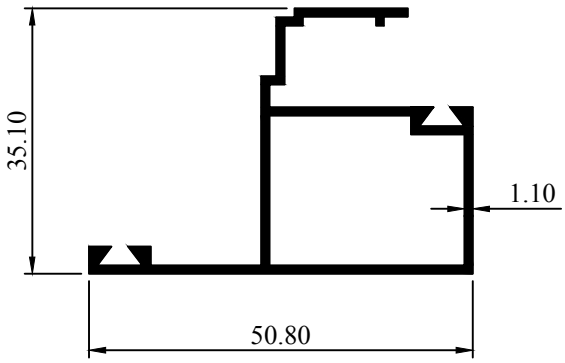



SECTION NO:95004
W=0.498 KG/M
P=235.96 MM

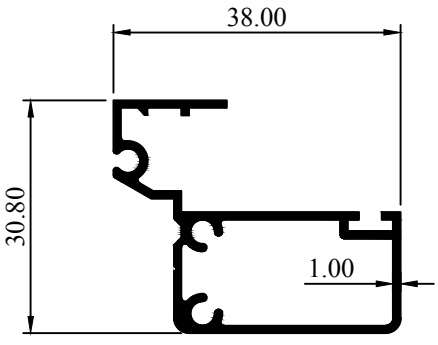



SECTION NO:S0030
W=0.407 KG/M
P=183.69 MM


## CURTAIN WALLS Group X - 1 (3)

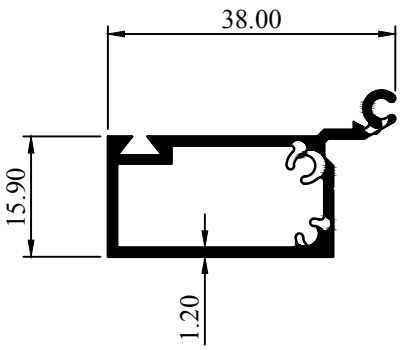



SECTION NO:95005
W=0.393 KG/M
P=136.31 MM

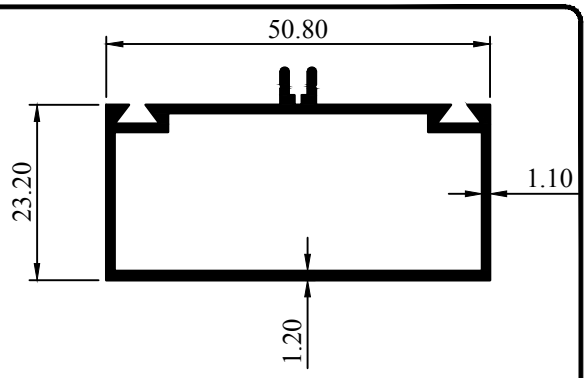



SECTION NO:95006
W=0.515 KG/M
P=187.23 MM

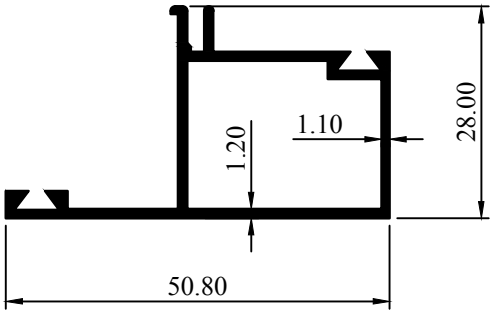


SECTION NO:95007
W=0.465 KG/M
P=195.24 MM

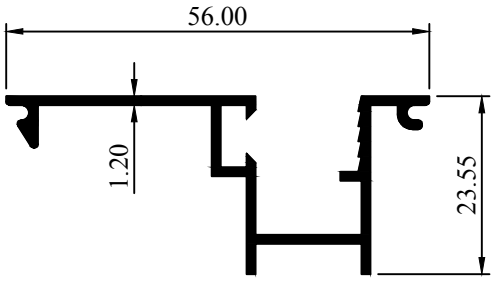



SECTION NO:95008
W=0.406 KG/M
P=245.21 MM

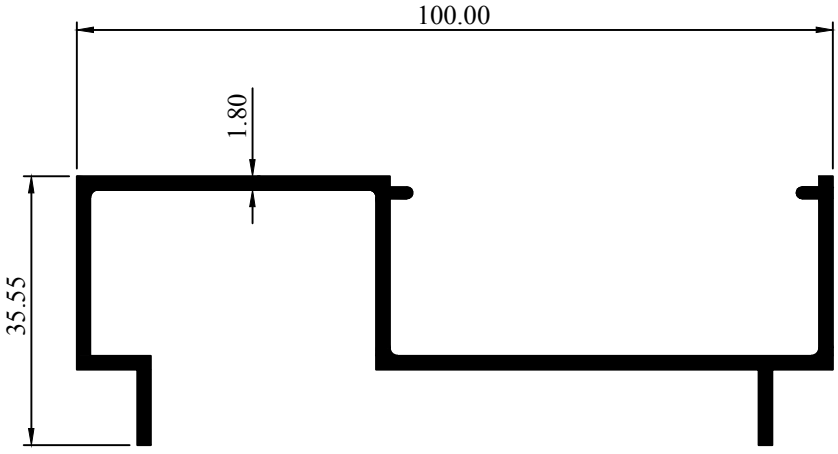



SECTION NO:95009
W=0.997 KG/M
P=411.10 MM


## CURTAIN WALLS Group X - 1 (4)

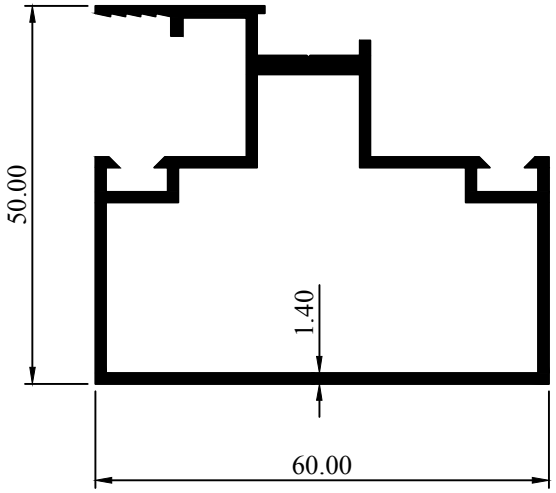



SECTION NO:95010
W=0.977 KG/M
P=301.92 MM

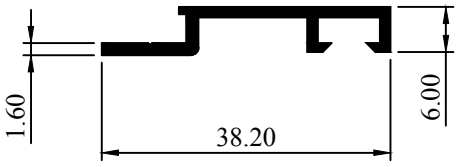



SECTION NO:95011
W=0.217 KG/M
P=115.17 MM

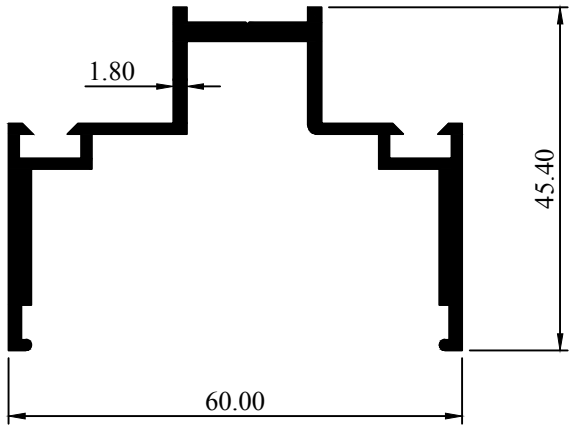


SECTION NO:95012
W=0.868 KG/M
P=329.81 MM

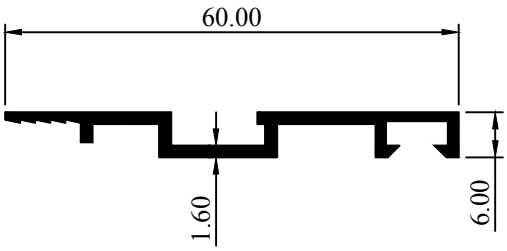



SECTION NO:95013
W=0.335 KG/M
P=172.72 MM

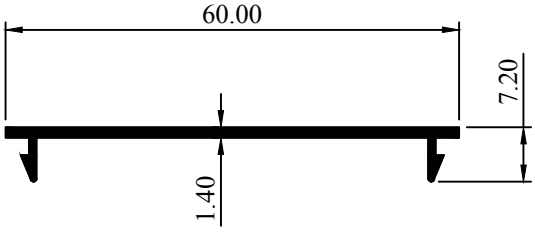



SECTION NO:95014
W=0.266 KG/M
P=147.63 MM


CURTAIN WALLS Group X - 1 (5)

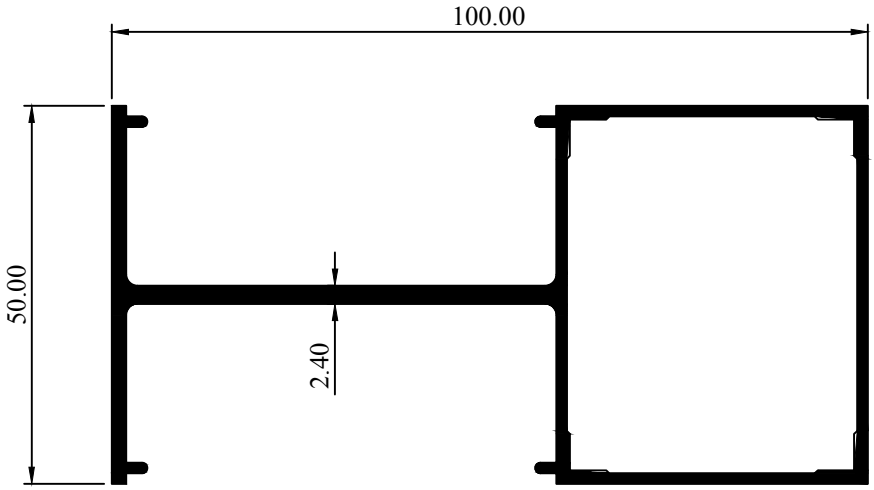



SECTION NO:95015
W=1.389 KG/M
P=412.62 MM

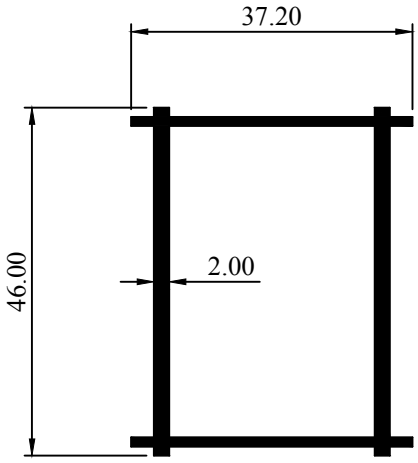


SECTION NO:95016
W=0.715 KG/M
P=183.20 MM

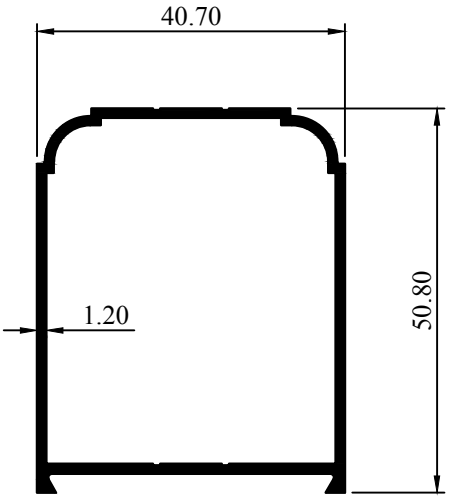



SECTION NO:95017
W=0.581 KG/M
P=185.94 MM

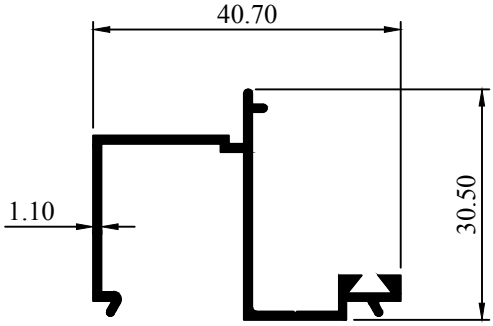



SECTION NO:95018
W=0.329 KG/M
P=220.73 MM

## TRANSPORT


Group XI - 1 (1)





SECTION NO:T9473
W=0.054 KG/M
P=61.65 MM




SECTION NO:T9474
W=0.062 KG/M
P=70.65 MM





SECTION NO:T9475
W=0.069 KG/M
P=78.60 MM





SECTION NO:T9476
W = 0.084 KG/M
P = 79.33 MM

## LOUVRES


Group XII - 1 (1)

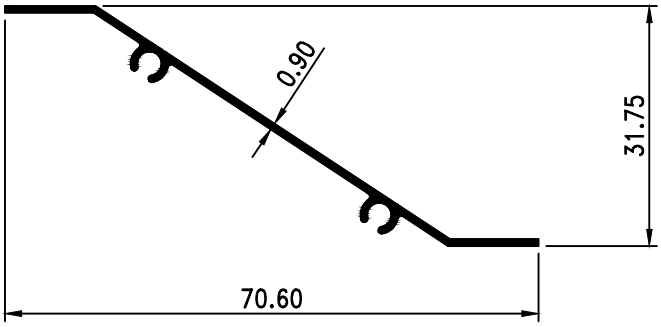


SECTION NO:7014
W=0.234 KG/M
P=187.06 MM

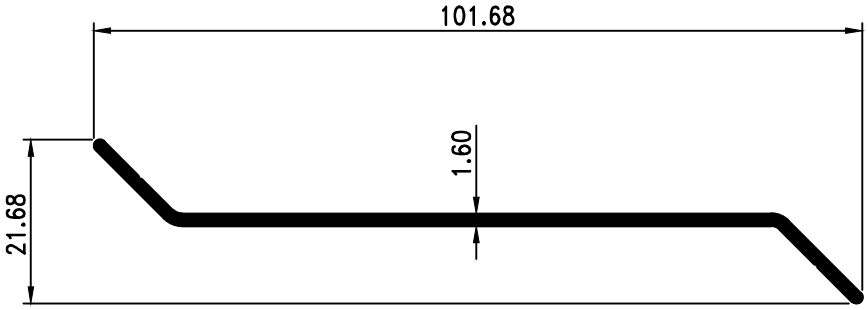


SECTION NO:7200
W=0.474 KG/M
P=221.91 MM

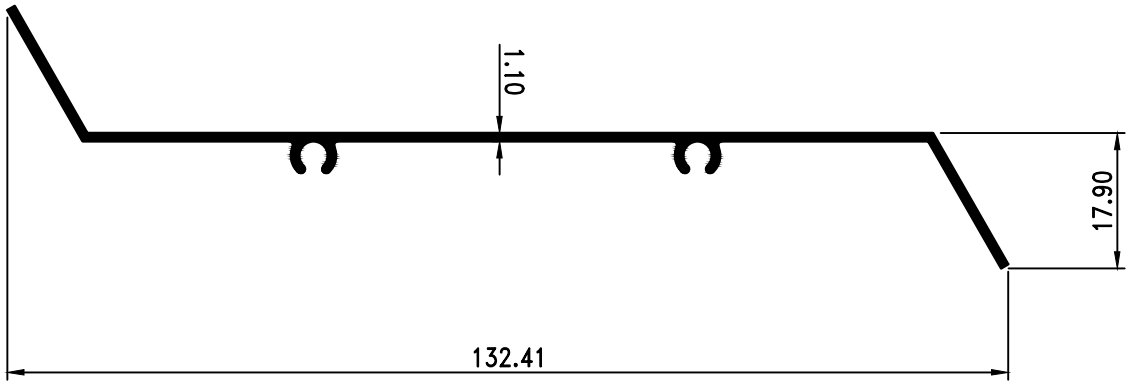




SECTION NO:7201
W=0.509 KG/M
P=335.79 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 7201 | 1.10 | 0.509 | 335.79 |
| 7202 | 1.00 | 0.458 | 336.98 |


# ASSEMBLY DETAIL : SHOW CASES

Group XIII - 1

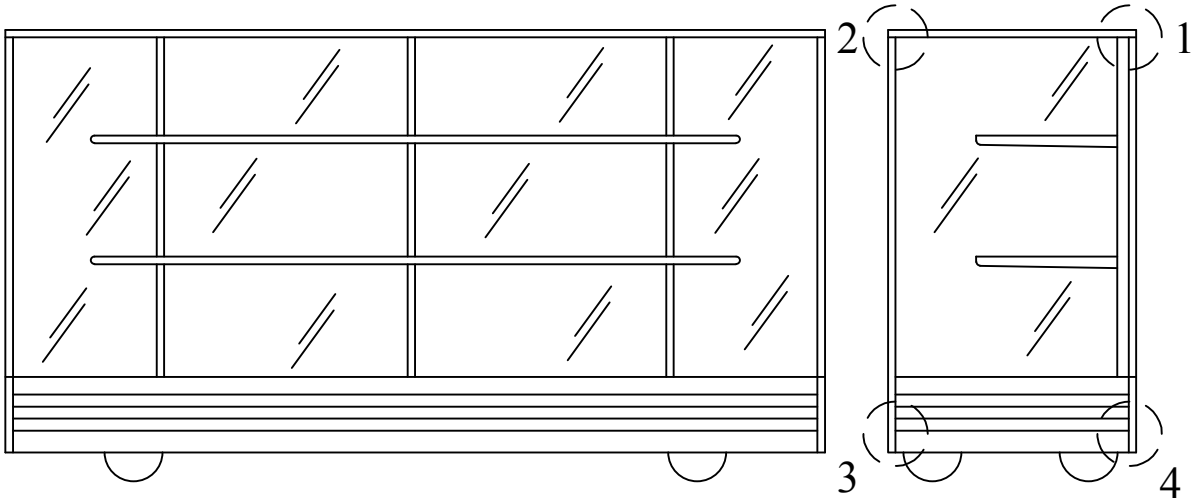

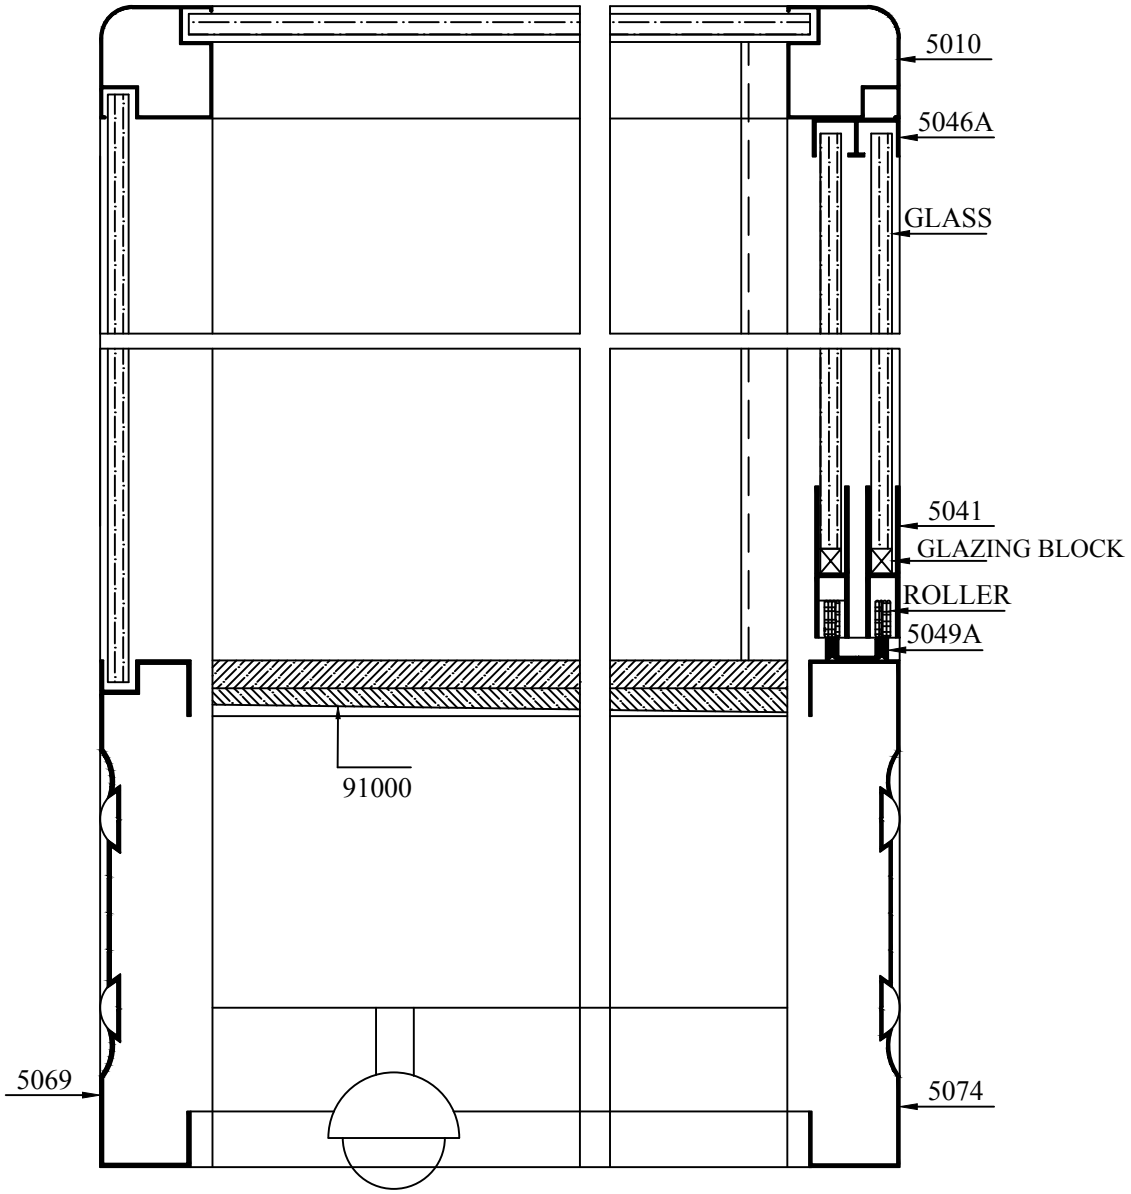



## SHOW CASES Group XIII - 1 (1)

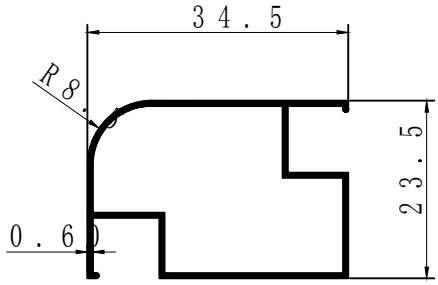



SECTION NO:5024
W=0.208 KG/M
P=147.44 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 5003 | 0.70 | 0.241 | 146.95 |
| 5002 | 0.80 | 0.274 | 146.47 |

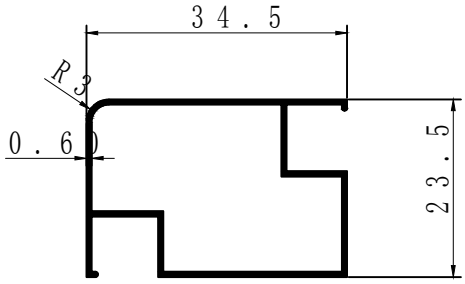



SECTION NO:5025
W=0.212 KG/M
P=149.80 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 5005 | 0.70 | 0.246 | 149.31 |
| 5006 | 0.80 | 0.279 | 148.83 |

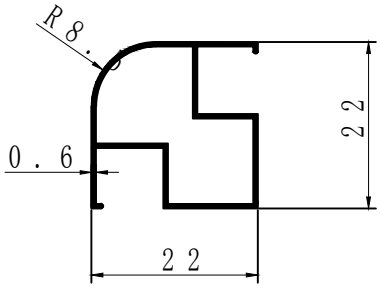


SECTION NO:5026
W=0.162 KG/M
P=119.44 MM


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 5007 | 0.70 | 0.188 | 118.95 |

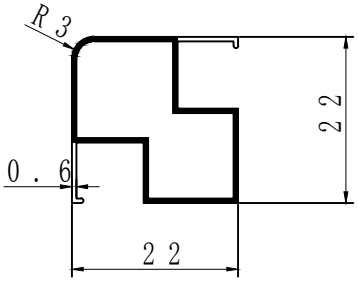


SECTION NO:5027
W=0.166 KG/M
P=121.80 MM


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 5008 | 0.70 | 0.193 | 121.31 |

## SHOW CASES Group XIII - 1 (2)

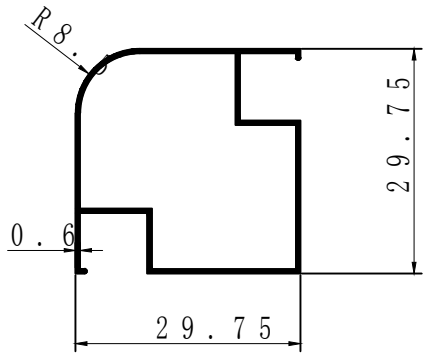



SECTION NO:5031
W=0.213 KG/M
P=150.44 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 5009 | 0.70 | 0.247 | 149.95 |
| 5010 | 0.80 | 0.281 | 149.47 |

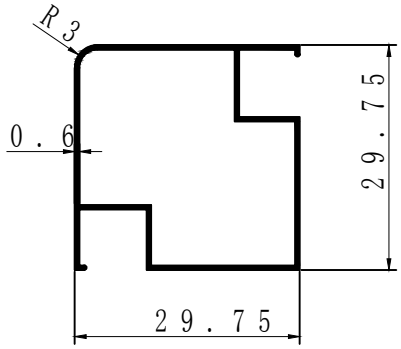



SECTION NO:5032
W=0.216 KG/M
P=152.80 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 5011 | 0.70 | 0.251 | 152.31 |
| 5012 | 0.80 | 0.286 | 151.83 |

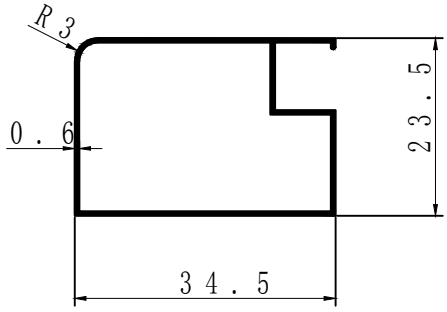


SECTION NO:5036
W=0.197 KG/M
P=132.25 MM


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 5013 | 0.70 | 0.229 | 132.01 |

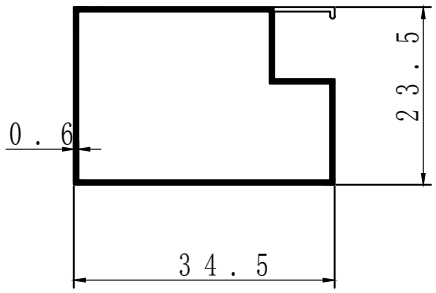


SECTION NO:5036SK
W=0.199 KG/M
P=133.54 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 5014 | 0.70 | 0.231 | 133.30 |


SHOW CASES Group XIII - 1 (3)

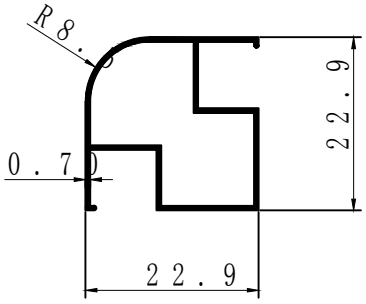



SECTION NO:5015
W=0.195 KG/M
P=122.15 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 5016 | 0.80 | 0.221 | 122.01 |


## SHOW CASES Group XIII - 1 (4)

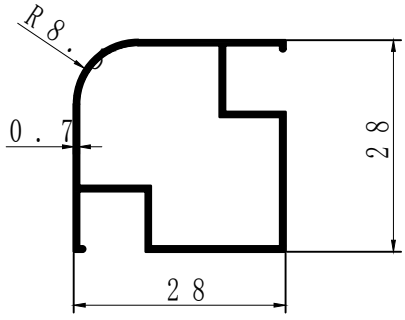



SECTION NO:5017
W=0.234 KG/M
P=142.95 MM

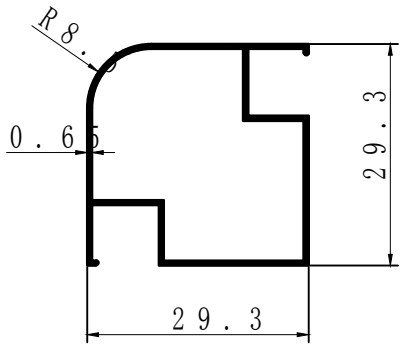



SECTION NO:5019
W=0.227 KG/M
P=148.39 MM

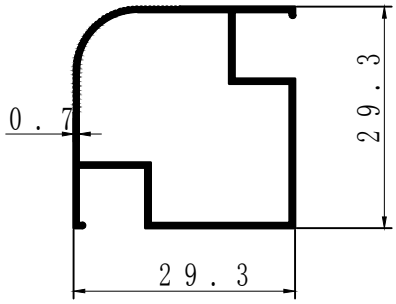



SECTION NO:5018
W=0.239 KG/M
P=154.13 MM

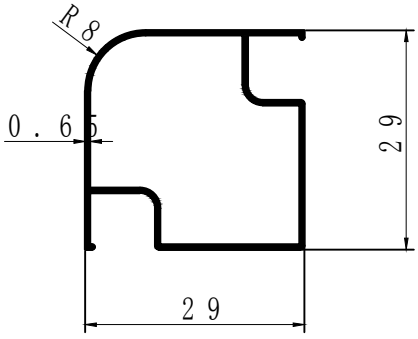


SECTION NO:5021
W=0.218 KG/M
P=142.05 MM

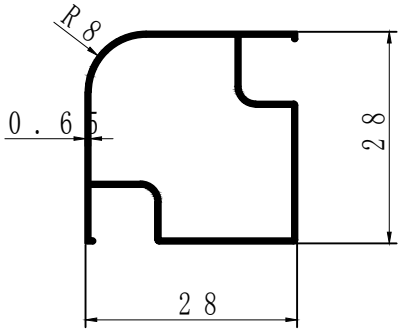



SECTION NO:5020
W=0.211 KG/M
P=138.05 MM

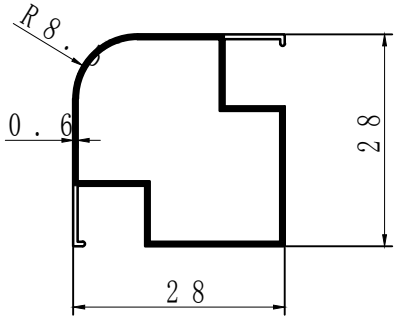



SECTION NO:5023
W=0.201 KG/M
P=143.44 MM


## SHOW CASES Group XIII - 1 (5)

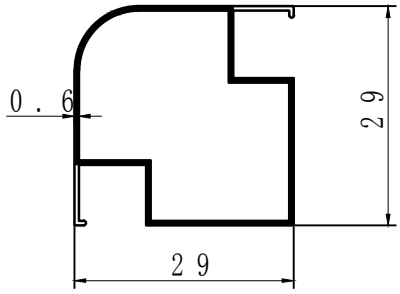



SECTION NO:5028
W=0.208 KG/M
P=147.44 MM

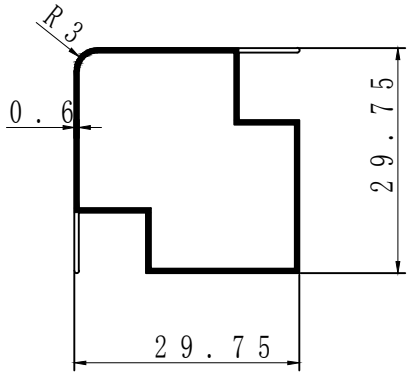



SECTION NO:5029
W=0.214 KG/M
P=149.20 MM





SECTION NO:5022
W=0.147 KG/M
P=100.31 MM

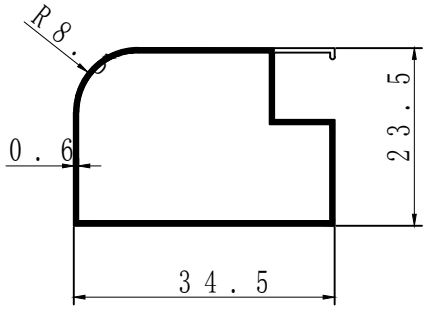


SECTION NO:5033
W=0.193 KG/M
P=129.89 MM

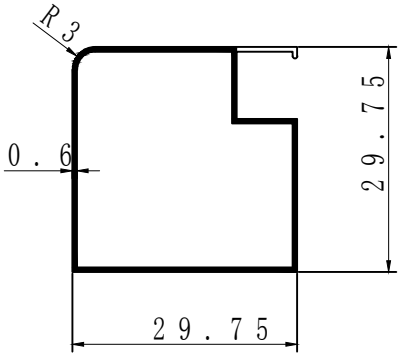



SECTION NO:5030
W=0.202 KG/M
P=135.25 MM

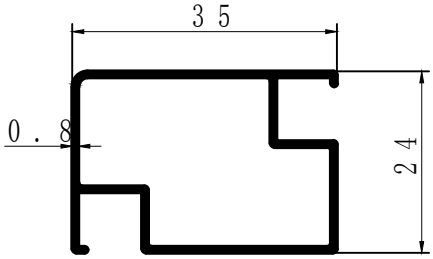



SECTION NO:5034
W = 0.287 KG/M
P = 152.18 MM


## SHOW CASES Group XIII - 1 (6)

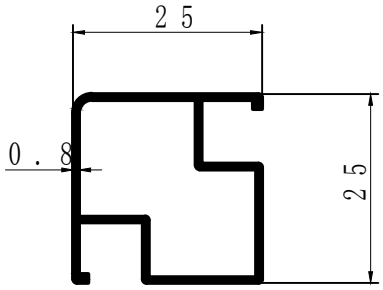


SECTION NO:5083
W = 0.249 KG/M
P = 134.65 MM

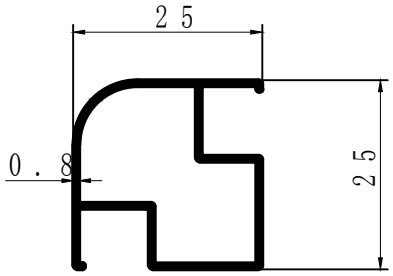



SECTION NO:5084
W = 0.239 KG/M
P = 129.56 MM

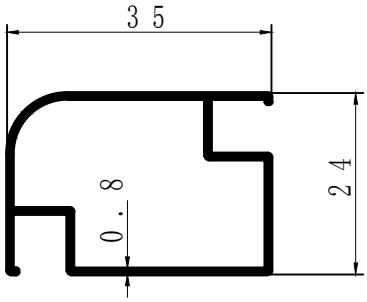



SECTION NO:5085
W = 0.278 KG/M
P = 147.78 MM


## SHOW CASES Group XIII - 1 (7)





SECTION NO:5035
W=0.098 KG/M
P=112.10 MM





SECTION NO:5046
W=0.117 KG/M
P=109.80 MM





SECTION NO:5046A
W=0.127 KG/M
P=117.51 MM




SECTION NO:5048
W=0.085 KG/M
P=51.15 MM





SECTION NO:5049
W=0.096 KG/M
P=53.29 MM





SECTION NO:5058
W=0.121 KG/M
P=55.69 MM


SHOW CASES Group XIII - 1 (8)





SECTION NO:5058A
W=0.128 KG/M
P=53.00 MM





SECTION NO:5049A
W=0.128 KG/M
P=57.17 MM





SECTION NO:5037
W=0.124 KG/M
P=109.01 MM




SECTION NO:5043
W = 0.155 KG/M
P = 107.91 MM





SECTION NO:5051
W=0.171 KG/M
P=96.72 MM

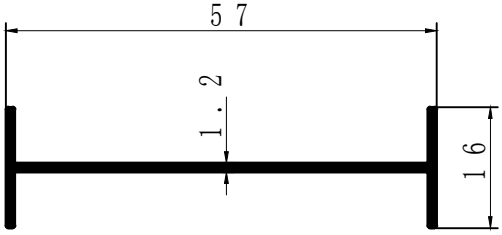



SECTION NO:5050
W=0.281 KG/M
P=174.57 MM


SHOW CASES Group XIII - 1 (9)





SECTION NO:5038
W=0.087 KG/M
P=107.61 MM





SECTION NO:5037A
W=0.129 KG/M
P=107.91 MM





SECTION NO:4005
W=0.079 KG/M
P=75.53 MM




SECTION NO:0128
W=0.071 KG/M
P=58.83 MM





SECTION NO:4003
W = 0.065 KG/M
P = 60.905 MM





SECTION NO:4004
W = 0.080 KG/M
P = 74.75 MM


SHOW CASES Group XIII - 1 (10)

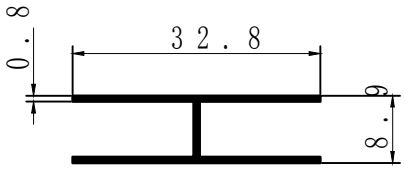



SECTION NO:5039
W=0.158 KG/M
P=147.40 MM

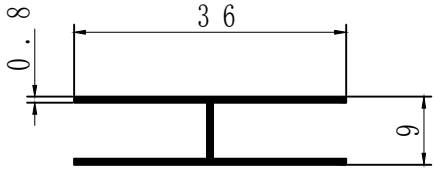


SECTION NO:5040
W=0.172 KG/M
P=160.40 MM





SECTION NO:0117
W=0.114 KG/M
P=59.11 MM

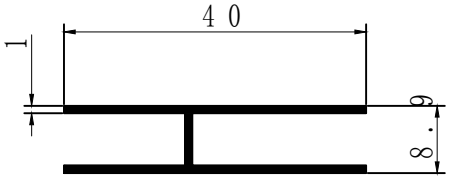



SECTION NO:5041
W=0.235 KG/M
P=175.80 MM

| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 5042 | 0.80 | 0.189 | 176.20 |


## SHOW CASES Group XIII - 1 (11)

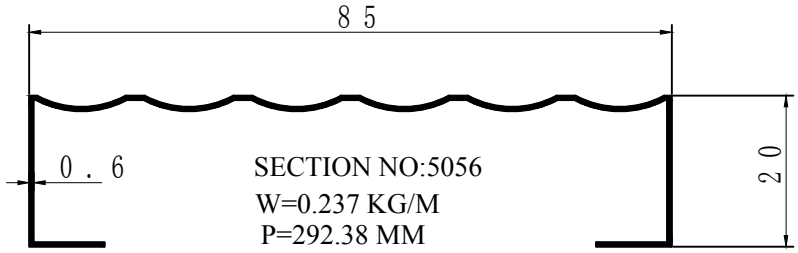



SECTION NO:5056
W=0.237 KG/M
P=292.38 MM

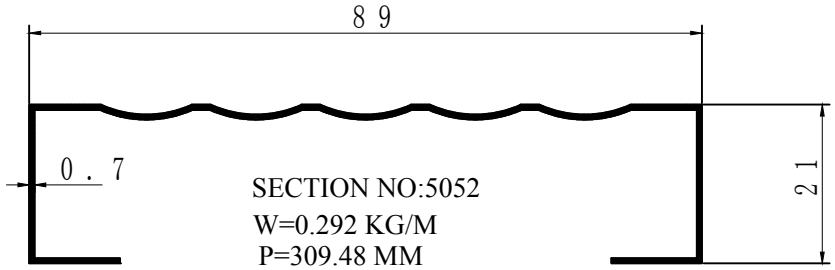


SECTION NO:5052
W=0.292 KG/M
P=309.48 MM

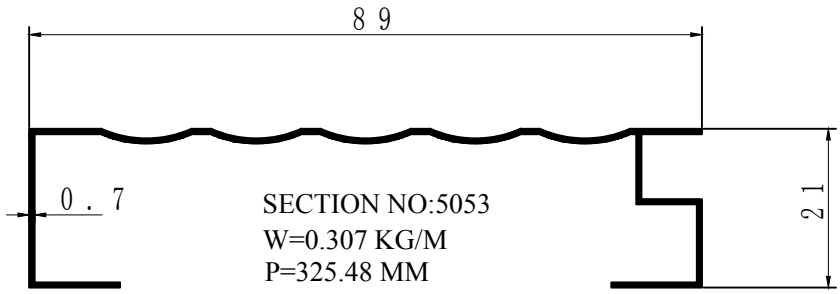



SECTION NO:5053
W=0.307 KG/M
P=325.48 MM

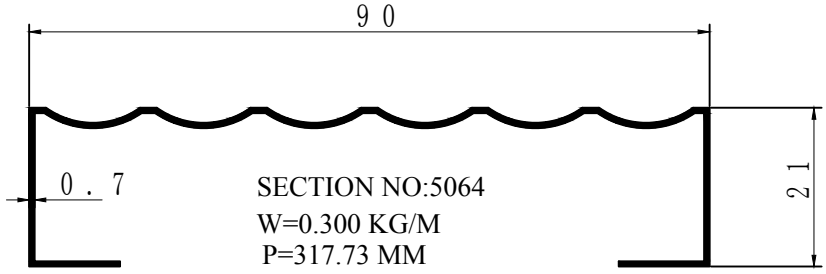



SECTION NO:5064
W=0.300 KG/M
P=317.73 MM


## SHOW CASES Group XIII - 1 (12)

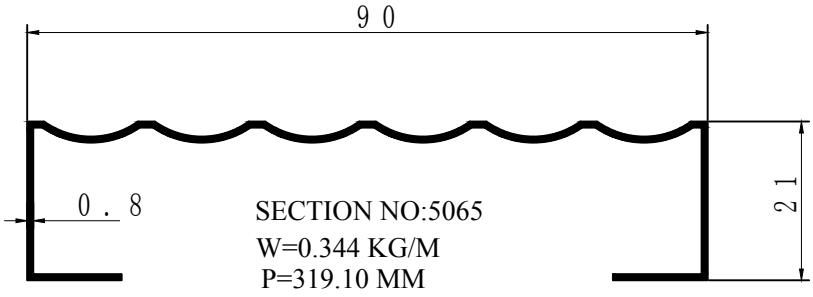



SECTION NO:5065
W=0.344 KG/M
P=319.10 MM

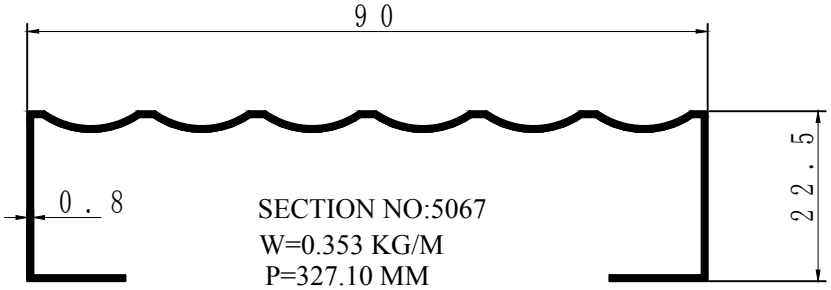


SECTION NO:5067
W=0.353 KG/M
P=327.10 MM

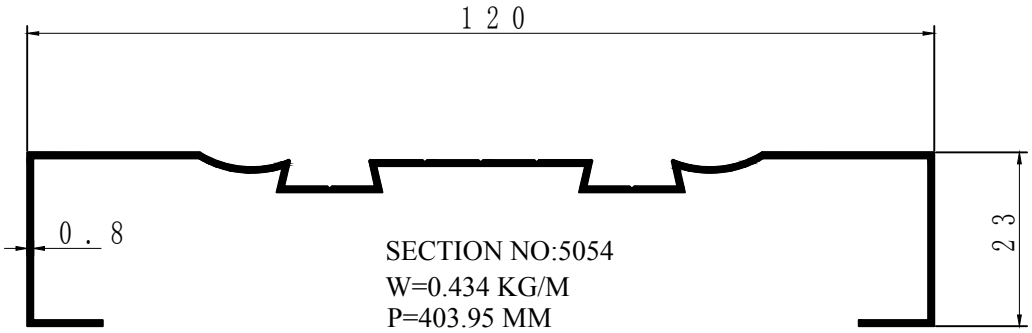


SECTION NO:5054
W=0.434 KG/M
P=403.95 MM

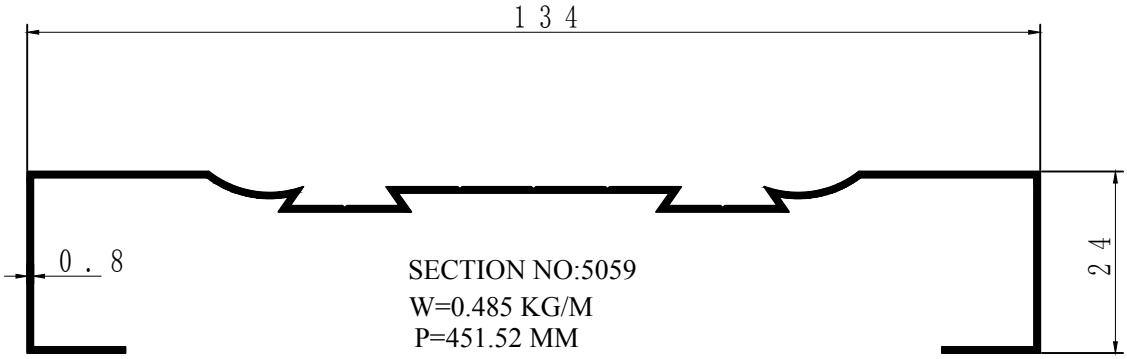



SECTION NO:5059
W=0.485 KG/M
P=451.52 MM

## SHOW CASES Group XIII - 1 (13)





SECTION NO:5072
W=0.431 KG/M
P=459.01 MM


| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 5073 | 0.90 | 0.552 | 457.45 |
| 5074 | 1.00 | 0.613 | 456.70 |

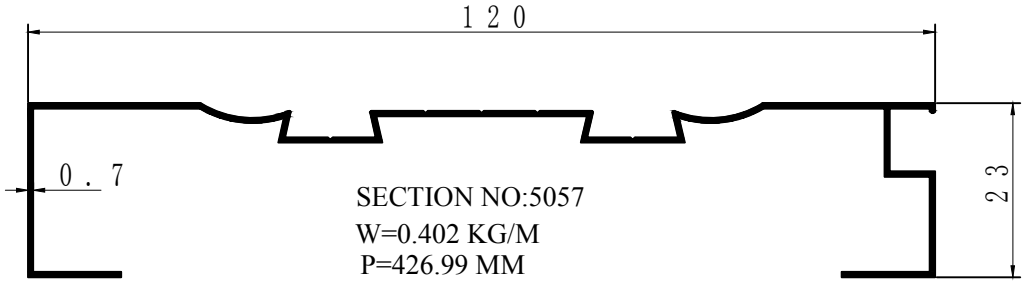


SECTION NO:5057
W=0.402 KG/M
P=426.99 MM

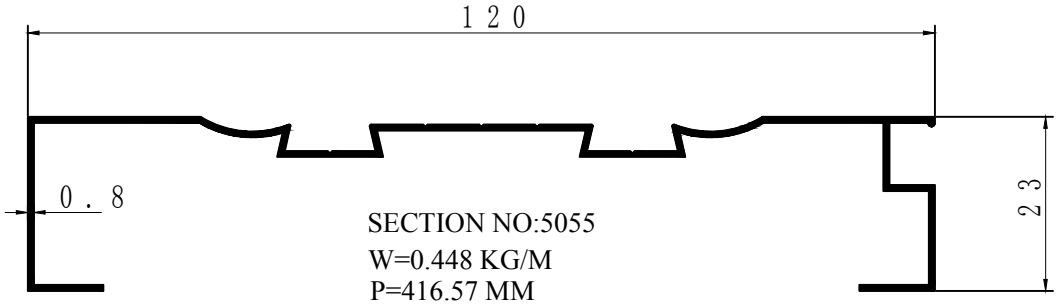



SECTION NO:5055
W=0.448 KG/M
P=416.57 MM

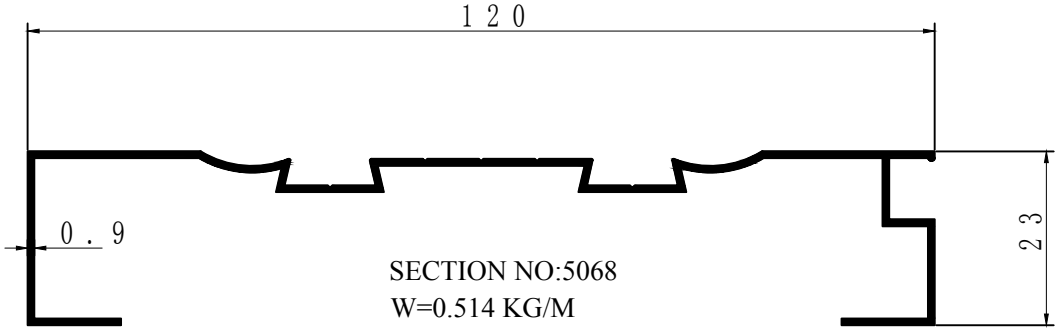


SECTION NO:5068
W=0.514 KG/M


## SHOW CASES Group XIII - 1 (14)

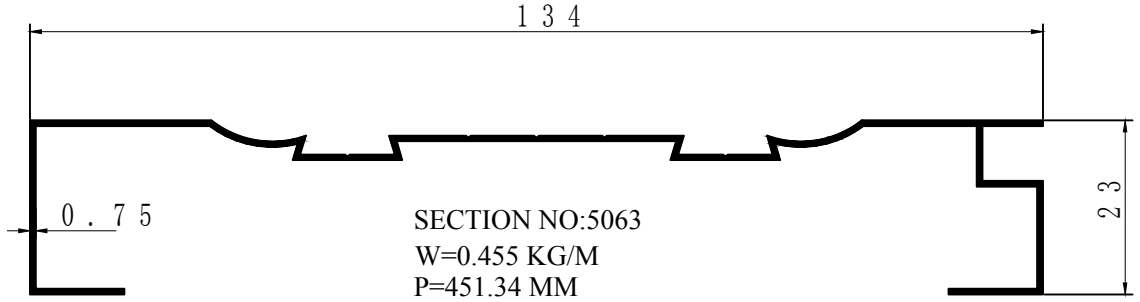



SECTION NO:5063
W=0.455 KG/M
P=451.34 MM





SECTION NO:5070
W=0.446 KG/M
P=473.68 MM

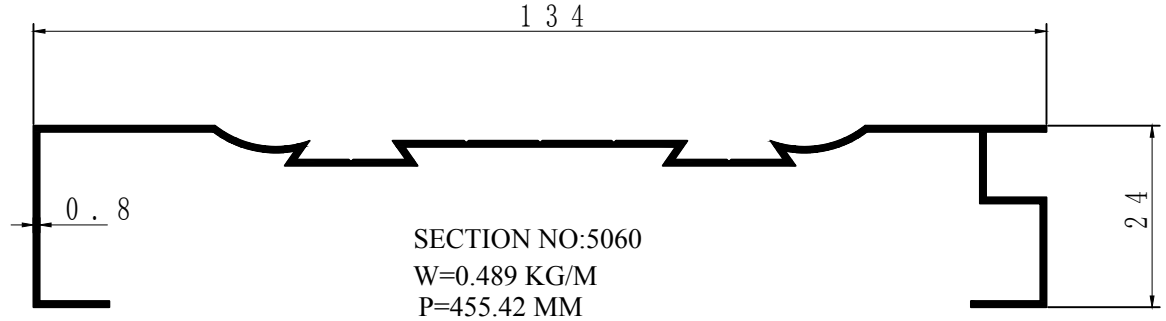


SECTION NO:5060
W=0.489 KG/M
P=455.42 MM

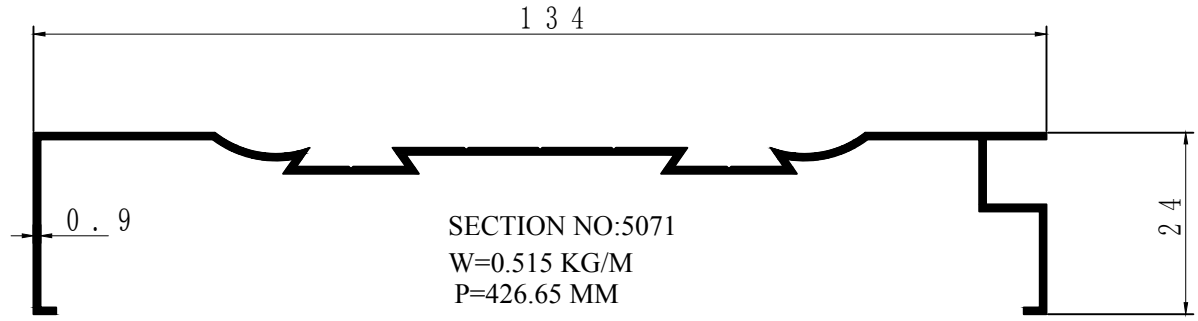



SECTION NO:5071
W=0.515 KG/M
P=426.65 MM

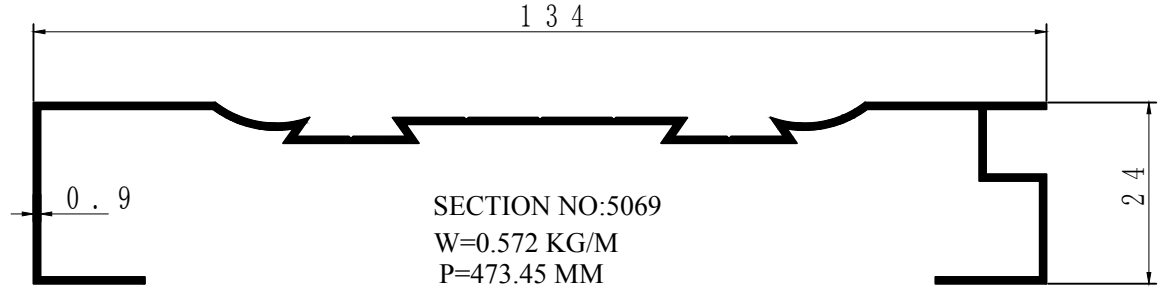



SECTION NO:5069
W=0.572 KG/M
P=473.45 MM


SHOW CASES Group XIII - 1 (15)





SECTION NO:2713
W=0.126 KG/M
P=92.00 MM





SECTION NO:2731
W=0.106 KG/M
P=78.63 MM

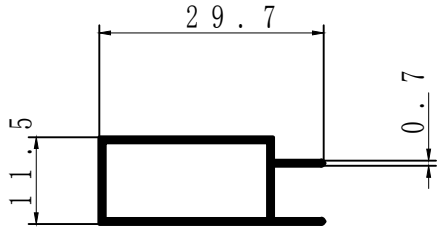


SECTION NO:2750
W = 0.151 KG/M
P = 95.20 MM

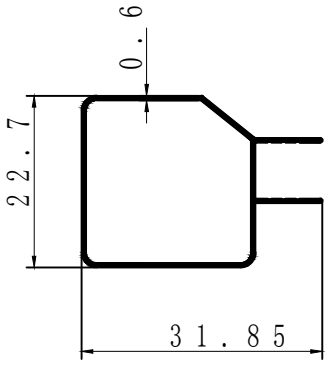



SECTION NO:2743
W=0.163 KG/M
P=121.25 MM

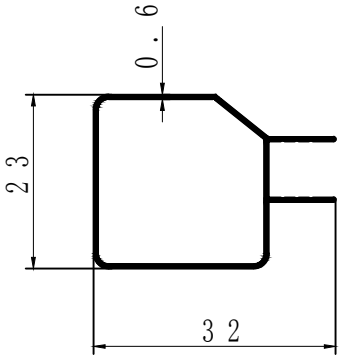


SECTION NO:2744
W=0.165 KG/M
P=123.77 MM


SHOW CASES Group XIII - 1 (16)

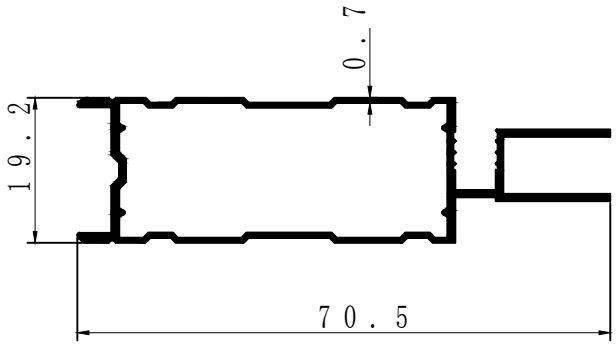



| NO SECTION | T mm | W KG/M | P mm |
|---|---|---|---|
| 0129TB | 0.90 | 0.476 | 239.47 |

SECTION NO:0129
W=0.427 KG/M
P=239.47 MM


## TRIMINGS Group XIV - 1 (1)





SECTION NO:3231
W=0.130 KG/M
P=65.20 MM





SECTION NO:3208
W=0.168 KG/M
P=65.77 MM





SECTION NO:3207
W=0.198 KG/M
P=65.78 MM





SECTION NO:3209
W=0.185 KG/M
P=68.44 MM





SECTION NO:3222
W=0.137 KG/M
P=69.95 MM





SECTION NO:3221
W=0.147 KG/M
P=80.86 MM




SECTION NO:3237
W=0.134 KG/M
P=74.17 MM





SECTION NO:3242
W=0.116 KG/M
P=74.17 MM





SECTION NO:3236
W=0.150 KG/M
P=76.26 MM


TRIMINGS Group XIV - 1 (2)





SECTION NO:3223
W=0.219 KG/M
P=74.58 MM





SECTION NO:3199
W=0.157 KG/M
P=78.24 MM





SECTION NO:3229
W=0.158 KG/M
P=84.32 MM





SECTION NO:3227
W=0.159 KG/M
P=77.88 MM





SECTION NO:3226
W=0.156 KG/M
P=86.34 MM





SECTION NO:3213
W=0.181 KG/M
P=87.94 MM




SECTION NO:3217
W=0.161 KG/M
P=79.49 MM





SECTION NO:3210
W=0.180 KG/M
P=87.14 MM





SECTION NO:3225
W=0.165 KG/M
P=79.49 MM


TRIMINGS Group XIV - 1 (3)





SECTION NO:3211
W=0.190 KG/M
P=81.89 MM





SECTION NO:3218
W=0.154 KG/M
P=84.62 MM





SECTION NO:3216
W=0.192 KG/M
P=94.31 MM





SECTION NO:3214
W=0.196 KG/M
P=93.17 MM





SECTION NO:3212
W=0.196 KG/M
P=93.17 MM





SECTION NO:3215
W=0.216 KG/M
P=87.36 MM




SECTION NO:3204
W=0.226 KG/M
P=95.21 MM





SECTION NO:3203
W=0.245 KG/M
P=95.21 MM





SECTION NO:3224
W=0.150 KG/M
P=78.89 MM


TRIMINGS Group XIV - 1 (4)





SECTION NO:3235
W=0.131 KG/M
P=78.66 MM





SECTION NO:3201
W=0.227 KG/M
P=83.66 MM





SECTION NO:3200
W=0.246 KG/M
P=83.66 MM





SECTION NO:3202
W=0.236 KG/M
P=84.22 MM




SECTION NO:3205
W=0.292 KG/M
P=83.66 MM





SECTION NO:3241
W=0.140 KG/M
P=90.62 MM

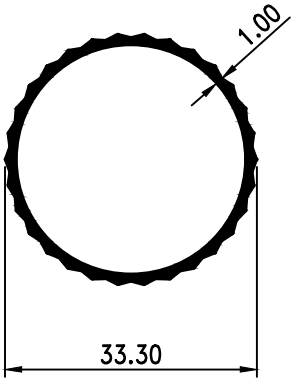



SECTION NO:3228
W=0.332 KG/M
P=107.43 MM


OTHERS Group XV - 1 (1)





SECTION NO:2634R
W=0.398 KG/M
P=87.08 MM

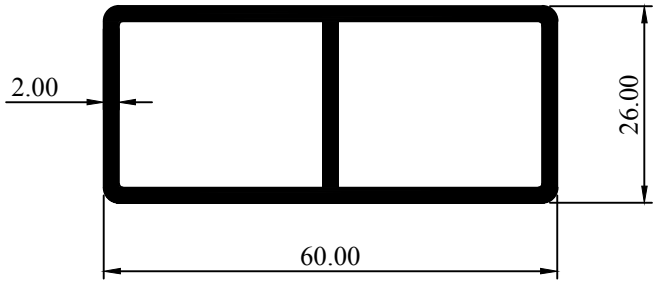



SECTION NO:2661 BR
W=0.999 KG/M
P=168.56 MM

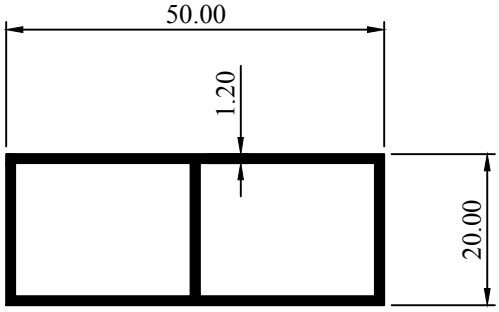


SECTION NO:2659
W=0.497 KG/M
P=140.00 MM

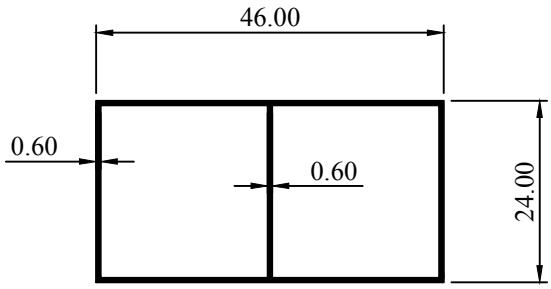



SECTION NO:2661KN
W=0.261 KG/M
P=140.00 MM

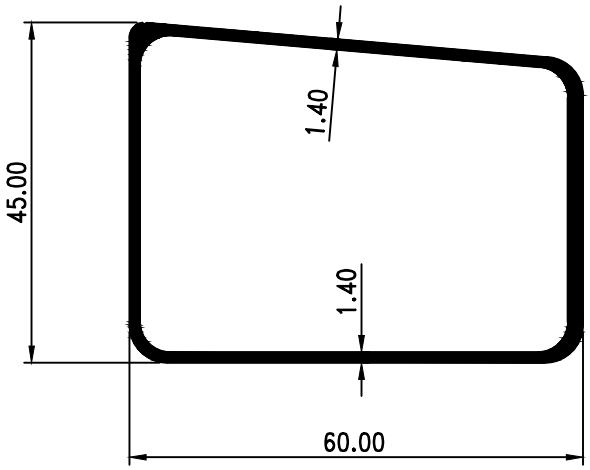



SECTION NO:96751
W=0.812 KG/M
P=299.73 MM

OTHERS Group XV - 1 (2)




SECTION NO:2237G
W=0.371 KG/M
P=78.54 MM

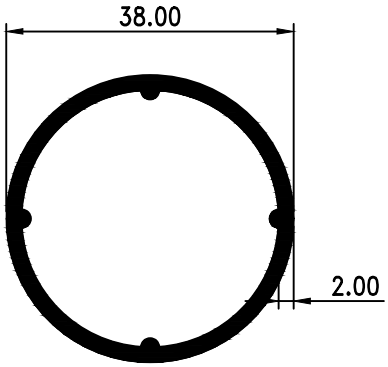



SECTION NO:2238G
W=0.637 KG/M
P=119.38 MM


OTHERS Group XV - 1 (3)

| SECTION | A MM | B MM | T MM | W KG/M | P MM | REMARK | APLICATION |
|---|---|---|---|---|---|---|---|
| 1046 | 13.00 | - | 0.70 | 0.048 | 52.00 | | EQUAL ANGLE |
| 1047 | 16.00 | - | 0.70 | 0.059 | 64.00 | | EQUAL ANGLE |
| 1048 | 20.00 | - | 0.70 | 0.075 | 80.00 | | EQUAL ANGLE |
| 1049 | 25.00 | - | 0.70 | 0.095 | 101.17 | | EQUAL ANGLE |
| 1050 | 32.00 | - | 0.70 | 0.120 | 127.57 | | EQUAL ANGLE |
| 1932 | 8.00 | - | 0.70 | 0.037 | 48.00 | STRIPE | EQUAL CHANNELS |
| 1934 | 7.00 | - | 0.70 | 0.037 | 40.60 | STRIPE | EQUAL CHANNELS |
| 1935 | 9.00 | - | 0.70 | 0.042 | 52.28 | | EQUAL CHANNELS |
| 1936 | 7.00 | - | 0.70 | 0.037 | 40.28 | | EQUAL CHANNELS |
| 2400 | 7.00 | - | 0.70 | 0.048 | 28.00 | | SQUARE HOLLOW |
| 2401 | 9.00 | - | 0.70 | 0.063 | 36.00 | | SQUARE HOLLOW |
| 2402 | 10.00 | - | 0.70 | 0.071 | 40.00 | | SQUARE HOLLOW |
| 2403 | 14.00 | - | 0.70 | 0.101 | 56.00 | | SQUARE HOLLOW |
| 2404 | 13.00 | - | 0.70 | 0.093 | 52.00 | | SQUARE HOLLOW |
| 2405 | 15.00 | - | 0.70 | 0.109 | 60.00 | | SQUARE HOLLOW |
| 2406 | 22.50 | - | 0.70 | 0.165 | 90.00 | | SQUARE HOLLOW |
| 2407 | 23.00 | - | 0.70 | 0.169 | 92.00 | | SQUARE HOLLOW |
| 2408 | 19.00 | - | 0.70 | 0.139 | 76.00 | | SQUARE HOLLOW |
| 2688 | 13.00 | 08.00 | 0.70 | 0.074 | 42.00 | | RECTANGULAR HOLLOW |
| 2690 | 16.00 | 10.00 | 0.70 | 0.093 | 52.00 | | RECTANGULAR HOLLOW |
| 2691 | 14.00 | 10.00 | 0.70 | 0.086 | 48.00 | | RECTANGULAR HOLLOW |
| 2692 | 17.00 | 10.00 | 0.70 | 0.097 | 54.00 | | RECTANGULAR HOLLOW |
| 2693 | 19.00 | 10.00 | 0.70 | 0.105 | 58.00 | | RECTANGULAR HOLLOW |
| 2694 | 28.00 | 18.00 | 0.70 | 0.169 | 92.00 | | RECTANGULAR HOLLOW |
| 2695 | 20.00 | 10.00 | 0.70 | 0.109 | 60.00 | | RECTANGULAR HOLLOW |
| 2696 | 31.00 | 21.00 | 0.70 | 0.192 | 104.00 | | RECTANGULAR HOLLOW |
| 2697 | 34.50 | 23.00 | 0.70 | 0.213 | 115.00 | | RECTANGULAR HOLLOW |
| 2698 | 46.00 | 23.00 | 0.70 | 0.256 | 138.00 | | RECTANGULAR HOLLOW |
| 2699 | 46.00 | 24.00 | 0.70 | 0.260 | 140.00 | | RECTANGULAR HOLLOW |

KITCHEN SET Group XVI - 1 (1)

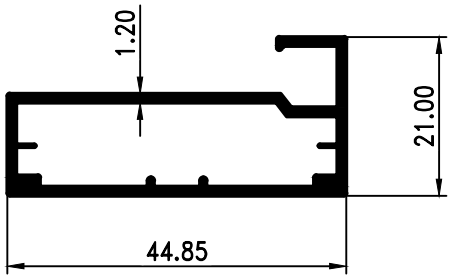


SECTION NO : 95024
W = 0.454 KG/M
P = 150.37 MM

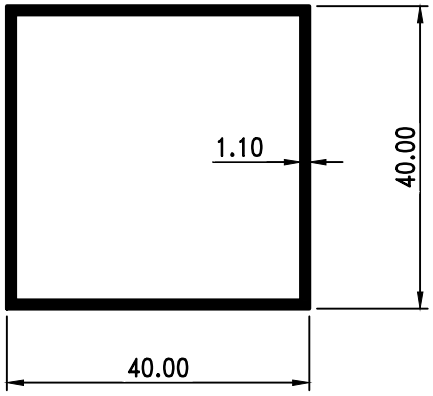


SECTION NO : 2578C
W = 0.464 KG/M
P = 160.00 MM