

1.First execute tbl_product.sql these sql commands in mysql server

--

-- Database: `testing`

CREATE DATABASE testing;

--

-- -----

--

-- Table structure for table `tbl_product`

--

CREATE TABLE IF NOT EXISTS `tbl_product` (

`id` int(11) NOT NULL AUTO_INCREMENT,

`name` varchar(255) NOT NULL,

`image` varchar(255) NOT NULL,

`price` double(10,2) NOT NULL,

PRIMARY KEY (`id`)

) ENGINE=MyISAM DEFAULT CHARSET=latin1 AUTO_INCREMENT=10 ;

--

-- Dumping data for table `tbl_product`

--

INSERT INTO `tbl_product` (`id`, `name`, `image`, `price`) VALUES

(1, 'Abdominal wheel', '12.jpg', 100.00),

(2, 'Weight Lifiting', '11.jpg', 299.00),

(3, 'Tread Mill', '10.jpg', 125.00);

```

/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;

/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;

/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;

```

```

1
2  --
3  -- Database: `testing`
4  CREATE DATABASE testing;|
5  --
6
7  -- -----
8
9  --
10 -- Table structure for table `tbl_product`
11 --
12
13 CREATE TABLE IF NOT EXISTS `tbl_product` (
14   `id` int(11) NOT NULL AUTO_INCREMENT,
15   `name` varchar(255) NOT NULL,
16   `image` varchar(255) NOT NULL,
17   `price` double(10,2) NOT NULL,
18   PRIMARY KEY (`id`)
19 ) ENGINE=MyISAM DEFAULT CHARSET=latin1 AUTO_INCREMENT=10 ;
20
21 --
22 -- Dumping data for table `tbl_product`
23 --
24
25 INSERT INTO `tbl_product` (`id`, `name`, `image`, `price`) VALUES
26 (1, 'Abdominal wheel', '12.jpg', 100.00),
27 (2, 'Weight Lifting', '11.jpg', 299.00),
28 (3, 'Tread Mill', '10.jpg', 125.00);
29
30 /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
31 /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
32 /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
33

```

2.Run the index.php file

```
<?php
```

```
session_start();
```

```
$connect = mysqli_connect("localhost", "root", "", "testing");
```

```
if(isset($_POST["add_to_cart"]))
```

```
{
```

```
    if(isset($_SESSION["shopping_cart"]))
```

```
    {
```

```
        $item_array_id = array_column($_SESSION["shopping_cart"], "item_id");
```

```

if(!in_array($_GET["id"], $item_array_id))
{
    $count = count($_SESSION["shopping_cart"]);
    $item_array = array(
        'item_id'            =>    $_GET["id"],
        'item_name'          =>    $_POST["hidden_name"],
        'item_price'         =>    $_POST["hidden_price"],
        'item_quantity'     =>    $_POST["quantity"]
    );
    $_SESSION["shopping_cart"][$count] = $item_array;
}
else
{
    echo '<script>alert("Item Already Added")</script>';
}
}
else
{
    $item_array = array(
        'item_id'            =>    $_GET["id"],
        'item_name'          =>    $_POST["hidden_name"],
        'item_price'         =>    $_POST["hidden_price"],
        'item_quantity'     =>    $_POST["quantity"]
    );
    $_SESSION["shopping_cart"][0] = $item_array;
}
}

if(isset($_GET["action"]))
{
    if($_GET["action"] == "delete")

```

```

{
    foreach($_SESSION["shopping_cart"] as $keys => $values)
    {
        if($values["item_id"] == $_GET["id"])
        {
            unset($_SESSION["shopping_cart"][$keys]);
            echo '<script>alert("Item Removed")</script>';
            echo '<script>window.location="index.php"</script>';
        }
    }
}

?>
<!DOCTYPE html>
<html>
    <head>
        <title>Simple PHP Mysql GYM Shopping Cart</title>
        <script
src="https://ajax.googleapis.com/ajax/libs/jquery/2.2.0/jquery.min.js"></script>
        <link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.6/css/bootstrap.min.css" />
        <script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.6/js/bootstrap.min.js"></script>
    </head>
    <body>
        <br />
        <div class="container">
            <br />
            <br />
            <br />

```

```

Cart</h3><br />

<br /><br />

<?php
    $query = "SELECT * FROM tbl_product ORDER BY id ASC";
    $result = mysqli_query($connect, $query);
    if(mysqli_num_rows($result) > 0)
    {
        while($row = mysqli_fetch_array($result))
        {
            ?>

<div class="col-md-4">

    <form method="post" action="index.php?action=add&id=<?php
echo $row["id"]; ?>">

        <div style="border:1px solid #333; background-
color:#f1f1f1; border-radius:5px; padding:16px;" align="center">

            "
class="img-responsive" /><br />

            <h4 class="text-info"><?php echo $row["name"];
?></h4>

            <h4 class="text-danger">$ <?php echo
$row["price"]; ?></h4>

            <input type="text" name="quantity" value="1"
class="form-control" />

            <input type="hidden" name="hidden_name"
value="<?php echo $row["name"]; ?>" />

            <input type="hidden" name="hidden_price"
value="<?php echo $row["price"]; ?>" />

```

```
                <input type="submit" name="add_to_cart"
style="margin-top:5px;" class="btn btn-success" value="Add to Cart" />
```

```
            </div>
```

```
        </form>
```

```
    </div>
```

```
<?php
```

```
    }
```

```
    }
```

```
?>
```

```
<div style="clear:both"></div>
```

```
<br />
```

```
<h3>Order Details</h3>
```

```
<div class="table-responsive">
```

```
    <table class="table table-bordered">
```

```
        <tr>
```

```
            <th width="40%">Item Name</th>
```

```
            <th width="10%">Quantity</th>
```

```
            <th width="20%">Price</th>
```

```
            <th width="15%">Total</th>
```

```
            <th width="5%">Action</th>
```

```
        </tr>
```

```
        <?php
```

```
        if(!empty($_SESSION["shopping_cart"]))
```

```
        {
```

```
            $total = 0;
```

```
            foreach($_SESSION["shopping_cart"] as $keys =>
```

```
$values)
```

```
            {
```

```
        ?>
```

```
        <tr>
```

```
            <td><?php echo $values["item_name"]; ?></td>
```


```
 <?php echo $values["item_quantity"]; ?></td>   <?php echo $values["item_price"]; ?></td>   <?php echo number_format($values["item_quantity"] * $values["item_price"], 2);?></td>   <a href="index.php?action=delete&id=<?php echo $values["item_id"]; ?>"><span class="text-danger">Remove</span></a></td>  </tr>  <?php  $total = $total + ($values["item_quantity"] * $values["item_price"]);  }  ?>  <tr>    | | | | | | |
```

```

/*function array_column($array, $column_name)
{
    $output = array();
    foreach($array as $keys => $values)
    {
        $output[] = $values[$column_name];
    }
    return $output;
}*/
?>

```

Tutorial - Simple PHP Mysql GYM Shopping Cart

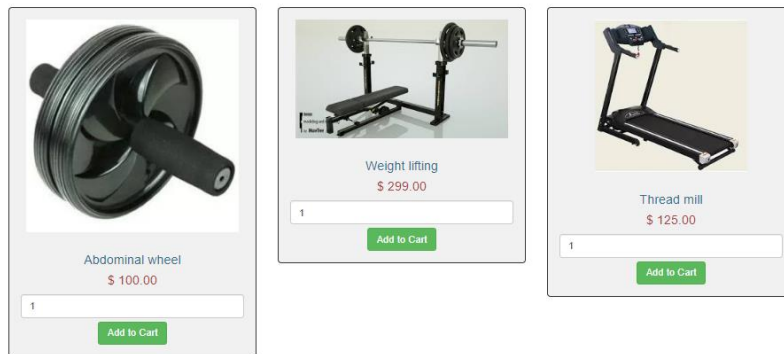


Order Details

Item Name	Quantity	Price	Total	Action
-----------	----------	-------	-------	--------

3. Here we haven't added any item into cart initially once we add they will get added here.

Tutorial - Simple PHP Mysql GYM Shopping Cart

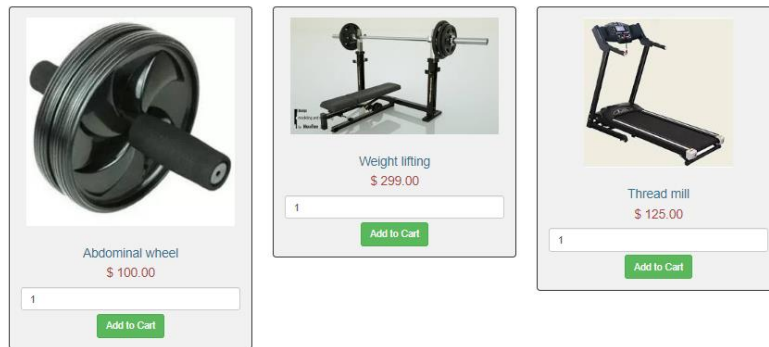

Order Details

Item Name	Quantity	Price	Total	Action
Abdominal wheel	1	\$ 100.00	\$ 100.00	Remove
Weight lifting	3	\$ 299.00	\$ 897.00	Remove
Thread mill	4	\$ 125.00	\$ 500.00	Remove
Total			\$ 1,497.00	

4.github link : <https://github.com/LPUBhimeswar/GYM-store-php-project>