Open Universiteit

OU Beamer Template

A short example presentation

Your Name
October 28, 2026
Open University of the Netherlands

Outline

1. **Motivation**
   Why the question matters and what is being investigated.
2. **Method**
   A compact description of the model, data, or experiment.
3. **Results**
   The main quantitative findings and their interpretation.
4. **Discussion**
   Limitations, assumptions, and possible extensions.

Single-column text

This is a normal text slide. Use short paragraphs and avoid overloading the slide with detailed prose. Inline mathematics such as $E = mc^2$ and quantities such as 3.5 MW are typeset consistently.


The OU theme defines the title area, logo mark, and footer automatically. Most slides can therefore remain very simple in their source code.

Columns and short lists

Left column

- Use columns for comparisons.
- Keep lists short.
- Prefer readable slides over dense slides.

Right column

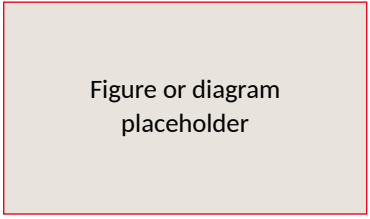

Equations and units

A short derivation is often clearer than a dense list of equations. The example below uses `siunitx` for units.

$$\begin{aligned} P &= \tau\omega \\ \tau &= Fr \\ P &= Fr\omega \end{aligned} \tag{1}$$

For example, with $F = 50\,\mathrm{kN}$, $r = 2\,\mathrm{m}$, and $\omega = 6\,\mathrm{rad\,s^{-1}}$, the resulting power is $P = 600\,\mathrm{kW}$.

Compact table

Case	Capacity	Comment
Baseline	2.4 GW	reference case
Scenario A	2.8 GW	moderate increase
Scenario B	3.1 GW	strong increase

Table 1: A compact table using `booktabs`.

Changing the frame colour

This frame uses the per-frame option `framecolor=OUAccent3`. The accent colour returns to the default on the next frame.

Useful for section changes

Changing the frame colour can help mark exercises, interludes, case studies, or discussion slides without changing the whole presentation theme.

Back to the default colour

The accent colour is again `OUPrimary`, because `framecolor` is local to the frame.

Example block

Blocks can be used for definitions, assumptions, or short conclusions.

Default layout: `rightfootline,leftlogo`

By default, the footer is placed on the right side of the frame and the OU logo mark is placed on the left side of the title area.

This corresponds to the implicit frame options `rightfootline,leftlogo`.

Using `leftfootline`

This frame uses the `leftfootline` option to move only the footer content to the left side of the frame.

The logo remains on the default left side, because footer placement and logo placement are controlled independently.

Using `rightlogo`

This frame uses the `rightlogo` option to move only the logo mark to the right side of the title area.

The footer remains on the default right side, because logo placement and footer placement are controlled independently.

Combining `leftfootline` and `rightlogo`

This frame uses `leftfootline,rightlogo`. The footer is placed on the left side, while the logo mark is placed on the right side.

This is useful when a figure or a diagram needs more space in one of the title-area corners.



Using `nofootline`

This frame uses the `nofootline` option. The footer bar, page number, and optional short title are removed.

The logo mark remains visible, because `nofootline` does not affect the logo.

Using `nologo`

This frame uses the `nologo` option. The logo mark is removed from the title area.

The footer remains visible, because `nologo` does not affect the footline.

Using `nofootline` and `nologo`

This frame combines `nofootline,nologo`. Both the footer and the logo mark are removed. This can be useful for full-frame figures, diagrams, or interlude slides.

Combining layout and colour

This frame combines several OU per-frame options:

```
framecolor=OUAccent3,leftfootline,rightlogo
```

The accent colour, footer placement, and logo placement are all local to this frame.

A journal source with a DOI link

The numbered citation sits beside the footer banner. Its journal, volume, issue, and pages link to the DOI; the full entry appears in Sources.

[1] Hunter (2007). Matplotlib: A 2D graphics environment. *Computing in Science & Engineering*, *9*(3), 90–95

Three sources on one slide

Three numbered citations fit beside the left footer banner. The repeated Matplotlib entry keeps number [1]; SciPy and NumPy receive [2] and [3].

[1] Hunter (2007). Matplotlib: A 2D graphics environment. *Computing in Science & Engineering*, *9*(3), 90–95
[2] Virtanen et al. (2020). SciPy 1.0: Fundamental algorithms for scientific computing in Python. *Nature Methods*, *17*(3), 261–272
[3] Harris et al. (2020). Array programming with NumPy. *Nature*, *585*(7825), 357–362

Do you need a particular feature?

If a particular feature is missing from the template, write to leonardo.rydin.gorjao@ou.nl.

Backup slide

Backup slides can contain additional derivations, sensitivity analyses, or supporting figures.

Sources I

[1] Hunter, J. D. (2007). Matplotlib: A 2D graphics environment. *Computing in Science & Engineering*, *9*(3), 90–95. https://doi.org/10.1109/MCSE.2007.55

[2] Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D., Burovski, E., Peterson, P., Weckesser, W., Bright, J., van der Walt, S. J., Brett, M., Wilson, J., Millman, K. J., Mayorov, N., Nelson, A. R. J., Jones, E., Kern, R., Larson, E., … SciPy 1.0 Contributors. (2020). SciPy 1.0: Fundamental algorithms for scientific computing in Python. *Nature Methods*, *17*(3), 261–272. https://doi.org/10.1038/s41592-019-0686-2

[3] Harris, C. R., Millman, K. J., van der Walt, S. J., Gommers, R., Virtanen, P., Cournapeau, D., Wieser, E., Taylor, J., Berg, S., Smith, N. J., Kern, R., Picus, M., Hoyer, S., van Kerkwijk, M. H., Brett, M., Haldane, A., Fernández del Río, J., Wiebe, M., Peterson, P., … Oliphant, T. E. (2020). Array programming with NumPy. *Nature*, *585*(7825), 357–362. https://doi.org/10.1038/s41586-020-2649-2