Angular nonlinear evaluation: dataflow and transform accounting

Input reconstruction and final radial projection lie outside these paths.

Galerkin: separate transforms

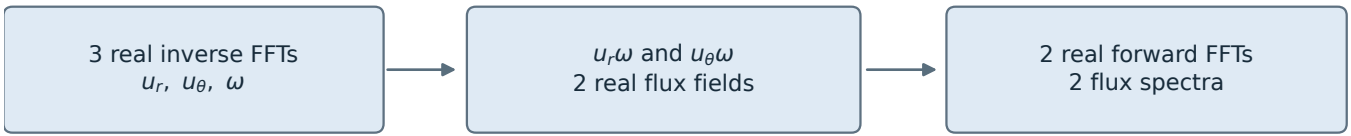

Five logical field transforms; intermediate real arrays in global storage

FD: separate transforms

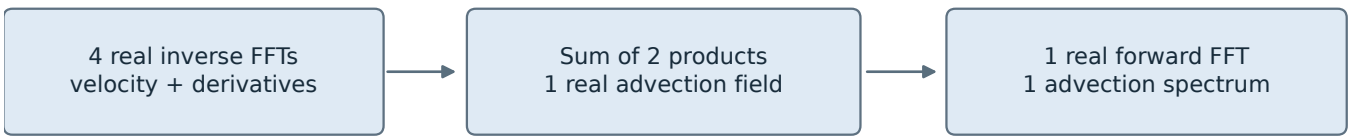

Five logical field transforms; intermediate real arrays in global storage

Specialized fusion: one CUDA block per radial row

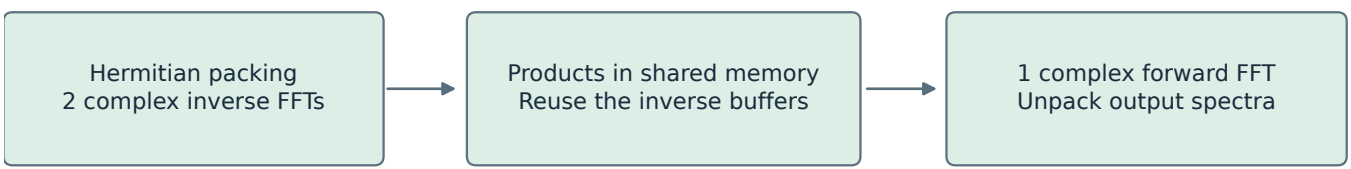

Three internal complex transforms implement the same five logical field transforms.