

# Application Layer Protocols

Course Code: CSC 3116

Course Title: Computer Networks




**Dept. of Computer Science**  
**Faculty of Science and Technology**

|                             |                                                |                 |  |                  |                   |
|-----------------------------|------------------------------------------------|-----------------|--|------------------|-------------------|
| <b>Lecturer No:</b>         | <b>2</b>                                       | <b>Week No:</b> |  | <b>Semester:</b> | <b>Fall 25-26</b> |
| <b>Assistant Professor:</b> | Dr. Rajarshi Roy Chowdhury (rajarshi@aiub.edu) |                 |  |                  |                   |


# Lecture Outline



1. Different layers of Protocol
2. Protocol Types
3. HTTP
4. DNS

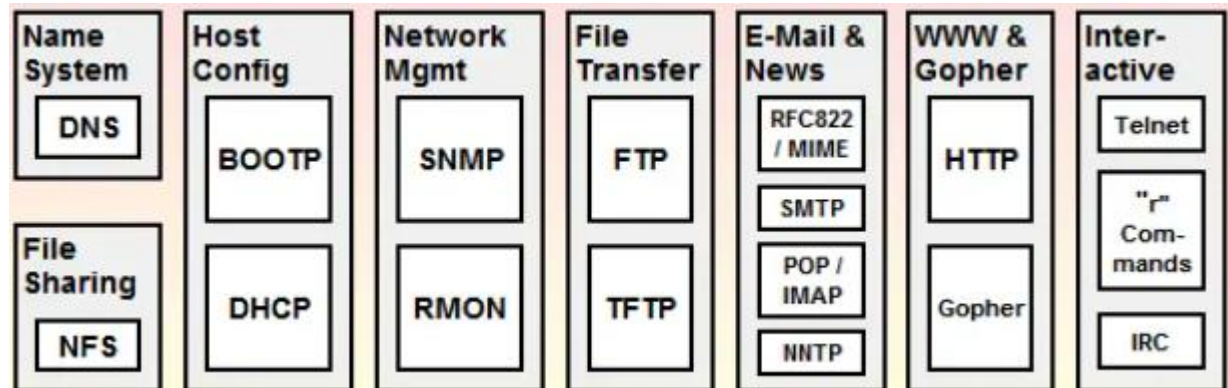

# Network

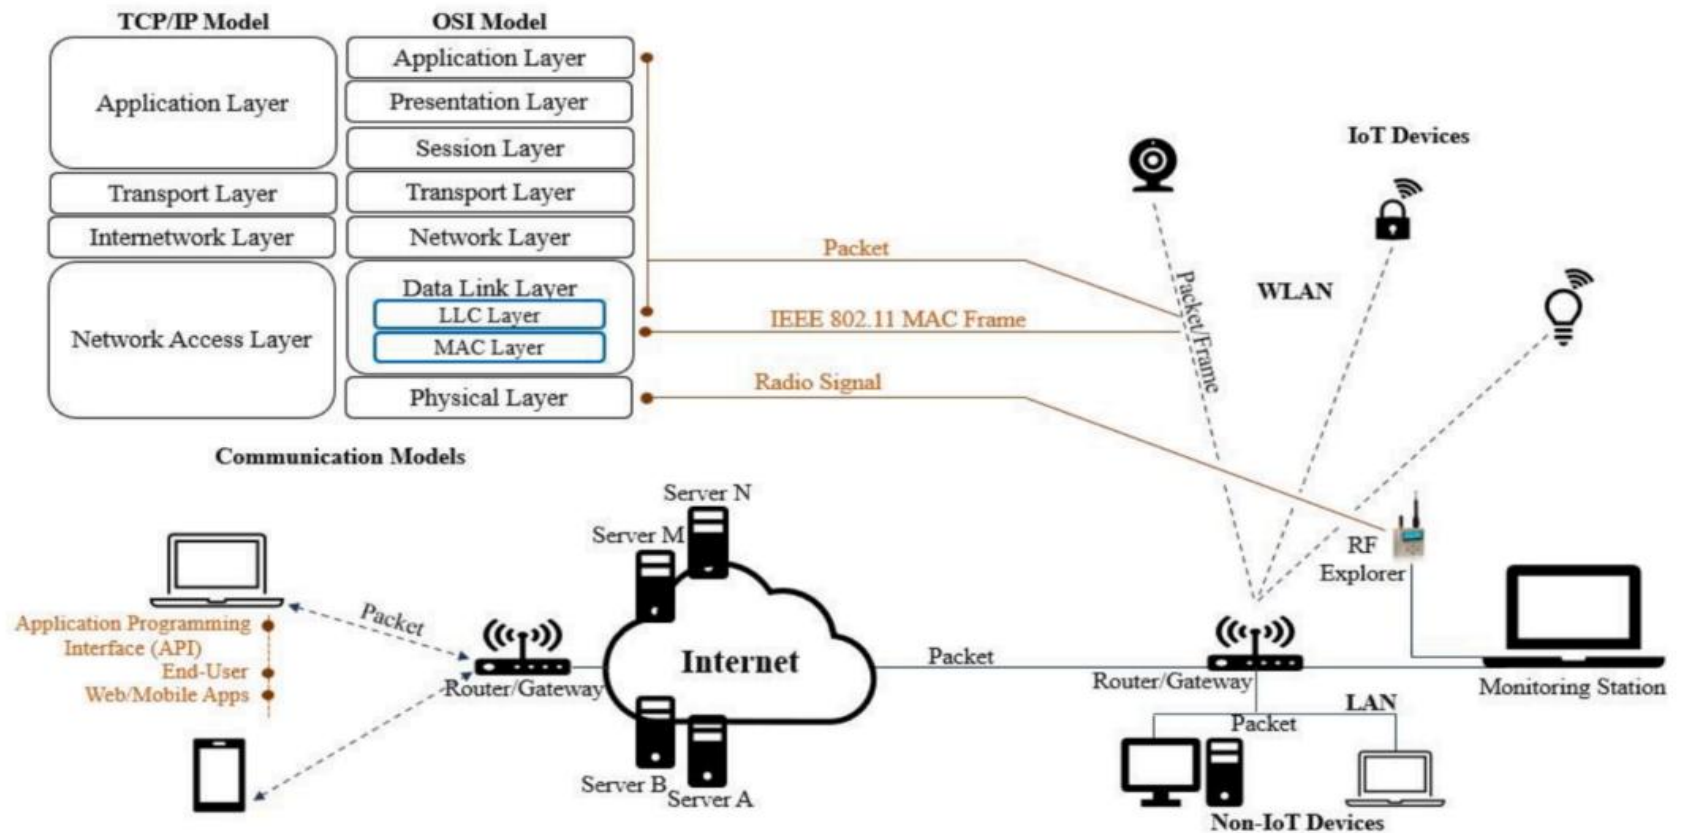

# What is Protocol?



**Protocol:** In computer networks, communication occurs between entities in different systems. However, two entities can not simply send bit streams to each other and expect to be understood. For communication to occur, the entities must agree on a protocol.

**A protocol is a set of rules and conventions that govern data communication between devices over a network.** It defines what is communicated (received-transmitted data), how it is communicated, and when it is communicated.

Example: HTTP, FTP, TCP, IP etc.

# Different Layers Protocol




|          | OSI          | TCP/IP      | Services/Protocols                        | Traffic  |
|----------|--------------|-------------|-------------------------------------------|----------|
| Software | Application  | Application | HTTP, FTP, DNS, Telnet, SSL ....          | Data     |
|          | Presentation |             | ASCII, GIF, MPEG, ...                     |          |
|          | Session      |             | Dialog control, Token Management, ..      |          |
|          | Transport    | Transport   | TCP, UDP                                  | Segments |
|          | Network      | Network     | IP (IPv4 and IPv6), ICMP, IPSec, DHCP ... | Packets  |
| Hardware | Data Link    | Data Link   | Ethernet, Switches, Frame Relay, ...      | Frames   |
|          | Physical     | Physical    | 0101, Hubs, Repeaters, ...                | Bits     |

# Different Layers Protocol



| TCP/IP      | Traffic  |
|-------------|----------|
| Application | Data     |
| Transport   | Segments |
| Network     | Packets  |
| Data Link   | Frames   |
| Physical    | Bits     |

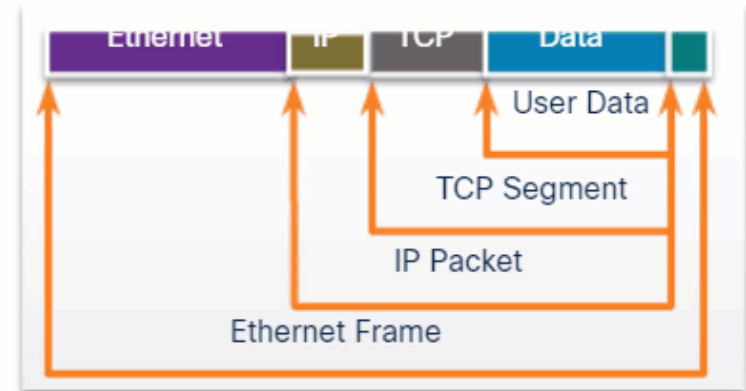

# Protocol Types



**PUSH protocol:** In push protocols, the client **opens a connection to the server and keeps it constantly active**. The **server will send (push) all new events to the client** using that single always-on connection. In other words, the server PUSHes the new events to the client.

**Example:** SMTP, Live streaming

**PULL protocol:** In pull protocols, the client **periodically connects to the server, checks for and gets (pulls) recent events and then closes the connection and disconnects from the server**. The client repeats this whole procedure to get updated about new events. In this mode, the clients periodically PULLs the new events from the server.

**Example:** HTTP, POP3

# Application Layer Protocol: HTTP



HTTP (Hypertext Transfer Protocol) is used across the world wide web (www) for data transfer and is one of the most used application protocols.

HTTP specifies a [request/response protocol](#). When a client, typically a web browser, sends a request message to a server, the [HTTP protocol defines the message types](#) the client uses to request the web page and the message types the server uses to respond

The three common message types are:

- GET
- POST
- PUT

| ↓ GET                     | ✚ POST                                   | ↻ PUT                                                  | ✕ DELETE                | 📊 PATCH                              | 📄 HEAD                          |
|---------------------------|------------------------------------------|--------------------------------------------------------|-------------------------|--------------------------------------|---------------------------------|
| retrieve data from server | add data to an existing file or resource | update(replace) an existing file or resource in server | delete data from server | update a resource partially (modify) | retrieve the resource's headers |




# Application Layer Protocol: HTTP (cont.)



GET: It is a client request for data. A **web browser** sends the **GET** message to **request pages** from a web server. As shown in Figure, when the server receives the GET request, it **responds** with a status line, such as

**HTTP/1.1 200 OK,**

and a message of its own, the body of which can be the requested file, an error message, or some other information.

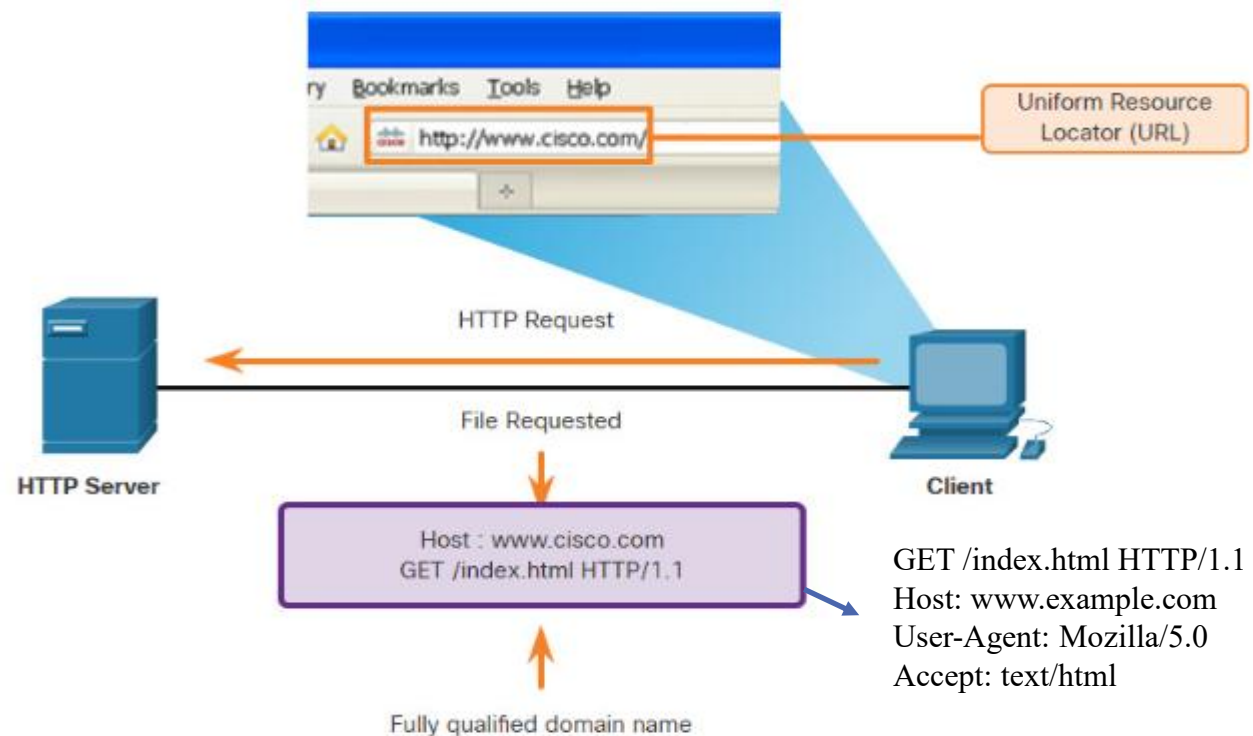

Entering `http://www.cisco.com` in the address bar of a web browser  
Generates the HTTP GET message.

# Application Layer Protocol: HTTP (cont.)




- POST and PUT are used to send messages that upload data to the web server.
- For example, when the user enters data into a **form** embedded in a web page, **POST** includes **the data in the message** sent to the server.
- **PUT uploads resources** or content to the web server.

# Application Layer Protocol: HTTP runs on TCP



- The **transfer protocol** used throughout the World Wide Web is **HTTP**
- TCP provides a **reliable data transfer service** to HTTP, using TCP port 80.
- This implies that
  - each **HTTP request message** emitted by a client process eventually **arrives intact at the server**; similarly,
  - each **HTTP response message** emitted by the server process eventually **arrives intact at the client**.

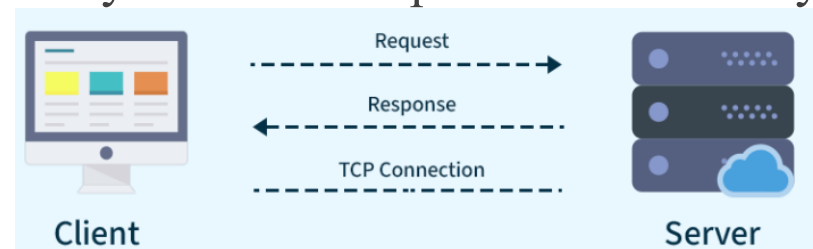

- HTTP need not worry about lost data, or the details of how TCP recovers from loss or reordering of data within the network.
- That is the job of TCP and the protocols in the lower layers of the protocol stack

# Application Layer Protocol: DNS




DNS provides a core Internet function, translating hostnames to their underlying IP addresses, for user applications and other software in the Internet. The DNS protocol defines an automated service that matches resource names with the required numeric network address.


DNS uses a large number of name servers, organized in a hierarchical fashion and distributed around the world. **No one name server has all of the mappings for all of the hosts in the internet.** Instead, the mappings are distributed across the name servers.

There are three types of name servers:

1. **Root name servers**
2. **Local name server**
3. **Authoritative name servers**

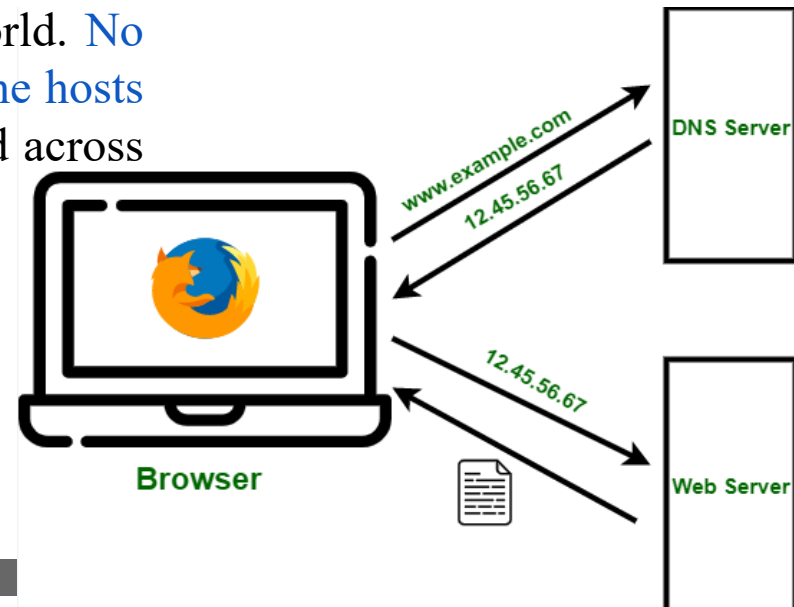

# DNS Hierarchy

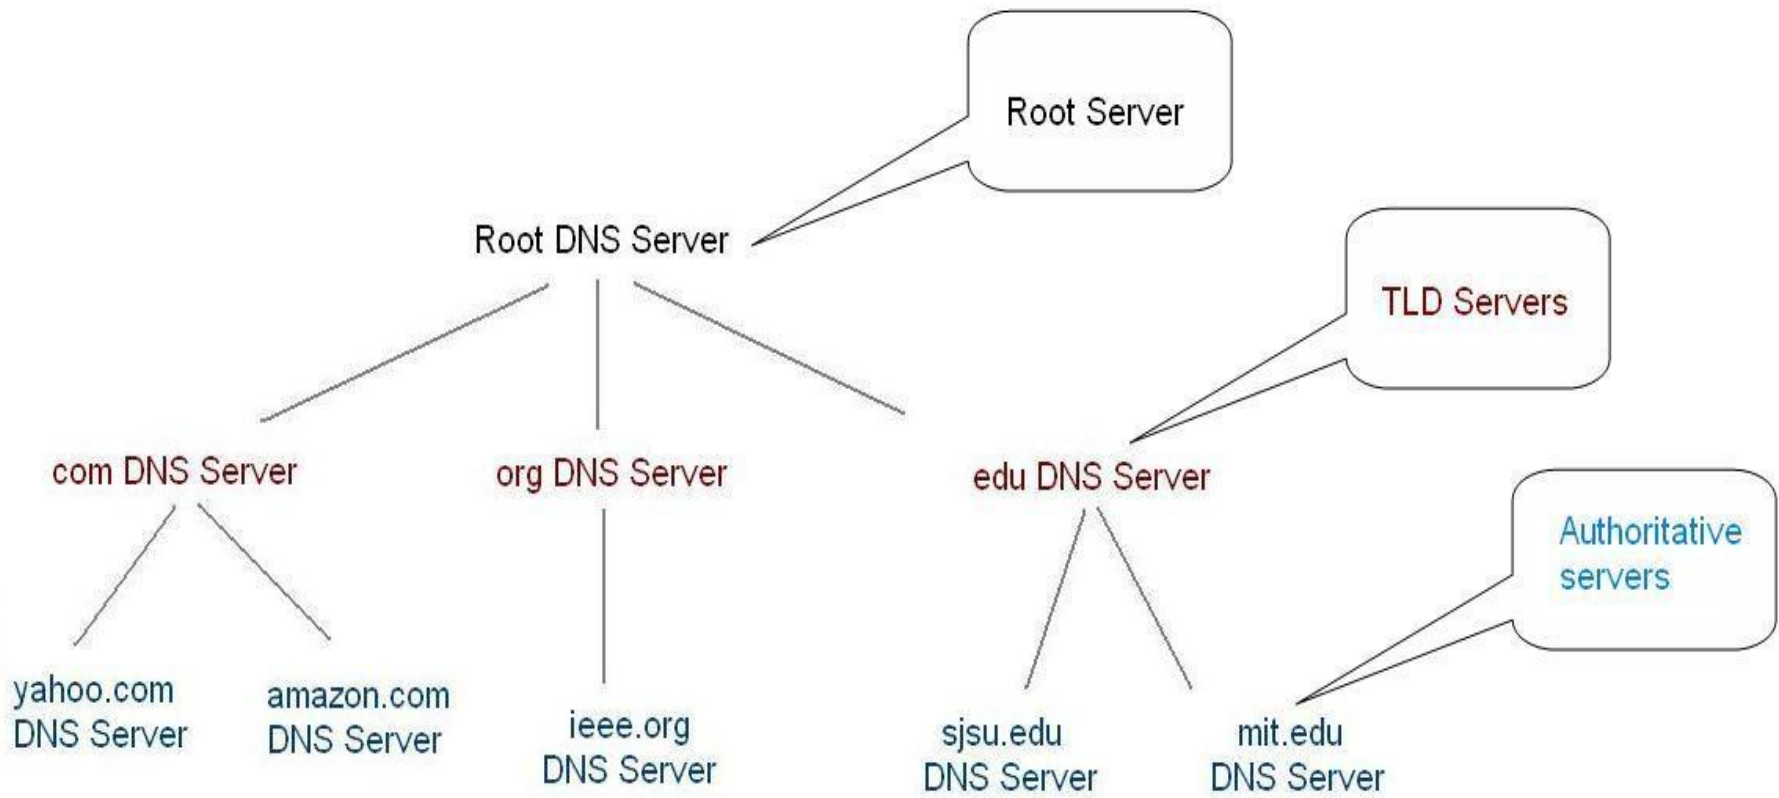

# DNS cont.



**Root name servers:** A root server contains information about the root and top-level domains (TLD), when a local name server cannot immediately satisfy a query from a host (because it does not have a record for the hostname being requested), the local name server behaves as a DNS client and queries one of the root name servers.

**Local name server:** Each ISP - such as a university, an academic department, an employee's company or a residential ISP - has a local name server (also called a [default name server](#)). When a host issues a DNS query message, the message is first sent to the host's local name server. The IP address of the local name server is typically configured by hand in a host.

**Authoritative name servers:** Every host is [registered with an authoritative name server](#). Typically, the authoritative name server for a host is a name server in the host's local ISP. Many name servers act as both local and authoritative name servers.

# Internet Domain Names



As an example, consider a namespace with names of the form:

*local.site*  $\longrightarrow$  server1.example.com  
mail.google.com

where *site* is the site/organization/entity name authorized by the central authority, *local* is the part of a name (subdivision within the site) controlled by the site, and (".") is a delimiter used to separate them.

adding a *group* subdivision to names already partitioned by site produces the following name syntax:

*local. group. site*  $\longrightarrow$  database.it.example.com



# Internet Domain Names (cont.)

Example: **cs.aiub.edu**

contains **three labels**: cs, aiub, and edu.

Any suffix of a label in a domain name is also called a domain.


In the above example the **lowest level domain** is **cs.aiub.edu**, (the domain name for the Computer Science Department at Purdue University), the **second level domain** is **aiub.edu** (the domain name for Purdue University), and the **top-level domain** is **edu** (the domain name for educational institutions).

As the example shows, domain names are written with the lowest label first and the top domain last.





# Internet Domain Names (cont.)

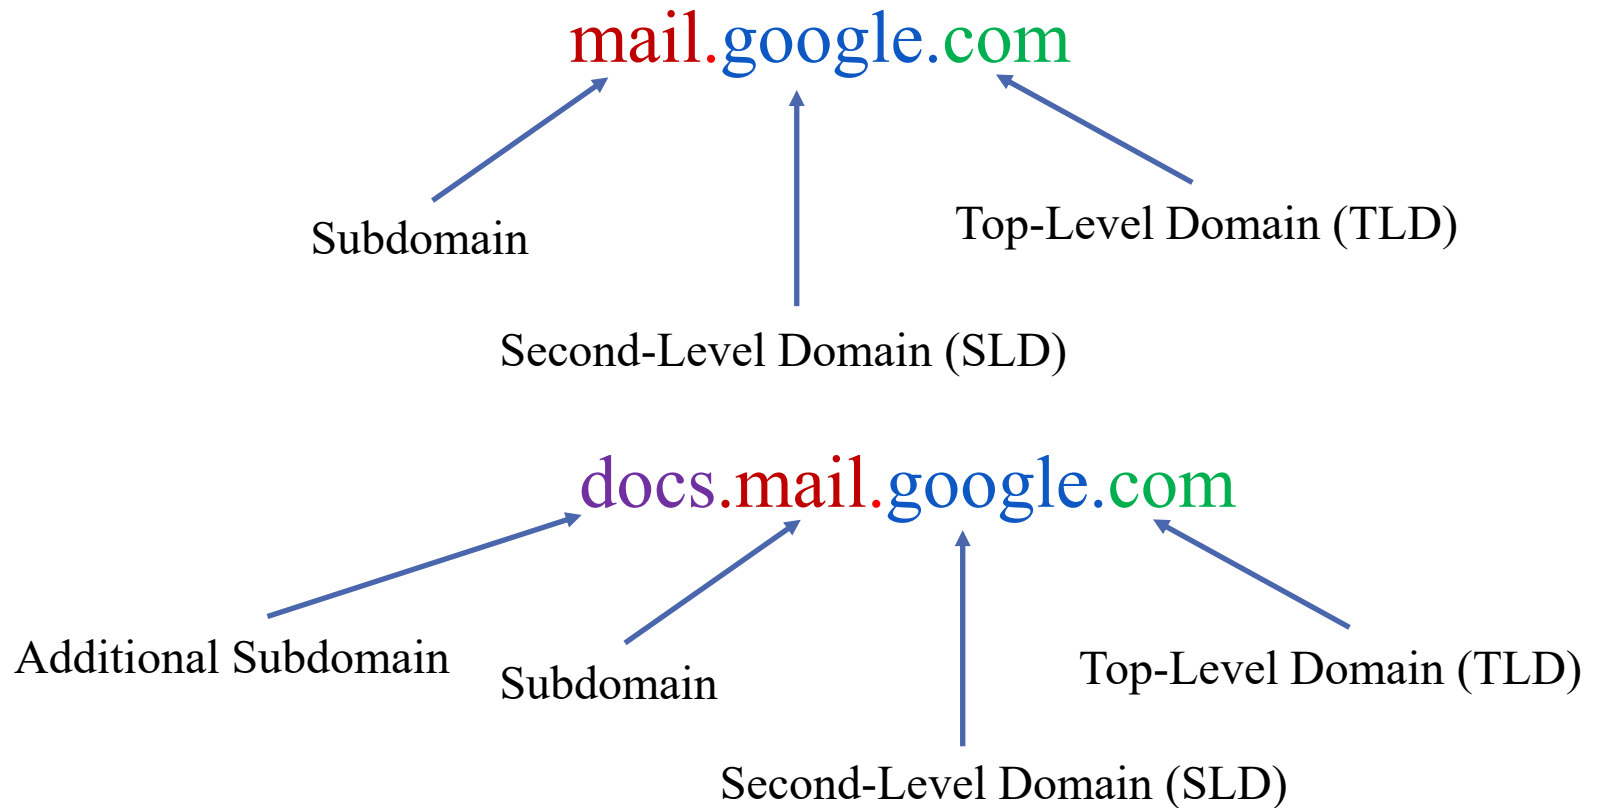





# Internet Domain Names (cont.)

| Domain Name         | Meaning                              |
|---------------------|--------------------------------------|
| COM                 | Commercial organizations             |
| EDU                 | Educational institutions (4-year)    |
| GOV                 | Government institutions              |
| MIL                 | Military groups                      |
| NET                 | Major network support centers        |
| ORG                 | Organizations other than those above |
| ARPA                | Temporary ARPANET domain (obsolete)  |
| INT                 | International organizations          |
| <i>country code</i> | Each country (geographic scheme)     |

# DNS: How it works?

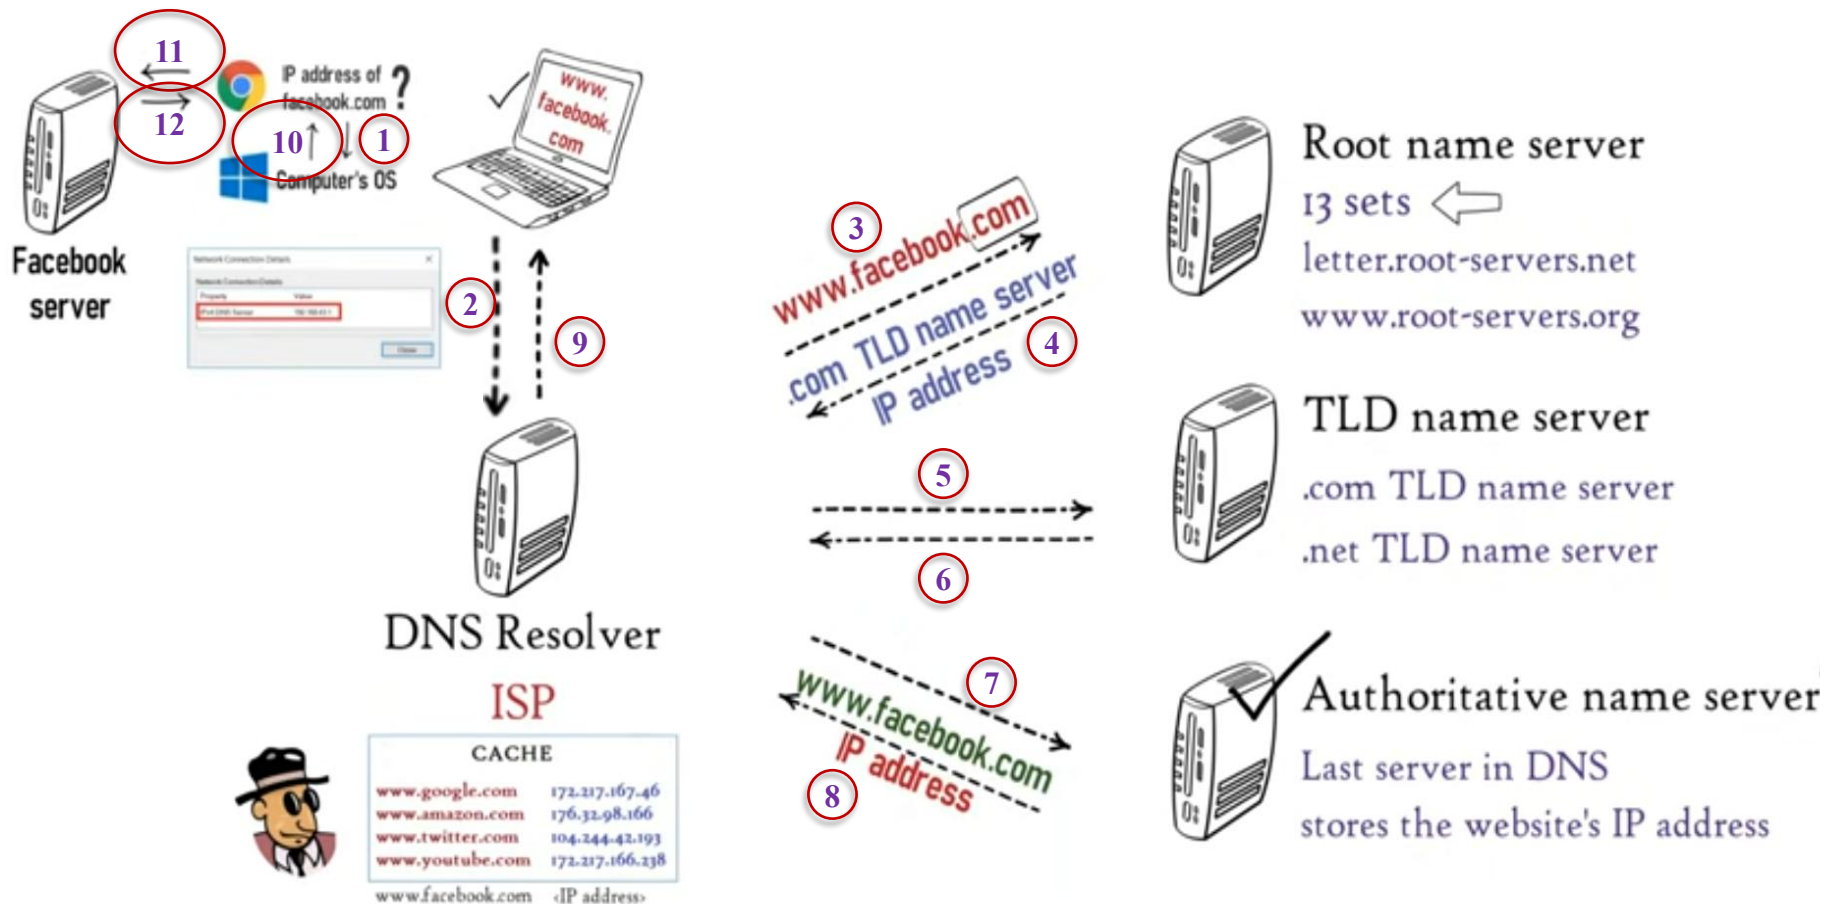

# DNS: How it works?

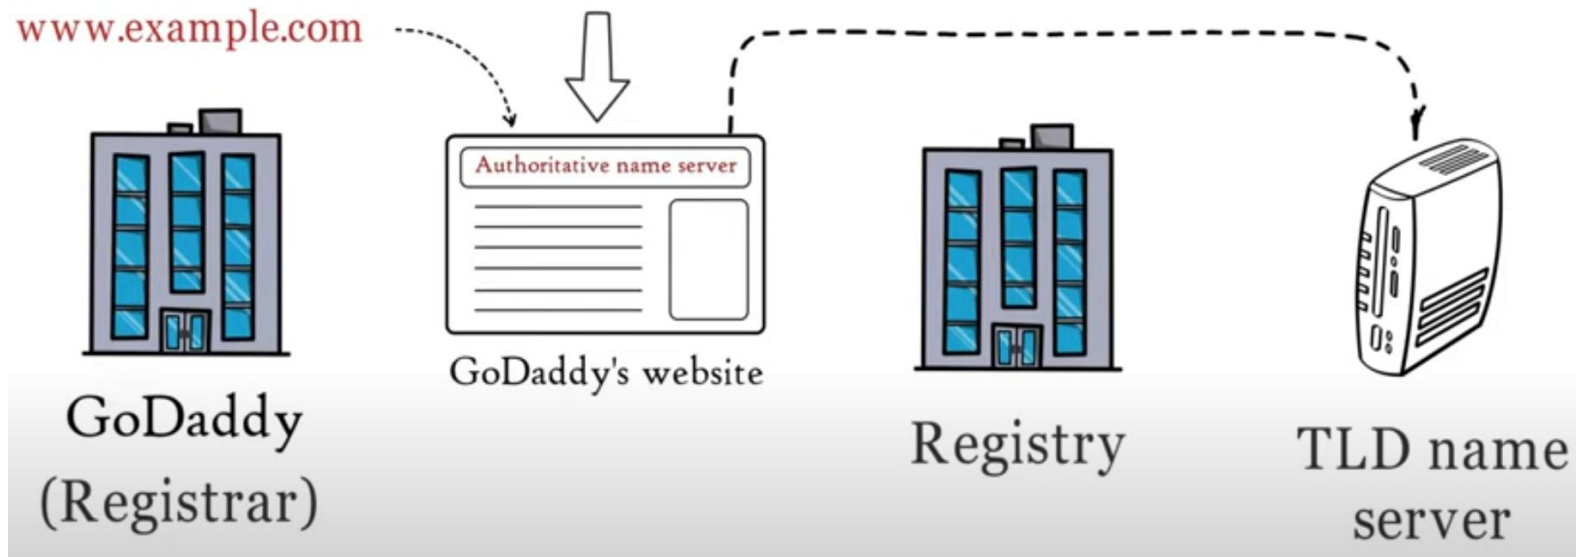



## DNS: How it works?

Example: Hannah want to connect at [www.fredsco.com](http://www.fredsco.com)


1. Hannah opens a browser, types in [www.fredsco.com](http://www.fredsco.com), and sends a DNS resolution request to her DNS (example.com).
2. example.com's DNS doesn't know the name <http://www.fredsco.com>. However, the DNS now has some configuration that tells it that if it doesn't know the name, it should ask the DNS server at IP address 1.1.1.1 (Root server).
3. The DNS server at 1.1.1.1 has a table that lists the IP addresses of a bunch of name servers. DNS server 1.1.1.1 knows that for all names that end in "example.com," DNS 150.1.3.4 can resolve the names. It also knows that for all names that end in "fredsco.com," DNS 199.1.1.3 can resolve the names. Finally, DNS server 1.1.1.1 can direct each request to the right name server. This DNS sends a message back to the example.com DNS, referring it to the DNS at 199.1.1.3.

# DNS: How it works?



4. The example.com DNS repeats the name resolution request, now sending the request to the DNS server at Fredsco (199.1.1.3).
5. The Fredsco DNS gets the request, and it knows the name and IP address. It sends a reply to the requesting host, namely, example.com's DNS server.
6. Finally, the example.com DNS server replies to Hannah, telling her that [www.fredsco.com](http://www.fredsco.com) resolves to IP address 199.1.1.2.

# DNS: How it works? (cont.)

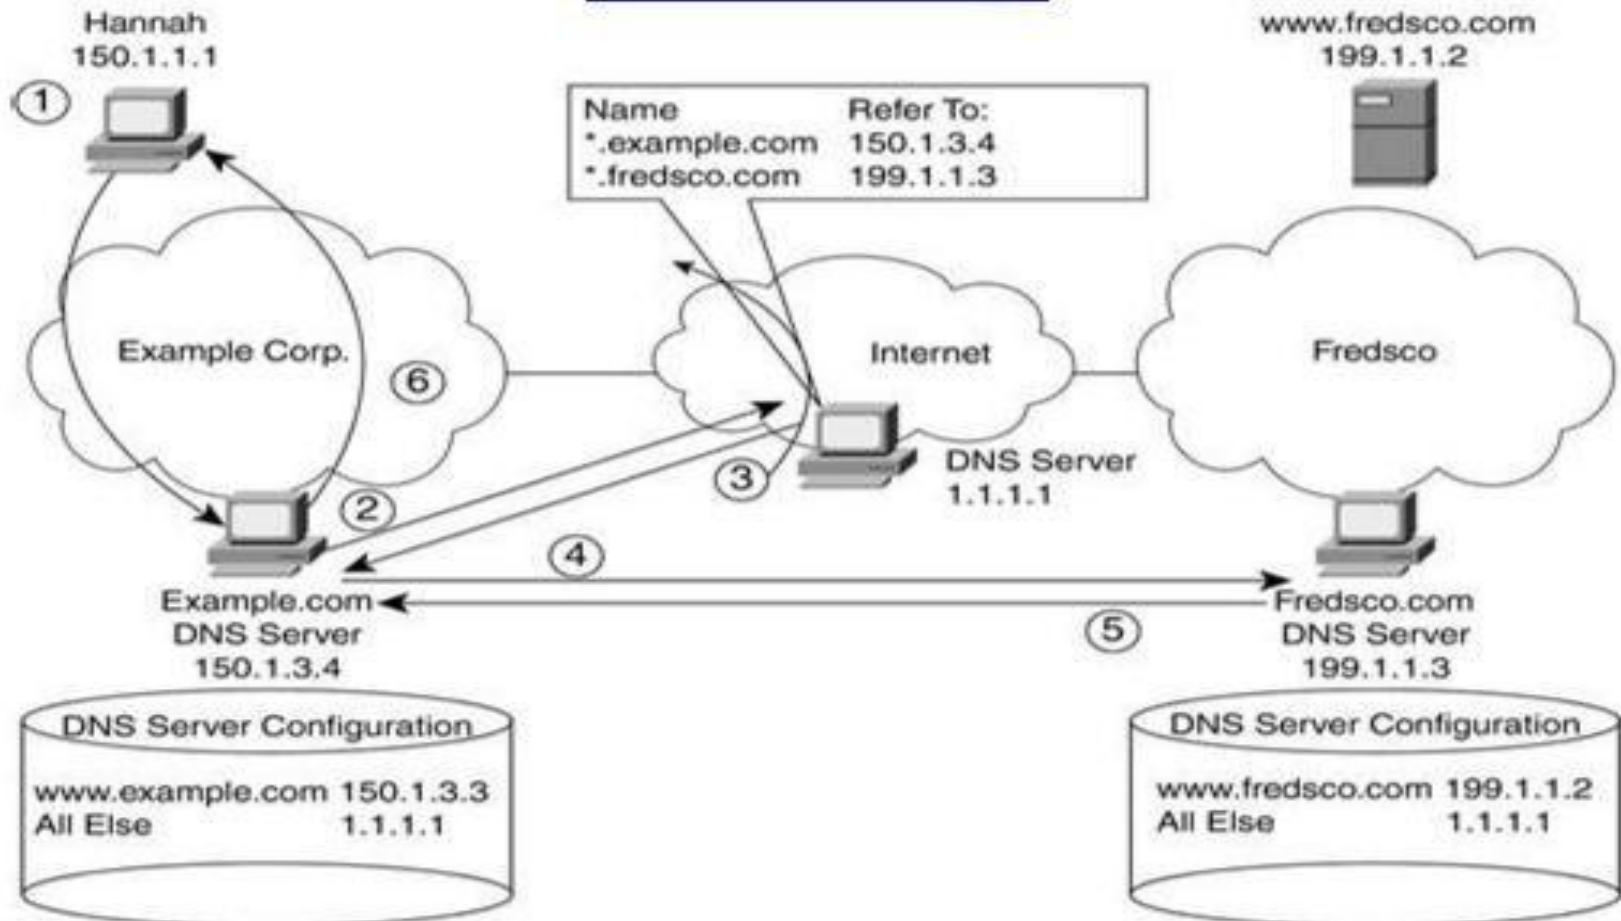





# Different types of DNS queries

DNS queries can be classified according to the manner in which a complete request is processed. Generally queries can be classified as follows.

- 1. Recursive query:** A recursive query is a kind of query, in which the DNS server, who received the sender's query will do all the job of fetching the answer, and giving it back to the sender.  
During this process, the DNS server might also query other DNS server's in the internet of the sender's behalf, for the answer.
- 2. Iterative query OR Nonrecursive query:** In an iterative query, the name server, will not go and fetch the complete answer for the sender's query, but will give back a referral to other DNS server's, which might have the answer.



# Recursive query/ Iterative query

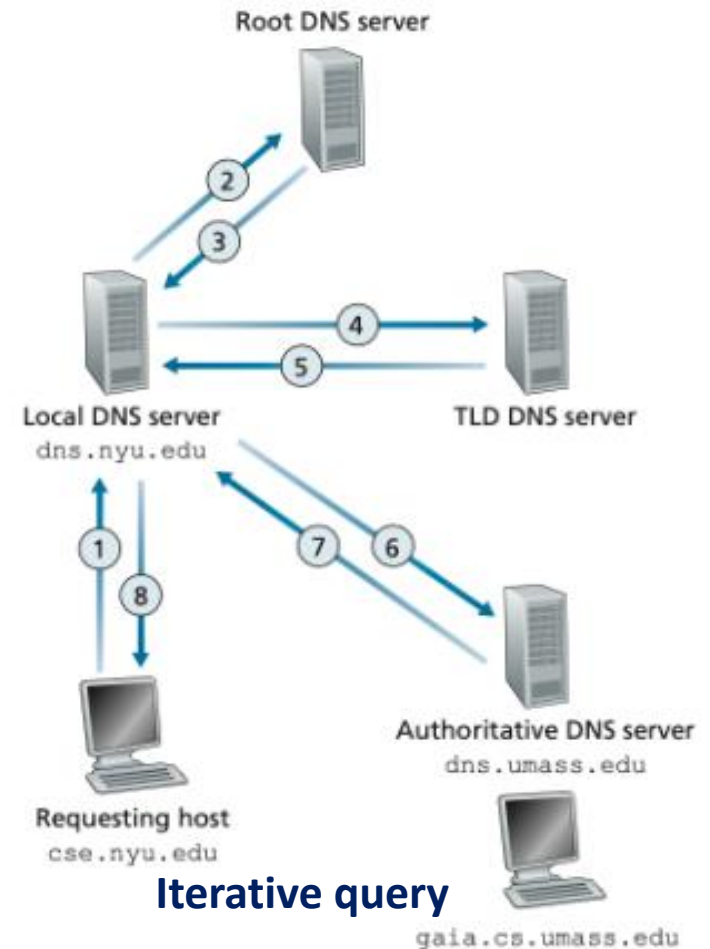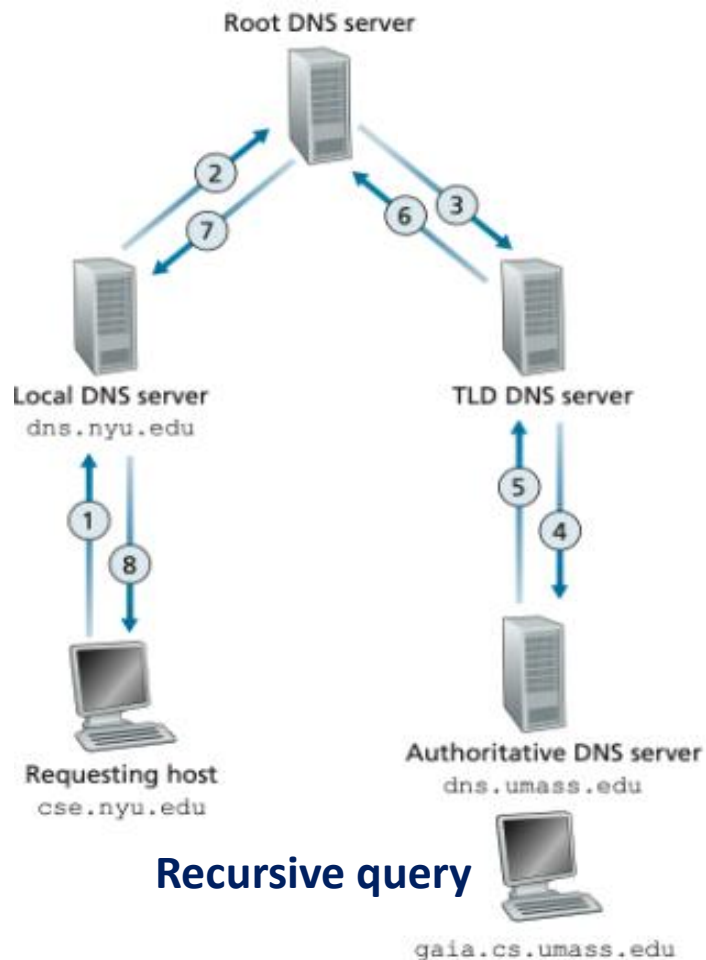



# References

1. **Data Communications and Networking**, *B. A. Forouzan*, McGraw-Hill, Inc., Fourth Edition, 2007, USA.
2. <https://www.geeksforgeeks.org/basics-computer-networking/>
3. [https://www.tutorialspoint.com/computer\\_fundamentals/computer\\_networking.htm](https://www.tutorialspoint.com/computer_fundamentals/computer_networking.htm)



# Books

1. **Data Communications and Networking**, *B. A. Forouzan*, McGraw-Hill, Inc., Fourth Edition, 2007, USA.
2. **Computer Networking: A Top-Down Approach**, *J. F., Kurose, K. W. Ross*, Pearson Education, Inc., Sixth Edition, USA.
3. **Official Cert Guide CCNA 200-301 , vol. 1**, *W. Odom*, Cisco Press, First Edition, 2019, USA.
4. **CCNA Routing and Switching**, *T. Lammle*, John Wiley & Sons, Second Edition, 2016, USA.
5. **TCP/IP Protocol Suite**, *B. A. Forouzan*, McGraw-Hill, Inc., Fourth Edition, 2009, USA.
6. **Data and Computer Communication**, *W. Stallings*, Pearson Education, Inc., 10<sup>th</sup> Edition, 2013, USA.