

Permissions & Policies

Cloud Infrastructure Engineering

**Nanyang Technological University
& Skills Union - 2022/2023**

Course Content

- Quick Check-In
- Dive into the basics of Permissions & Policies
- Explore the types of Permissions & Policies
- Explore creating Permissions & Policies on AWS

Time	What	How or Why
7:15pm - 7:45pm	Part 1 - Presentation	Overview of Permissions & Policies
7:45pm - 7:55pm	Break	
7:55pm - 8:15pm	Part 2 - Hands-on Activity	
8:15pm - 8:55pm	Part 3 - Group Activity	
8:55pm - 9:05pm	Break	
9:05pm - 10:00pm	Assignment & Wrap Up	

Self Study Check-In



Q1) Which of the following actions can be performed by an IAM user with the "ReadOnlyAccess" policy attached?

- a. Create an S3 bucket
- b. Modify an EC2 instance
- c. Create an IAM user
- d. View an S3 bucket's contents

Which of the following is a recommended best practice for securing IAM user credentials?

- a. Store access keys in plaintext on local machines
- b. Rotate access keys regularly
- c. Use the same access key and secret key for all IAM users
- d. Use long and complex passwords for access keys

Which of the following AWS services can be used to grant temporary access to AWS resources for IAM users?

- a. AWS Key Management Service (KMS)
- b. AWS IAM
- c. AWS Security Token Service (STS)

Q1) Explain Policies and Permissions in your own word?



Q2) What are Policies and Permissions
example in real world?



Q3) What are some examples of policy type?



Lesson Overview



Lesson Overview

IAM - Identity Access Management



AWS IAM

Lesson Overview



AWS Identity and Access Management

Apply fine-grained permissions to AWS services and resources



Who

Workforce users and workloads with IAM



Can access

Permissions with IAM policies



What

Resources within your AWS organization

Lesson Overview - Video



Lesson Overview

Users - Specific human individuals, can have personal logins


Groups - Collection of users e.g. HR, Developers, Security

Roles - Collection of Policies (DB Read, DB Write, S3 Admin)

Policies - Low-level permission to resources i.e. ALLOW or DENY

Lesson Overview

Groups - Collection of users e.g. HR, Developers, Security

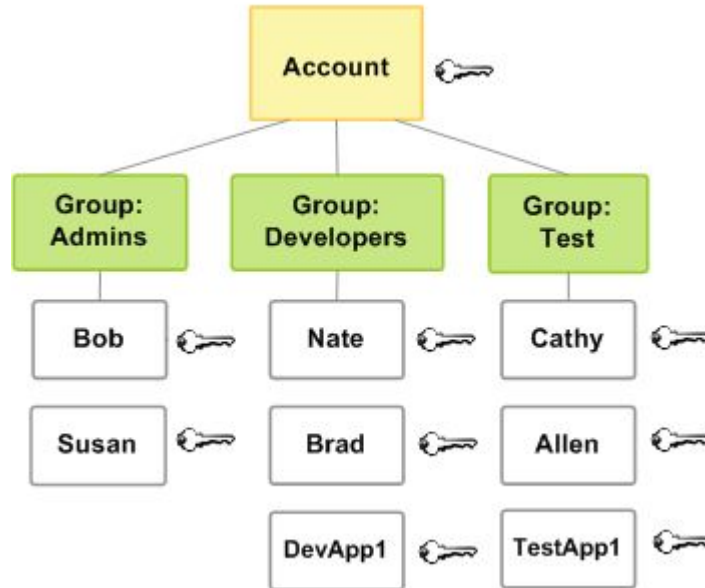

Lesson Overview

Policies - Low-level permission to resources i.e. ALLOW or DENY

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "add-read-only-perm",
      "Principal": "*",
      "Effect": "Allow",
      "Action": [
        "glacier:InitiateJob",
        "glacier:GetJobOutput"
      ],
      "Resource": [
        "arn:aws:glacier:us-west-2:999999999999:vaults/examplevault"
      ]
    }
  ]
}
```

Lesson Overview

By **creating policies and tying them to IAM identities** (users, groups of users, or roles) or AWS resources, you can **manage access in AWS**.

In AWS, a policy is an object that, when linked to an identity or resource, **defines the permissions for those objects**.

Why IAM?

- **Security** - Securely manage identities and access to AWS services and resources
- **Compliance** - Embedding IAM security strategies into your business operations helps you keep up with regulatory compliance
- **Confidentiality** - Only allowing the right users, groups or applications access to private data.

Policy Types



Summary

- Identity-Based Policies
- Resource-Based Policies
- Permissions Boundaries
- Organizations' SCPs
- Access Control Lists (ACLs)
- Session Policies

Identity-Based Policies

Attach **managed** or **inline policies** to IAM identities (users, groups to which users belong, or roles).

Identity-based policies grant permissions to an identity.

Resource-Based Policies

Attach **inline policies to resources**. The most common examples of resource-based policies are **Amazon S3 bucket policies** and **IAM role trust policies**.

Resource-based policies grant permissions to the principal that is specified in the policy. Principals can be in the same account as the resource or in other accounts.

Permissions Boundaries

Use a **managed policy** as the permissions boundary for an **IAM entity** (user or role).

That policy defines the **maximum permissions** that the **identity-based policies** **can grant to an entity**, but **does not grant permissions**.

Permissions boundaries do not define the maximum permissions that a resource-based policy can grant to an entity.

Organization SCP

Use an AWS Organizations Service Control Policy (SCP) to **define the maximum permissions for account members of an organization or organizational unit (OU)**.

SCPs **limit permissions that identity-based policies or resource-based policies grant to entities** (users or roles) within the account, but do not grant permissions.

Access Control Lists (ACLs)

Use ACLs to **control which principals in other accounts can access the resource** to which the ACL is attached.

ACLs are similar to resource-based policies, although they are the only policy type that does not use the JSON policy document structure.

ACLs are **cross-account permissions policies that grant permissions to the specified principal**. ACLs cannot grant permissions to entities within the same account.

Session Policies

Pass advanced session policies when you use the AWS CLI or AWS API to **assume a role or a federated user**.

Session policies **limit the permissions that the role or user's identity-based policies grant to the session**.

Session policies limit permissions for a created session, but do not grant permissions. For more information, see [Session Policies](#).

Summary

- Identity-Based Policies ***
- Resource-Based Policies ***
- Permissions Boundaries **
- Organizations' SCPs **
- Access Control Lists (ACLs) **
- Session Policies **

Example of Permission and Policies



Identity-Based Policies

Identity-based policies are **JSON permissions policy documents that control what actions an identity** (users, groups of users, and roles) **can perform**, on **which resources**, and **under what conditions**. Identity-based policies can be further categorized:

Managed policies – Standalone identity-based policies that you can attach to multiple users, groups, and roles in your AWS account. There are two types of managed policies:

- 1. AWS managed policies** – Managed policies that are created and managed by AWS.

Identity-Based Policies

Managed policies – Standalone identity-based policies that you can **attach to multiple users, groups, and roles** in your AWS account. There are two types of managed policies:

2. Customer managed policies – Managed policies that you create and manage in your AWS account. Customer managed policies provide more precise control over your policies than AWS managed policies.

Inline policies – Policies that you add directly to a single user, group, or role. Inline policies **maintain a strict one-to-one relationship** between a policy and an identity. They are deleted when you delete the identity.

Resource-Based Policies

Resource-based policies are **JSON policy documents** that you attach to a **resource such as an Amazon S3 bucket**.

These policies grant the specified principal permission to **perform specific actions on that resource** and **defines under what conditions this applies**.

Resource-based policies are **inline policies**. There are no managed resource-based policies.

Resource-Based Policies

To enable **cross-account access**, you can specify an **entire account or IAM entities in another account as the principal** in a resource-based policy.

Adding a cross-account principal to a resource-based policy is only half of establishing the trust relationship.

When the principal and the resource are in separate *AWS* accounts, you must also use an identity-based policy to grant the principal access to the resource.

However, if a resource-based policy grants access to a principal in the same account, no additional identity-based policy is required.

Resource-Based Policies

The IAM service supports only **one type of resource-based policy** called a **role trust policy**, which is attached to an IAM role.

An IAM role is both an identity and a resource that supports resource-based policies.

For that reason, you must **attach both a trust policy and an identity-based policy to an IAM role**.

Trust policies define which principal entities (accounts, users, roles, and federated users) can assume the role.

Comparing IBP & RBP

Account ID: 123456789012

Identity-based policies

John Smith

Can List, Read
On Resource X

Carlos Salazar

Can List, Read
On Resource Y,Z

Mary Major

Can List, Read, Write
On Resource X,Y,Z

Zhang Wei

No policy

Resource-based policies

Resource X

John Smith: Can List, Read
Mary Major: Can List, Read

Resource Y

Carlos Salazar: Can List, Write
Zhang Wei: Can List, Read

Resource Z

Carlos Salazar: Denied access
Zhang Wei: Allowed full access

IAM Permissions Boundaries

A permissions boundary is an **advanced feature** in which you set the **maximum permissions that an identity-based policy can grant to an IAM entity**.

When you set a permissions boundary for an entity, the entity can perform only the actions that are **allowed by both its identity-based policies and its permissions boundaries**.

Resource-based policies that specify the user or role as the principal are not limited by the permissions boundary. An explicit deny in any of these policies overrides the allow.

Access Control Lists

ACLs are **service policies** that **allow you to control which principals in another account can access a resource**.

ACLs cannot be used to control access for a principal within the same account.

ACLs are similar to resource-based policies, although they are the only policy type that **does not use the JSON policy document format**.

Amazon S3, AWS WAF, and Amazon VPC are examples of services that support ACLs.


Session Policies

Session policies are **advanced policies** that you pass as a parameter when you programmatically create a **temporary session for a role or federated user**.

The permissions for a session are the **intersection of the identity-based policies for the IAM entity (user or role) used to create the session and the session policies**. Permissions can also come from a resource-based policy.

An explicit deny in any of these policies overrides the allow.

Session Policies

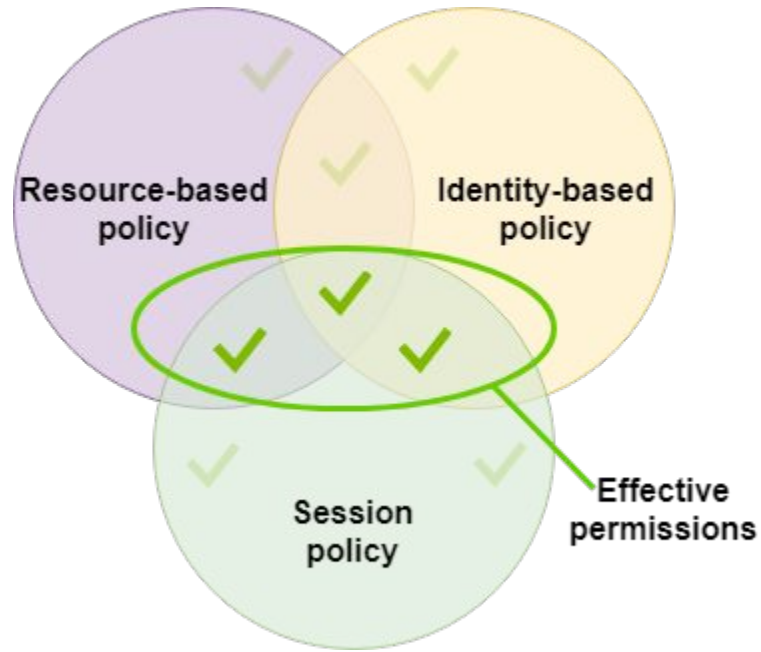

Session Policies

You can create role session and pass session policies programmatically using the AssumeRole, AssumeRoleWithSAML, or AssumeRoleWithWebIdentity API operations.

You can pass a single JSON inline session policy document using the Policy parameter. You can use the PolicyArns parameter to specify up to 10 managed session policies.

Session Policies

A resource-based policy can specify the ARN of the user or role as a principal.

In that case, the permissions from the resource-based policy are added to the role or user's identity-based policy before the session is created.

The session policy limits the total permissions granted by the resource-based policy and the identity-based policy.

The resulting session's permissions are the intersection of the session policies and the resource-based policies plus the intersection of the session policies and identity-based policies.

Group Activity

You or your group have discussed a specific case or business. Now let's list down all the users in your business, before we determine the policy they will get.

Example:

HR

Procurement Team

C-Level

Marketing Team

Group Activity

You or your group have discussed a specific case or business. Now let's list down all the users in your business, before we determine the policy they will get.

Example:

User/ Apps/ Role	Policy
HR	...
Developers	...

More On IAM




Examples of Permission & Policies

- Allows access during a specific range of dates.
- Allows enabling and disabling AWS Regions.
- Allows MFA-authenticated users to manage their own credentials on the My Security Credentials page.
- Allows specific access when using MFA during a specific range of dates.
- Allows users to manage their own credentials on the My Security Credentials page.

Examples of Permission & Policies

- Allows users to manage their own MFA device on the My Security Credentials page.
- Allows users to manage their own password on the My Security Credentials page.
- Allows users to manage their own password, access keys, and SSH public keys on the My Security Credentials page.
- Denies access to AWS based on the requested Region.
- Denies access to AWS based on the source IP address.

Tying It Up

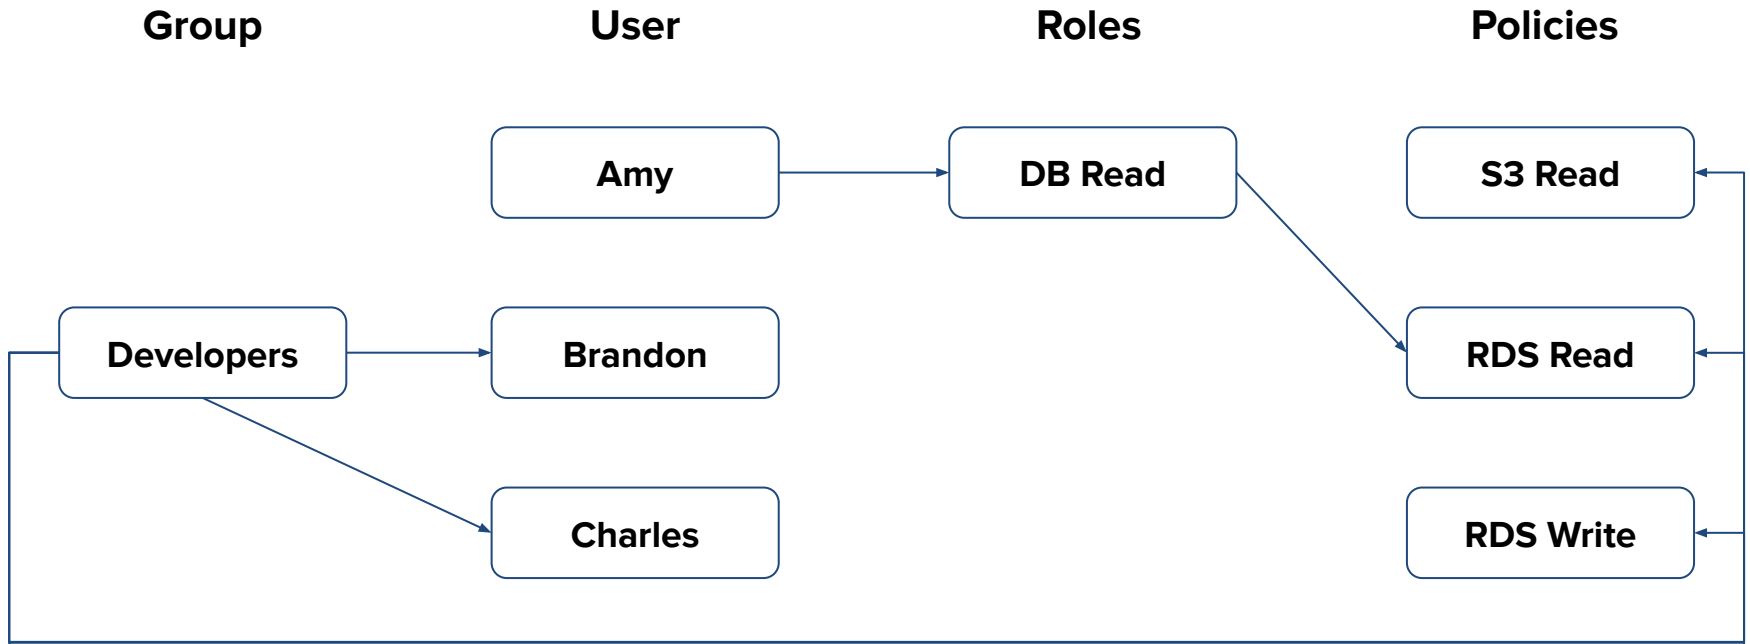

Best Practices

Rotate access keys regularly for use cases that require long-term credentials

Require **Multi-Factor Authentication**

Grant **Least Privilege**

<https://aws.amazon.com/iam/resources/best-practices/?nc=sn&loc=4&dn=1>

Activity

Learner:

- Clean up AWS.
- Remove/delete/terminate all service/ resources that created.

Instructor

- Clean up AWS.
- Remove/delete/terminate all service/ resources that created.
- Check the AWS account after learner clean up.

What's Next?

