

What C++ architecture could best support Quality-of-Experience-oriented map streaming in a multiplayer building game?

COMP130 - Computing Architecture

1707981

March 23, 2018

Low broadband speeds across the world could hinder the advancement of multiplayer gaming, particularly for traffic-hungry projects such as MMOs or building games. From a creative standpoint, player experience is decidedly the most important factor in a game's design. When downloading the game environment, low bandwidth increases download speeds and temporarily strips players of their autonomy, causing frustration. To aid this, Quality-of-Experience (QoE) techniques are proposed to mitigate the negative effects of limited bandwidth on the player experience, in a way that could be adapted to existing games with minimal difficulty.

1 Introduction

The games market is continuing to grow at an immense rate, especially in developing countries. In East Asia, a growth of nearly 15% over the last year has been observed, as shown in Fig. 1.

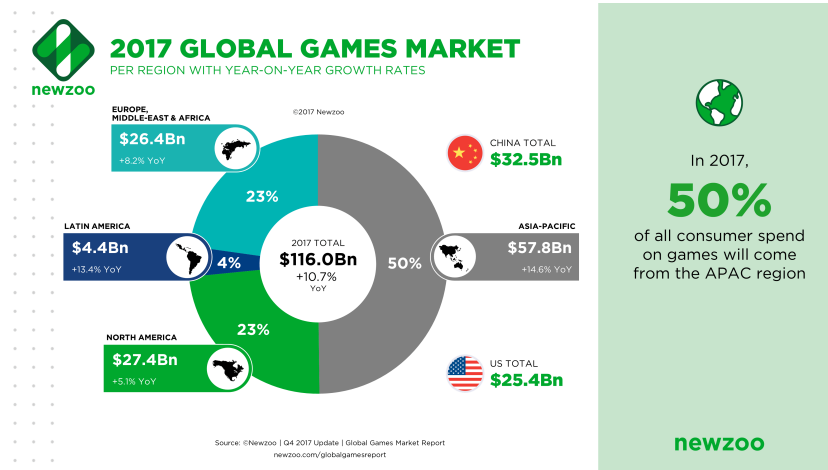


Figure 1: The games market in 2017, according to NewZoo (Source: [1])

This presents profitable opportunities for game developers to expand into new territories. However, a lag in technological advancement, particularly broadband, raises reasonable concerns of whether they can fully exploit these opportunities. The potential of games where players can build the map, such as the extremely popular (as suggested by Google Trends [2]) Minecraft and Fortnite, may be hindered by a lack of bandwidth necessary to download player-built resources at an acceptable speed. A slow download of map resources may frustrate players by rendering them unable to access areas of the game in a timely manner.

This study aims to discover the extent of this problem, followed by proposals of architectural methods to implement systems that could mitigate the negative effects of an unreliable networking environment on the player experience. These can be described as QoE (Quality-of-Experience) improvements where the bandwidth is not improved, but instead coordinated where the player needs it most. The programming language in question is C++, while the hypothetical game assumed a 3D environment wherein the player can manipulate the terrain and build meshes. The goal is to propose a reasonable set of design patterns to be used for QoE-oriented map streaming in a large-scale game, and how they could be applied to an existing game engine.

This analysis will take place over the following steps:

- Exploration into the games market and its broadband speeds
- A brief introduction to player experience as a separate concept to content quality
- Existing strategies used by games for map streaming
- A proposed technical outline of a system that could facilitate level streaming with priority on player experience

2 The Big, Slow Market

China is the most profitable games market as of 2017 [3]. Furthermore, according to SteamSpy in March 2018, 8 of the 10 most popular Steam games in China were partly or fully multiplayer [4]. This suggests China is a valuable target for online games. However, compared to most developed countries, China’s Internet speeds lag behind (figuratively speaking), at an average of 7.6Mbps [5].

Similarly, another country notorious for its online gaming community is Brazil. According to SteamSpy, 9 of the top 10 games had a multiplayer component, with 8 boasting primarily multiplayer gameplay [6]. Brazil’s Internet speed averaged about the same—6.8Mbps—in 2017 [5] (an ironic failing for the world’s fifth top source of DDoS attacks in early 2017 [7]).

Speeds in the UK and US meanwhile average at over twice as much, 16.9Mbps and 18.7Mbps respectively. While this study was originally expecting a bigger discrepancy, it could surmise that the map streaming engines of large-scale player-built online games will require optimisation to compensate the lack of data bandwidth compared to, for example, disk speeds. In the Sony PS4’s case, streaming speed from the disc maxes out at 27MB/s (at a 1x speed of 36Mbps [8] multiplied by 6 [9])—a significantly higher rate than Brazil’s average Internet speed of 6.8Mbps, or 0.85 MB/s. This is only 3% of the typical disc data rate.

There is a lack of definitive research on the impact of low broadband speed in map streaming. Instead, many studies such as [CITE] are focused on reducing and optimising traffic. This is helpful to developers, but lacks a point of reference or scale in terms of user experience, making the actual negative impacts of low bandwidth relatively uncertain. Until this is further understood, it could be beneficial to design a system around scalable broadband speed, such that it can guarantee an acceptably ‘fun’ quality even in extremely slow network conditions. However, the definition of ‘fun’ may be at odds with the industry’s tendency to create games that are bigger, more detailed, and overall more data-heavy as they evolve [10]. This prompts an exploration into what is ‘fun’, in a term more aptly described as quality of experience.

3 Quality of player experience

Video streaming is a heavily researched area; perhaps more than games, owing to significant dedicated R&D toward streaming services such as the Amazon FireTV [11]. Yet considering the link between video quality and quality of gameplay aesthetic—including pixel resolution, lag spike rate, and frame rate—the basic principles and goals could perhaps apply to games as well.

In the context of video, it has been documented [12] that user enjoyment is greater in a scenario of low-detail, constant frame streaming, than one of higher-detail, inconsistent frame streaming. In other words, the user is not interested in the rate of high-detailed data, but in enjoying a smoother experience.

In the context of games, this smooth experience is also shown to be necessary to retain

game players. Studies have noted latency [13] [14], jitter and packet loss [14] to all have negative impacts, sometimes leading to quitting altogether. While this is not widely studied in building games—but FPSes and MMOs—games such as the recent and highly popular [15] Fortnite, which features both building elements and shooting gameplay, demonstrates that the two are not necessarily mutually exclusive.

Another study [10] noted the importance of animations in a game. Similarly, this centres around the concept of motion, and as above, suggests that graphical detail is of smaller importance than the player’s ability to gain immediate feedback. This is supported at a base psychological level by R. Ryan and E. Deci’s reputable research on human motivation [16] (especially reputable in that they have disproportionately few people to cite, other than themselves, throughout their entire paper), which notes a human desire to explore, apply their skills, and learn from the feedback.

These findings place high importance on the motion, control, and abilities of the player rather than visual fidelity of the background. In map streaming, this translates to the importance of giving the player base landscape to move within and toward. This places the level mesh, and perhaps interactive objects (noting the need for motion), above textures and sounds in the priority list.

4 Quality of experience – Priorities

To maximise player experience, a preliminary priority list is thus proposed:

- Player movement
- Player avatar
- Textureless nearby level geometry
- Interactive objects
- Player animations
- Object animations
- Textures
- Miscellaneous

However, this is not an exact science. For example, level textures may come in a low-quality form before their final form. This would show evidence of loading progress to the player. While it could be argued as invasive, a player would likely deem this more favourable than—for example—a loading screen, as observed in software studies [17]. Furthermore, level textures might not necessarily be streamed, unless the players should be able to draw their own.

While they are described above, the specifics of animation, player model, object and texture streaming are beyond the scope of this essay. They could, however, very likely be adapted in a similar fashion.

5 Existing strategies

Locality-based streaming prioritisation already exists, and is used in open-world games to save memory and loading times. Engines such as the Unreal Engine provide World Composition, allowing the world to be partly loaded in small sections as the player approaches them [18]. This is characterised by the loading of low-LOD (Level-of-Detail) versions of level components distant to the camera, and the high-LOD versions of close ones, all in a background process. This hides level details in the distance at the benefit of reducing the memory footprint, hiding loading times, and increasing the frame rate. The latter two in particular improves the player’s perception of the game motion, and provides data to the player in a spatially-aware manner such that the player has immediate access to the areas closest to them.

However, systems such as the above assume a higher data rate, and is typically sourced from a disk or hard disk.

6 Proposal

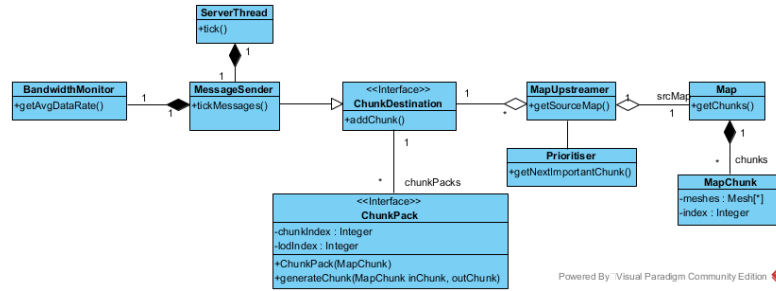


Figure 2: Partial class diagram illustrating the potential map streaming server

The proposed system would comprise the following key classes:

Map: Base map class. This is shared between the client and server. By partitioning the map into several 'chunks', separate pieces of it can be downloaded at a time, allowing the player to roam incomplete areas in short notice. **ChunkDestination**: A collection of **ChunkPacks** that may be implemented in multiple ways. In this case, it is connected to **MessageSender** for immediate transmission. In more advanced cases, it could also, at a later stage, be implemented on the client machine as a map storage manager, which could cache map data on a local machine for later use. **MapUpstreamer**: The MapUpstreamer is effectively a *Mediator* (described as a class that manages the collaboration between objects [19]) technically owned by neither Map nor ChunkDestination. This method was chosen so that MapUpstreamer could, if necessary, operate independently in parallel to the other tasks. An observer pattern could reasonably be used, but this typically means synchronising the data on an immediate basis [19], something which is not necessary for the time-sensitive task of prioritising the data flow. **BandwidthMonitor**:

7 Proposal

Due to an extreme lack of time and an extremely tired caffeine-free (and vitamin-deficient) author, a tacked-together solution is hastily proposed by this essay draft.

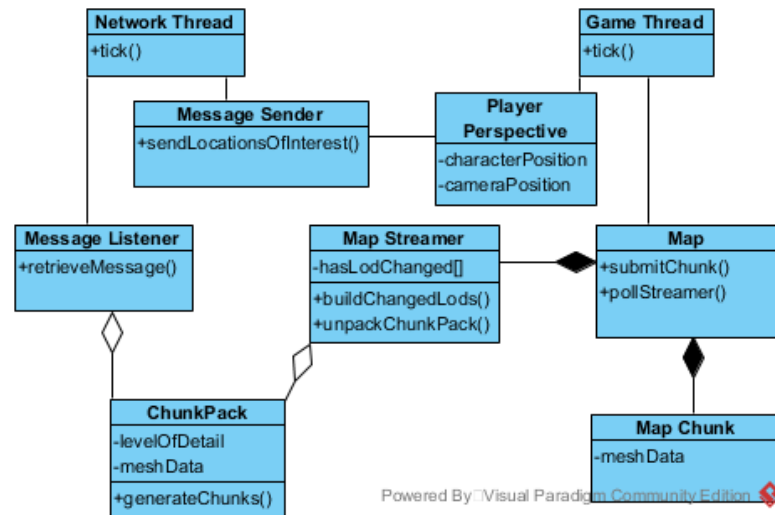


Figure 4: A class diagram demonstrating a map streaming component connected to a basic Map class.

The class diagram above depicts the client end of the map streaming game component. As some partly-downloaded data is not needed by the game component until it's complete, the process is divided into two concurrent, non-conflicting threads. Flow takes place in the following fashion:

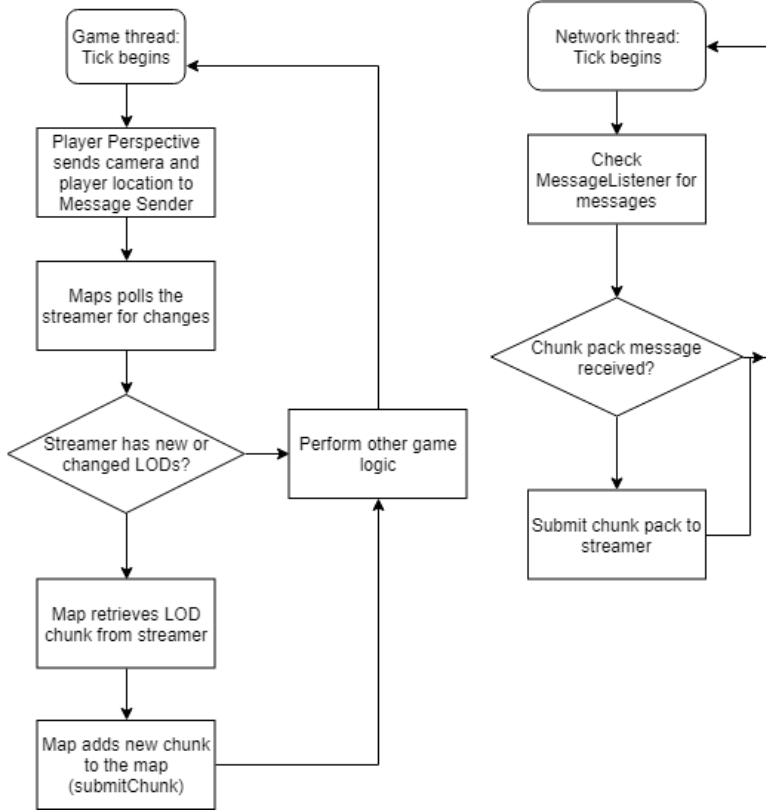


Figure 5: Process flow of the two threads in parallel

In this example, the client begins by sending the player and camera location as soon as possible. Sometimes these two variables may be different: it is important that both areas are prepared for the player’s viewing. The server is assumed to prioritise the level chunk geometry from closest to furthest.

A **level chunk** is defined as a region of space where static level geometry resides. The shape of a level chunk varies across games, though in a building game, a uniform shape could be chosen such that there are no notable inefficiencies to building in one place over another. Existing games use various strategies. For example, *Sunset Overdrive* (Insomniac Games, 2014) used hexagonal chunks by design and radial chunks in practice. This was optimised for the player’s freedom of movement. However, an earlier game by the same company, *Fuse* (Insomniac Games, 2013), used rectangular chunks. This was optimised for linear hall-based gameplay. (CITE ALL THIS).

The **level streamer** is responsible for collecting **Chunk Packs** (partial, LOD-specific level chunk data downloaded from the server) and transferring them to the physical **Map** when it deems appropriate. In the above example, it does so as soon as it is immediately downloaded. However, it may benefit the player experience to record the amount of processing time spent during recent frames, and responding by slowing the conversion process or postponing it. This could help preserve a high frame rate and provide a

smoother experience.

8 Total Conclusion

There are further systems to be explored, citations to be added and slightly passive-aggressive expressions of frustration to be passive-aggressively expressed at the recent surge in workload that are beyond the scope of this essay draft, and the author's physical capabilities at 3am, let alone intellectual ones. The author as such has little idea what they are doing and submits this draft to the peer review with great hesitation and a tear in his eye.

References

- [1] "Key resources." <https://newzoo.com/resources/>, Oct. 2017. Accessed: 16/03/2018.
- [2] T. Kim. <https://www.cnn.com/2018/03/15/fortnite-is-becoming-biggest-game-on-internet.html>, Mar. 2018. Accessed: 16/03/2018.
- [3] C. Cui and P. Harding-Rolls, "China - largest games market continues its growth story." <https://technology.ihc.com/593405/china-largest-games-market-continues-its-growth-story>, June 2017. Accessed: 13/03/2018.
- [4] "China - Country Stats - SteamSpy." <http://steamspy.com/country/CN>, Mar. 2018. Accessed: 18/03/2018.
- [5] "Q1 2017 State of the Internet Connectivity Report." <https://www.akamai.com/us/en/multimedia/documents/state-of-the-internet/q1-2017-state-of-the-internet-connectivity-report.pdf>, May 2017. Accessed: 20/03/2018.
- [6] "Brazil - Country Stats - SteamSpy." <http://steamspy.com/country/BR>, Mar. 2018. Accessed: 20/03/2018.
- [7] "Q4 2017 State of the Internet Security Report." <https://www.akamai.com/us/en/multimedia/documents/state-of-the-internet/q4-2017-state-of-the-internet-security-report.pdf>, Feb. 2018. Accessed: 19/03/2018.
- [8] "Blu-ray FAQ." <http://www.blu-ray.com/faq/>. Accessed: 22/03/2018.
- [9] "Tech specs (PS4)." <https://www.playstation.com/en-gb/explore/ps4/tech-specs/>. Accessed: 22/03/2018.

- [10] E. Andersen, Y.-E. Liu, R. Snider, R. Szeto, and Z. Popović, “Placing a value on aesthetics in online casual games,” in *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, CHI ’11, (New York, NY, USA), pp. 1275–1278, ACM, 2011.
- [11]
- [12] D. C. Robinson, Y. Jutras, and V. Craciun, “Subjective video quality assessment of http adaptive streaming technologies,” *Bell Labs Technical Journal*, vol. 16, pp. 5–23, Mar. 2012.
- [13] S. Zander and G. Armitage, “Empirically measuring the qos sensitivity of interactive online game players,” in *Australian Telecommunications Networks & Applications Conference*, pp. 8–10, Dec. 2004.
- [14] K. T. Chen, P. Huang, and C. L. Lei, “Effect of network quality on player departure behavior in online games,” *IEEE Transactions on Parallel and Distributed Systems*, vol. 20, pp. 593–606, May 2009.
- [15] “Most Played Core PC Games (US & Europe).” <https://web.archive.org/web/20180323094757/https://newzoo.com/insights/rankings/top-20-core-pc-games/>, Mar. 2018. Accessed: 23/03/2018.
- [16] R. M. Ryan and E. L. Deci, “Intrinsic and extrinsic motivations: Classic definitions and new directions,” *Contemporary Educational Psychology*, vol. 25, no. 1, pp. 54 – 67, 2000.
- [17] J. Hohenstein, H. Khan, K. Canfield, S. Tung, and R. Perez Cano, “Shorter wait times: The effects of various loading screens on perceived performance,” in *Proceedings of the 2016 CHI Conference Extended Abstracts on Human Factors in Computing Systems*, CHI EA ’16, (New York, NY, USA), pp. 3084–3090, ACM, 2016.
- [18] “Unreal documentation: World Composition.” <https://docs.unrealengine.com/en-US/Engine/LevelStreaming/WorldBrowser>, Mar. 2018. Accessed: 20/03/2018.
- [19] E. Gamma, R. Helm, R. E. Johnson, and J. M. Vlissides, “Design patterns: Abstraction and reuse of object-oriented design,” in *Proceedings of the 7th European Conference on Object-Oriented Programming*, ECOOP ’93, (London, UK, UK), pp. 406–431, Springer-Verlag, 1993.