


Node-time encoder-decoder for heterogeneous SIPS

Node features encode reusable heterogeneity; the time branch represents temporal variation without one output head per node.

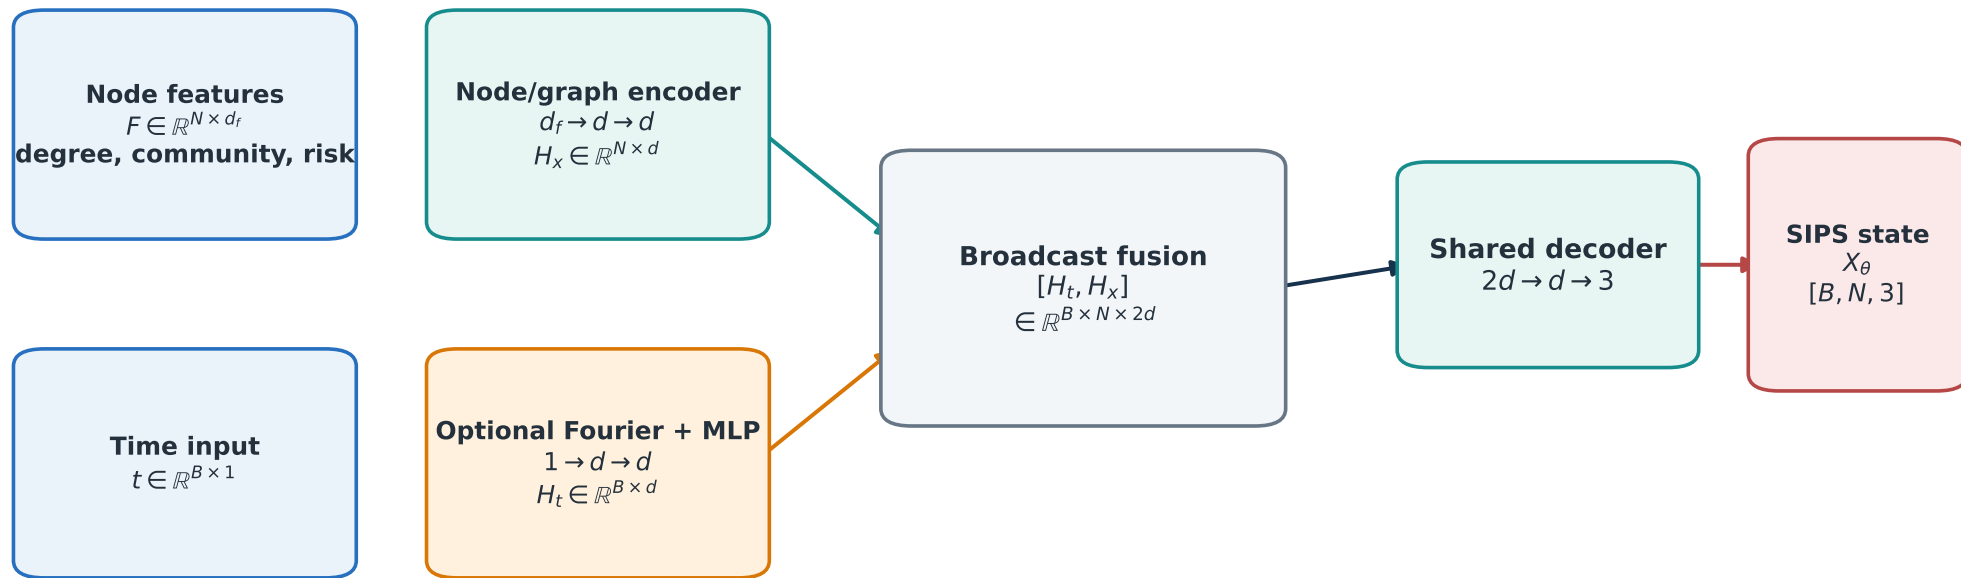

A separate positive rate head uses softplus; a gauge fixes the susceptibility-infectivity scale ambiguity.