


Node-time encoder-decoder for heterogeneous SIPS

Node features encode reusable heterogeneity; the time branch represents temporal variation without one output head per node.

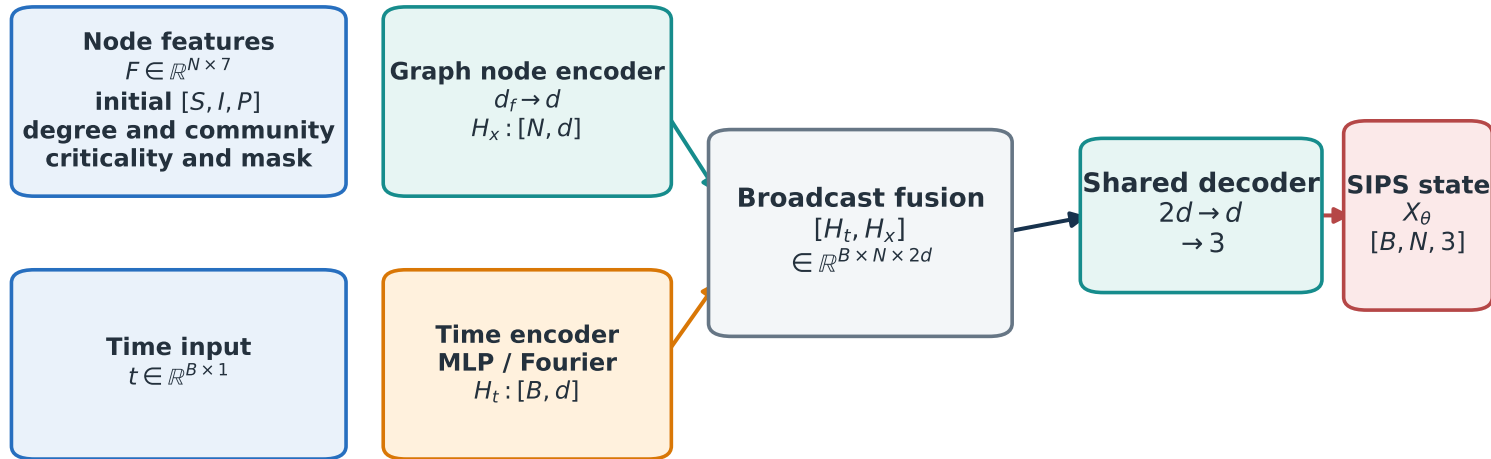

A separate positive-rate head uses softplus.
A gauge fixes the susceptibility-infectivity scale ambiguity.