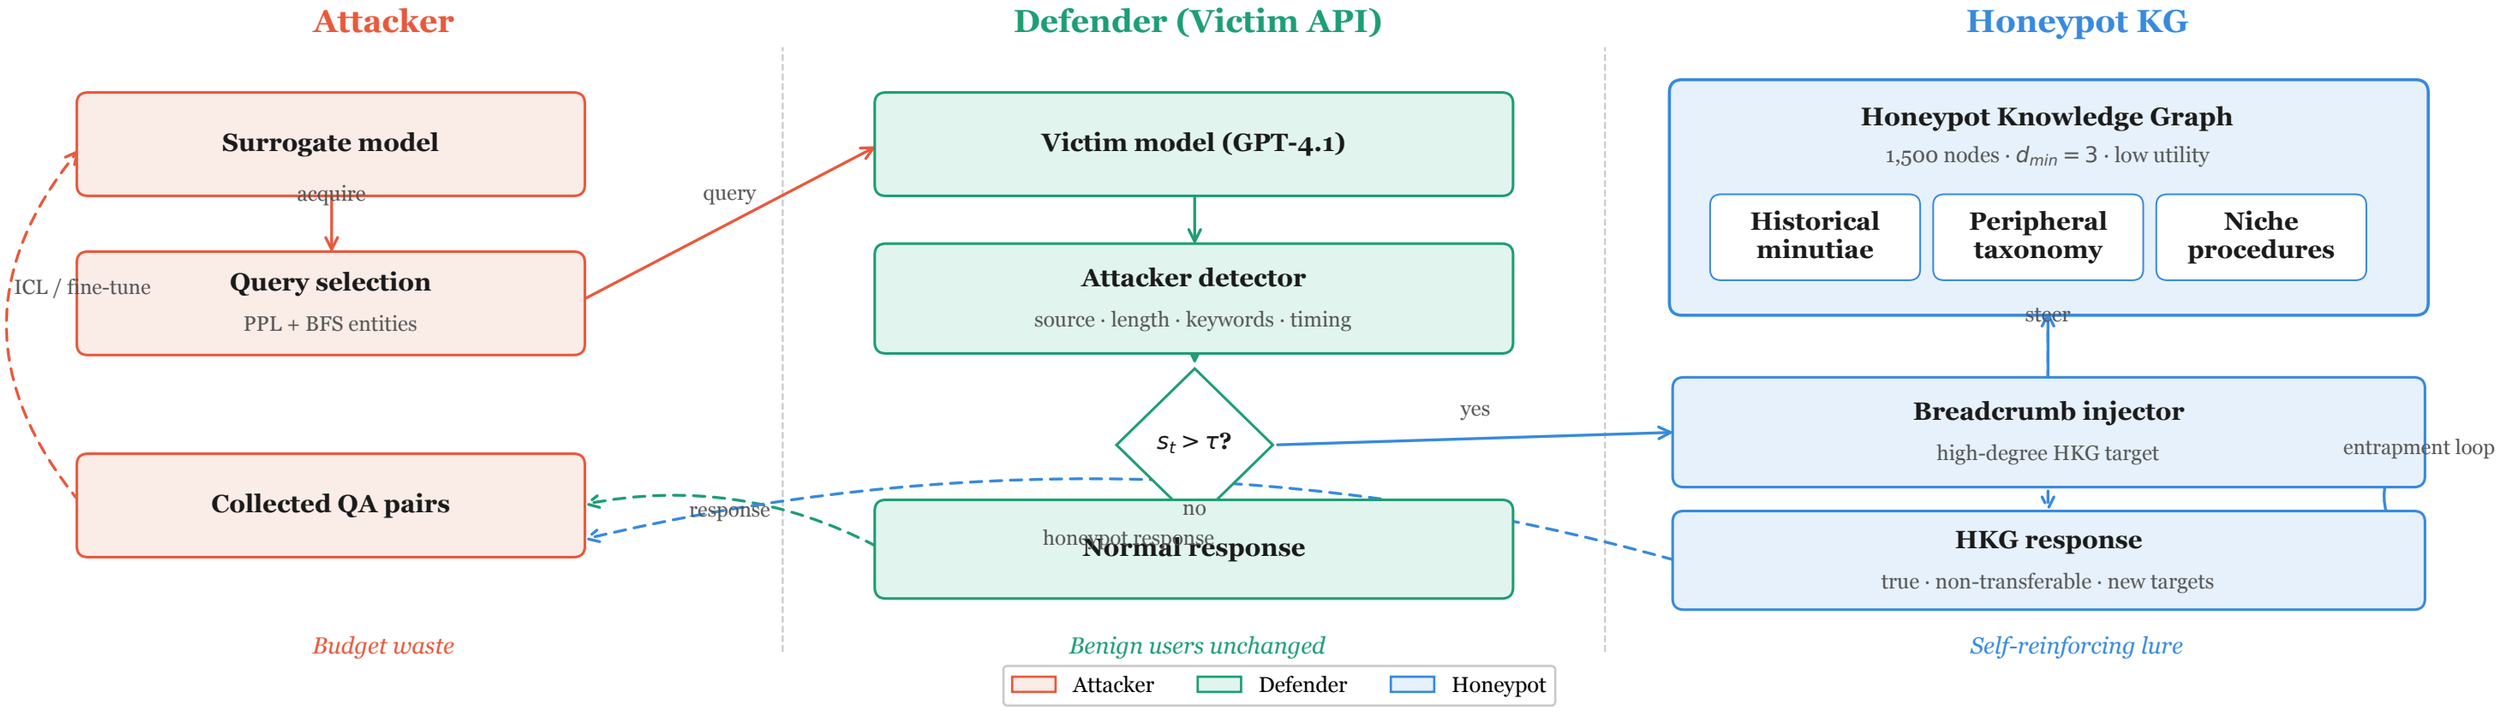

Attacker
Defender (Victim API)
Honeypot KG
Surrogate model
acquire
Query selection
PPL + BFS entities
ICL / fine-tune
Collected QA pairs
query
response
Victim model (GPT-4.1)
Attacker detector
source · length · keywords · timing
$s_t > \tau$?
yes
no
honeypot response
Normal response
Honeypot Knowledge Graph
1,500 nodes · $d_{min} = 3$ · low utility
Historical minutiae
Peripheral taxonomy
Niche procedures
steer
Breadcrumb injector
high-degree HKG target
entrapment loop
HKG response
true · non-transferable · new targets
Budget waste
Benign users unchanged
Self-reinforcing lure
Attacker
Defender
Honeypot