

REQUIREMENT ANALYSIS & SPECIFICATION

The software requirements are description of features and functionalities of the target system. Requirements convey the expectations of users from the software product. The requirements can be obvious or hidden, known or unknown, expected or unexpected from client's point of view.

Requirement Engineering

The process to gather the software requirements from client, analyze and document them is known as ***requirement engineering***.

The goal of requirement engineering is to develop and maintain sophisticated and descriptive 'System Requirements Specification' document.

Requirement Engineering Process

It is a four step process, which includes –

- Feasibility Study
- Requirement Gathering
- Software Requirement Specification
- Software Requirement Validation

Let us see the process briefly -

Feasibility study

When the client approaches the organization for getting the desired product developed, it comes up with rough idea about what all functions the software must perform and which all features are expected from the software.

Referencing to this information, the analysts does a detailed study about whether the desired system and its functionality are feasible to develop.

This feasibility study is focused towards goal of the organization. This study analyzes whether the software product can be practically materialized in terms of implementation, contribution of project to organization, cost constraints and as per values and objectives of the organization. It

explores technical aspects of the project and product such as usability, maintainability, productivity and integration ability.

The output of this phase should be a feasibility study report that should contain adequate comments and recommendations for the management about whether or not the project should be undertaken.

Requirement Gathering

If the feasibility report is positive towards undertaking the project, next phase starts with gathering requirements from the user. Analysts and engineers communicate with the client and end-users to know their ideas on what the software should provide and which features they want the software to include.

Software Requirement Specification

SRS is a document created by the system analyst after the requirements are collected from various stakeholders.

SRS defines how the intended software will interact with hardware, external interfaces, speed of operation, response time of system, portability of software across various platforms, maintainability, speed of recovery after crashing, Security, Quality, Limitations etc.

The requirements received from client are written in natural language. It is the responsibility of system analyst to document the requirements in technical language so that they can be comprehended and useful by the software development team.

SRS should come up with following features:

- User requirements are expressed in natural language.
- Technical requirements are expressed in structured language, which is used inside the organization.
- Design description should be written in pseudo code.
- Format of Forms and GUI screen prints.
- Conditional and mathematical notations for DFDs etc.

Software Requirement Validation

After requirement specifications are developed, the requirements mentioned in this document are validated. User might ask for illegal, impractical solution or experts may interpret the requirements incorrectly. This results in huge increase in cost if not nipped in the bud.

Requirements can be checked against following conditions -

- If they can be practically implemented
- If they are valid and as per functionality and domain of software
- If there are any ambiguities
- If they are complete
- If they can be demonstrated

Requirement Elicitation Process

Requirement elicitation process can be depicted using the following diagram:



Fig 1: Requirement elicitation process

- **Requirements gathering** - The developers discuss with the client and the end users and know their expectations from the software.
- **Organizing Requirements** - The developers prioritize and arrange the requirements in order of importance, urgency and convenience.
- **Negotiation & discussion** - If the requirements are ambiguous or there are some conflicts in the requirements of various stakeholders, it is then negotiated and discussed with the stakeholders. Requirements may then be prioritized and reasonably compromised.

The requirements come from various stakeholders. To remove the ambiguity and conflicts, they are discussed for clarity and correctness. Unrealistic requirements are compromised reasonably.

- **Documentation** - All formal & informal, functional and non-functional requirements are documented and made available for next phase processing.

Requirement Elicitation Techniques

Requirements Elicitation is the process to find out the requirements for an intended software system by communicating with client, end users, system users and others who have a stake in the software system development.

There are various ways to discover requirements

Interviews

Interviews are strong medium to collect requirements. Organization may conduct several types of interviews such as:

- Structured (closed) interviews, where every single information to be gathered, is decided in advance, they follow the pattern and matter of discussion firmly.
- Non-structured (open) interviews, where information to gather is not decided in advance, more flexible and less biased.
- Oral interviews
- Written interviews
- One-to-one interviews which are held between two persons across the table.
- Group interviews which are held between groups of participants. They help to uncover any missing requirement as numerous people are involved.

Surveys

Organization may conduct surveys among various stakeholders by querying about their expectation and requirements from the upcoming system.

Questionnaires

A document with pre-defined set of objective questions and respective options is handed over to all stakeholders to answer, which are collected and compiled.

A shortcoming of this technique is, if an option for some issue is not mentioned in the questionnaire, the issue might be left unattended.

Task analysis

Team of engineers and developers may analyze the operation for which the new system is required. If the client already has some software to perform certain operation, it is studied and requirements of proposed system are collected.

Domain Analysis

Every software falls into some domain category. The expert people in the domain can be a great help to analyze general and specific requirements.

Brainstorming

An informal debate is held among various stakeholders and all their inputs are recorded for further requirements analysis.

Prototyping

Prototyping is building user interface without adding detail functionality for user to interpret the features of intended software product. It helps giving better idea of requirements. If there is no software installed at client's end for developer's reference and the client is not aware of its own requirements, the developer creates a prototype based on initially mentioned requirements. The prototype is shown to the client and the feedback is noted. The client feedback serves as an input for requirement gathering.

Observation

Team of experts visits the client's organization or workplace. They observe the actual working of the existing installed systems. They observe the workflow at client's end and how execution problems are dealt. The team itself draws some conclusions which aid to form requirements expected from the software.

LECTURE NOTE-5

SOFTWARE REQUIREMENT CHARACTERISTICS

Gathering software requirements is the foundation of the entire software development project. Hence they must be clear, correct and well-defined.

A complete Software Requirement Specifications must be:

- Clear
- Correct
- Consistent
- Coherent
- Comprehensible
- Modifiable
- Verifiable
- Prioritized
- Unambiguous
- Traceable
- Credible source

Software Requirements

We should try to understand what sort of requirements may arise in the requirement elicitation phase and what kinds of requirements are expected from the software system.

Broadly software requirements should be categorized in two categories:

Functional Requirements: Requirements, which are related to functional aspect of software fall into this category. They define functions and functionality within and from the software system.

EXAMPLES -

- Search option given to user to search from various invoices.
- User should be able to mail any report to management.
- Users can be divided into groups and groups can be given separate rights.
- Should comply business rules and administrative functions.
- Software is developed keeping downward compatibility intact.

Non-Functional Requirements: Requirements, which are not related to functional aspect of software, fall into this category. They are implicit or expected characteristics of software, which users make assumption of.

Non-functional requirements include -

- Security
- Logging
- Storage
- Configuration
- Performance
- Cost
- Interoperability
- Flexibility
- Disaster recovery
- Accessibility

Requirements are categorized logically as

- **Must Have:** Software cannot be said operational without them.
- **Should have:** Enhancing the functionality of software.
- **Could have:** Software can still properly function with these requirements.
- **Wish list:** These requirements do not map to any objectives of software.

While developing software, 'Must have' must be implemented, 'Should have' is a matter of debate with stakeholders and negotiation, whereas 'could have' and 'wish list' can be kept for software updates.

User Interface (UI) requirements

UI is an important part of any software or hardware or hybrid system. A software is widely accepted if it is -

- easy to operate
- quick in response
- effectively handling operational errors
- providing simple yet consistent user interface

User acceptance majorly depends upon how user can use the software. UI is the only way for users to perceive the system. A well performing software system must also be equipped with attractive, clear, consistent and responsive user interface. Otherwise the functionalities of software system cannot be used in convenient way. A system is said be good if it provides means to use it efficiently. User interface requirements are briefly mentioned below -

- Content presentation
- Easy Navigation
- Simple interface
- Responsive
- Consistent UI elements
- Feedback mechanism
- Default settings
- Purposeful layout
- Strategically use of color and texture.
- Provide help information
- User centric approach
- Group based view settings.

Software System Analyst

System analyst in an IT organization is a person, who analyzes the requirement of proposed system and ensures that requirements are conceived and documented properly & correctly. Role of an analyst starts during Software Analysis Phase of SDLC. It is the responsibility of analyst to make sure that the developed software meets the requirements of the client.

System Analysts have the following responsibilities:

- Analyzing and understanding requirements of intended software
- Understanding how the project will contribute in the organization objectives
- Identify sources of requirement
- Validation of requirement
- Develop and implement requirement management plan
- Documentation of business, technical, process and product requirements

- Coordination with clients to prioritize requirements and remove and ambiguity
- Finalizing acceptance criteria with client and other stakeholders

Software Metrics and Measures

Software Measures can be understood as a process of quantifying and symbolizing various attributes and aspects of software.

Software Metrics provide measures for various aspects of software process and software product.

Software measures are fundamental requirement of software engineering. They not only help to control the software development process but also aid to keep quality of ultimate product excellent.

Let us see some software metrics:

- **Size Metrics** - LOC (Lines of Code), mostly calculated in thousands of delivered source code lines, denoted as KLOC.

Function Point Count is measure of the functionality provided by the software. Function Point count defines the size of functional aspect of software.

- **Complexity Metrics** - McCabe's Cyclomatic complexity quantifies the upper bound of the number of independent paths in a program, which is perceived as complexity of the program or its modules. It is represented in terms of graph theory concepts by using control flow graph.
- **Quality Metrics** - Defects, their types and causes, consequence, intensity of severity and their implications define the quality of product.

The number of defects found in development process and number of defects reported by the client after the product is installed or delivered at client-end, define quality of product.

- **Process Metrics** - In various phases of SDLC, the methods and tools used, the company standards and the performance of development are software process metrics.
- **Resource Metrics** - Effort, time and various resources used, represents metrics for resource measurement.

SOFTWARE DESIGN

Software design is a process to transform user requirements into some suitable form, which helps the programmer in software coding and implementation.

For assessing user requirements, an SRS (Software Requirement Specification) document is created whereas for coding and implementation, there is a need of more specific and detailed requirements in software terms. The output of this process can directly be used into implementation in programming languages.

Software design is the first step in SDLC (Software Design Life Cycle), which moves the concentration from problem domain to solution domain. It tries to specify how to fulfill the requirements mentioned in SRS.

Software Design Levels

Software design yields three levels of results:

- **Architectural Design** - The architectural design is the highest abstract version of the system. It identifies the software as a system with many components interacting with each other. At this level, the designers get the idea of proposed solution domain.
- **High-level Design**- The high-level design breaks the 'single entity-multiple component' concept of architectural design into less-abstracted view of sub-systems and modules and depicts their interaction with each other. High-level design focuses on how the system along with all of its components can be implemented in forms of modules. It recognizes modular structure of each sub-system and their relation and interaction among each other.
- **Detailed Design**- Detailed design deals with the implementation part of what is seen as a system and its sub-systems in the previous two designs. It is more detailed towards modules and their implementations. It defines logical structure of each module and their interfaces to communicate with other modules.

Modularization

Modularization is a technique to divide a software system into multiple discrete and independent modules, which are expected to be capable of carrying out task(s) independently. These modules may work as basic constructs for the entire software. Designers tend to design modules such that they can be executed and/or compiled separately and independently.

Modular design unintentionally follows the rules of ‘divide and conquer’ problem-solving strategy this is because there are many other benefits attached with the modular design of a software.

Advantage of modularization:

- Smaller components are easier to maintain
- Program can be divided based on functional aspects
- Desired level of abstraction can be brought in the program
- Components with high cohesion can be re-used again
- Concurrent execution can be made possible
- Desired from security aspect

Concurrency

Back in time, all softwares were meant to be executed sequentially. By sequential execution we mean that the coded instruction will be executed one after another implying only one portion of program being activated at any given time. Say, a software has multiple modules, then only one of all the modules can be found active at any time of execution.

In software design, concurrency is implemented by splitting the software into multiple independent units of execution, like modules and executing them in parallel. In other words, concurrency provides capability to the software to execute more than one part of code in parallel to each other.

It is necessary for the programmers and designers to recognize those modules, which can be made parallel execution.

Example

The spell check feature in word processor is a module of software, which runs alongside the word processor itself.

LECTURE NOTE-7

COUPLING & COHESION

When a software program is modularized, its tasks are divided into several modules based on some characteristics. As we know, modules are a set of instructions put together in order to achieve some tasks. They are though, considered as single entity but may refer to each other to work together. There are measures by which the quality of a design of modules and their interaction among them can be measured. These measures are called coupling and cohesion.

Cohesion

Cohesion is a measure that defines the degree of intra-dependability within elements of a module. The greater the cohesion, the better is the program design.

There are seven types of cohesion, namely –

- **Co-incident cohesion** - It is unplanned and random cohesion, which might be the result of breaking the program into smaller modules for the sake of modularization. Because it is unplanned, it may serve confusion to the programmers and is generally not-accepted.
- **Logical cohesion** - When logically categorized elements are put together into a module, it is called logical cohesion.
- **Temporal Cohesion** - When elements of module are organized such that they are processed at a similar point in time, it is called temporal cohesion.
- **Procedural cohesion** - When elements of module are grouped together, which are executed sequentially in order to perform a task, it is called procedural cohesion.
- **Communicational cohesion** - When elements of module are grouped together, which are executed sequentially and work on same data (information), it is called communicational cohesion.
- **Sequential cohesion** - When elements of module are grouped because the output of one element serves as input to another and so on, it is called sequential cohesion.
- **Functional cohesion** - It is considered to be the highest degree of cohesion, and it is highly expected. Elements of module in functional cohesion are grouped because they all contribute to a single well-defined function. It can also be reused.

Coupling

Coupling is a measure that defines the level of inter-dependability among modules of a program. It tells at what level the modules interfere and interact with each other. The lower the coupling, the better the program.

There are five levels of coupling, namely -

- **Content coupling** - When a module can directly access or modify or refer to the contents of another module, it is called content level coupling.
- **Common coupling**- When multiple modules have read and write access to some global data, it is called common or global coupling.
- **Control coupling**- Two modules are called control-coupled if one of them decides the function of the other module or changes its flow of execution.
- **Stamp coupling**- When multiple modules share common data structure and work on different part of it, it is called stamp coupling.
- **Data coupling**- Data coupling is when two modules interact with each other by means of passing data (as parameter). If a module passes data structure as parameter, then the receiving module should use all its components.

Ideally, no coupling is considered to be the best.

Design Verification

The output of software design process is design documentation, pseudo codes, detailed logic diagrams, process diagrams, and detailed description of all functional or non-functional requirements.

The next phase, which is the implementation of software, depends on all outputs mentioned above.

It is then becomes necessary to verify the output before proceeding to the next phase. The early any mistake is detected, the better it is or it might not be detected until testing of the product. If the outputs of design phase are in formal notation form, then their associated tools for verification should be used otherwise a thorough design review can be used for verification and validation.

By structured verification approach, reviewers can detect defects that might be caused by overlooking some conditions. A good design review is important for good software design, accuracy and quality.

SOFTWARE ANALYSIS & DESIGN TOOLS

Software analysis and design includes all activities, which help the transformation of requirement specification into implementation. Requirement specifications specify all functional and non-functional expectations from the software. These requirement specifications come in the shape of human readable and understandable documents, to which a computer has nothing to do.

Software analysis and design is the intermediate stage, which helps human-readable requirements to be transformed into actual code.

Let us see few analysis and design tools used by software designers:

Data Flow Diagram

Data flow diagram is a graphical representation of data flow in an information system. It is capable of depicting incoming data flow, outgoing data flow and stored data. The DFD does not mention anything about how data flows through the system.

There is a prominent difference between DFD and Flowchart. The flowchart depicts flow of control in program modules. DFDs depict flow of data in the system at various levels. DFD does not contain any control or branch elements.

Types of DFD

Data Flow Diagrams are either Logical or Physical.

- **Logical DFD** - This type of DFD concentrates on the system process and flow of data in the system. For example in a Banking software system, how data is moved between different entities.
- **Physical DFD** - This type of DFD shows how the data flow is actually implemented in the system. It is more specific and close to the implementation.

DFD Components

DFD can represent Source, destination, storage and flow of data using the following set of components -



Fig 1: DFD Components

- **Entities** - Entities are source and destination of information data. Entities are represented by rectangles with their respective names.
- **Process** - Activities and action taken on the data are represented by Circle or Round-edged rectangles.
- **Data Storage** - There are two variants of data storage - it can either be represented as a rectangle with absence of both smaller sides or as an open-sided rectangle with only one side missing.
- **Data Flow** - Movement of data is shown by pointed arrows. Data movement is shown from the base of arrow as its source towards head of the arrow as destination.

Levels of DFD

- **Level 0** - Highest abstraction level DFD is known as Level 0 DFD, which depicts the entire information system as one diagram concealing all the underlying details. Level 0 DFDs are also known as context level DFDs.

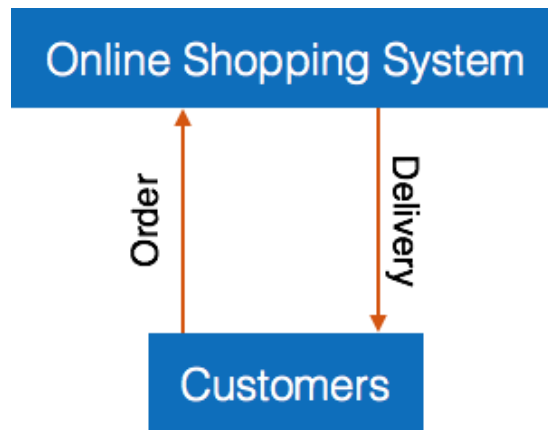


Fig 1: Level 0 DFD of Online Shopping System

- Level 1** - The Level 0 DFD is broken down into more specific, Level 1 DFD. Level 1 DFD depicts basic modules in the system and flow of data among various modules. Level 1 DFD also mentions basic processes and sources of information.

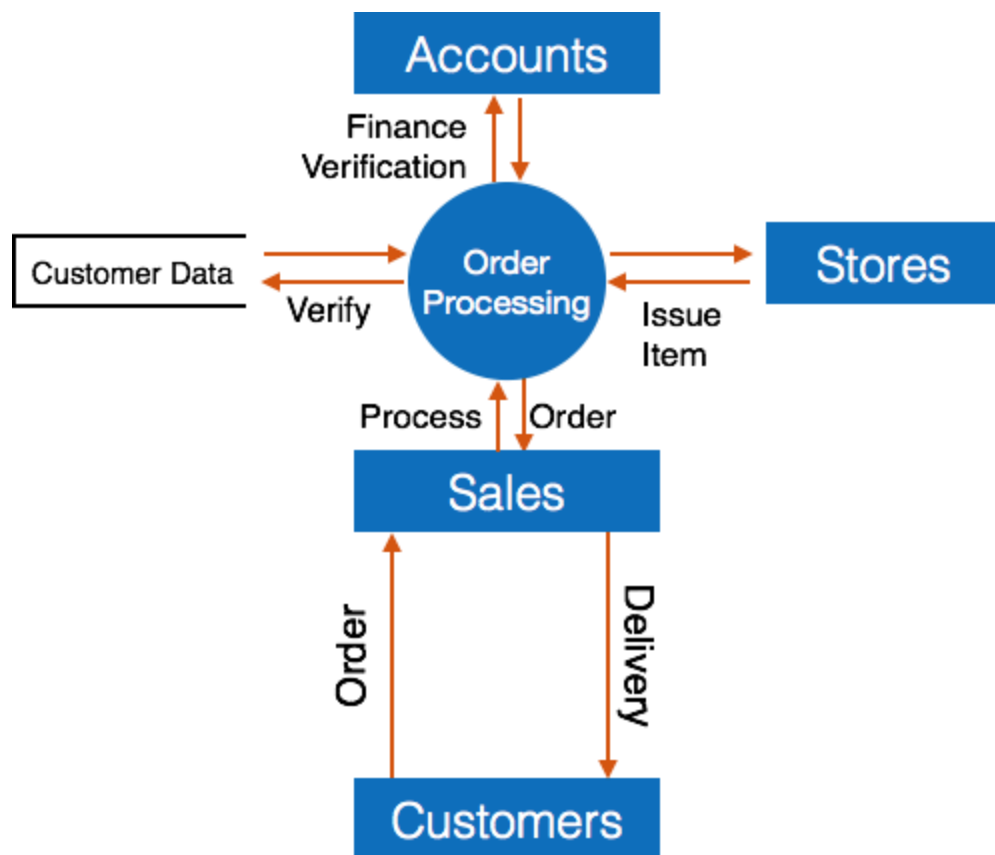


Fig 2: Level 1 DFD of Online Shopping System

- **Level 2** - At this level, DFD shows how data flows inside the modules mentioned in Level 1.

Higher level DFDs can be transformed into more specific lower level DFDs with deeper level of understanding unless the desired level of specification is achieved.