


Consider an undirected graph consisting of n nodes where each node is labeled from 1 to n and the edge between any two nodes is always of length 6 . We define node s to be the starting position for a BFS. Given a graph, determine the distances from the start node to each of its descendants and return the list in node number order, ascending. If a node is disconnected, its distance should be -1 .

For example, there are $n = 6$ nodes in the graph with a starting node $s = 1$. The list of *edges* = $[[1, 2], [2, 3], [3, 4], [1, 5]]$, and each has a weight of 6 .

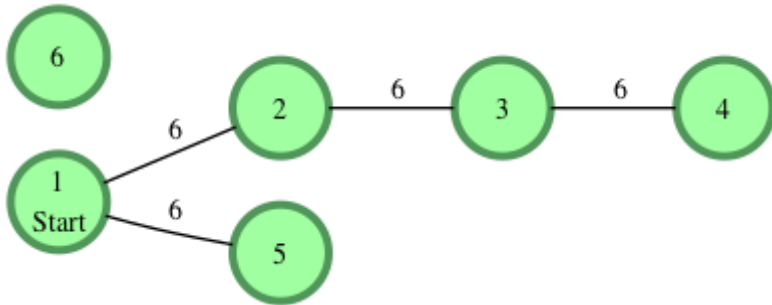

Starting from node 1 and creating a list of distances, for nodes 2 through 6 we have *distances* = $[6, 12, 18, 6, -1]$.

Function Description

Define a Graph class with the required methods to return a list of distances.

Input Format

The first line contains an integer, q , the number of queries.

Each of the following q sets of lines is as follows:

- The first line contains two space-separated integers, n and m , the number of nodes and the number of edges.
- Each of the next m lines contains two space-separated integers, u and v , describing an edge connecting node u to node v .
- The last line contains a single integer, s , the index of the starting node.

Constraints

- $1 \leq q \leq 10$
- $2 \leq n \leq 1000$
- $1 \leq m \leq \frac{n \cdot (n-1)}{2}$
- $1 \leq u, v, s \leq n$

Output Format

For each of the q queries, print a single line of $n - 1$ space-separated integers denoting the shortest distances to each of the $n - 1$ other nodes from starting position s . These distances should be listed sequentially by node

number (i.e., $1, 2, \dots, n$), but should not include node s . If some node is unreachable from s , print -1 as the distance to that node.

Sample Input

2
4 2
1 2
1 3
1
3 1
2 3
2


Sample Output

6 6 -1
-1 6

Explanation


We perform the following two queries:

1. The given graph can be represented as:

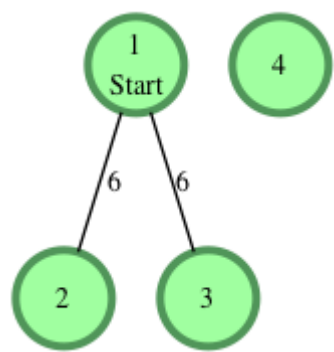

where our start node, s , is node 1 . The shortest distances from s to the other nodes are one edge to node 2 , one edge to node 3 , and there is no connection to node 4 .

2. The given graph can be represented as:



where our start node, s , is node **2**. There is only one edge here, so node **1** is unreachable from node **2** and node **3** has one edge connecting it to node **2**. We then print node **2**'s distance to nodes **1** and **3** (respectively) as a single line of space-separated integers: -1 6.

Note: Recall that the actual length of each edge is **6**, and we print **-1** as the distance to any node that's unreachable from s .