

Memoir Template



Author's Name

Memoir Template

Tristan Lafont Rapnouil, Mathilde
Brunel & Marie Simonin

This document is reproducible thanks to:

- L^AT_EX and its class memoir (<http://www.ctan.org/pkg/memoir>).
- R (<http://www.r-project.org/>) and RStudio (<http://www.rstudio.com/>)
- bookdown (<http://bookdown.org/>) and memoirR (<https://ericmarcon.github.io/memoiR/>)



Name of the owner of the logo

<http://www.company.com>

An explanatory sentence. Leave an empty line for line breaks.

Contents

Contents	v
Introduction	vii
1 Data framework	1
2 Getting Started	3
2.1 index.Rmd	3
2.2 __bookdown.yml	6
2.3 __output.yml	6
2.4 Multilingual documents	6
3 Syntax	7
3.1 Write	8
3.2 R code	8
3.3 Figures	9
3.4 Tables	11
3.5 Maths	12
3.6 Cross-references	12
3.7 Bibliography	13
3.8 Forcing line breaks	13
3.9 Languages	13
3.10 Chapter summary	14
3.11 Local table of contents	14
3.12 Boxed text	14
3.13 Documentation	16
User documentation	16
Documentation for developers	16
Bibliography	17
List of Figures	19

Introduction

Plant microbial INHERitance across generations through SEEDs: impact of this primary inoculum on plant fitness and microbiota assembly

This document acts as a wiki-like platform regarding all protocols and data treatment within the INHERSEED project. The project is lead by Marie Simonin (PI - INSERT WEBSITE), Tristan Lafont Rapnouil is a post-doc in charge of monitoring the project progress and data acquisition and, Mathilde Brunel is a technician involved in greenhouse managing and wetlab experimentations.

While not all data and protocols can be hosted on Github, links to where they are actually findable are persented in this document.

For any questions related to this project, you can contact marie.simonin@inrae.fr and/or tristan.lafontrapnouil@gmail.com.

Data framework

INHERSEED aims to respect the FAIR principles for open science. To do so we share in the present document protocols, raw data, processing scripts/procedures and, processed data as used in resulting articles 1.1.

Data			
Acquisition	Raw	Processing	Data for publications
Protocols	phenotype: Pictures, tables	extract data from photos and format tables	RData & .csv
	metabar: sequences	run bioinfo	RData & .csv

Figure 1.1: Shared info regarding acquisition, raw data, processing and published data in the INHERSEED project

To ensure reproducibility data standard processing (bioinformatic pipeline and diagnostics) were embedded in snakemake pipeline. R session info were also stored as text files available here. The Data Management Plan is hosted here.

Deliverables of the project are:

- Data, protocols and workflows:
 - github hosted document (Text)
 - Metabarcoding dataset: amplicon sequencing dataset as .fastq for 16s and ITS markers. (Dataset)
 - Processing scripts and pipelines (Python, Bash and R). (Work-flow)
 - Protocols for all data acquisition (Text)
- Results: **WP1**:
 - Plant taxonomy and traits influence on seed microbiota

1. DATA FRAMEWORK

- Assessment of microbial transmission from plants to seeds
- Exploring phylosymbiosis on seed microbiota **WP2**:
- Evaluation of microbial transmission from seeds to seedlings
- Inherited and non-inherited taxa transmission success
- Exploring phylosymbiosis on seedling microbiota

#links to data info

- [Project proposal](#)
- [Original seeds sources]
 - [species list]
 - [suppliers]
- [Seed phenotype]
 - [Seed pictures]
 - [TRAITOR software]
- [DNA extractions]
 - [Seeds]
 - [Leaves]
 - [Roots]
 - [Soil]
- [Plant phenotype]

Getting Started

RStudio in version higher than 1 must be used. The **bookdown** package must be installed.

For the creation of the PDF file, an installation of LaTeX is necessary. Under Windows, use [MikTeX](#). The automatic download of missing packages (under Windows: MiKTeX settings, *Install missing packages=Yes*) is required.

The main file is *index.Rmd* which contains the description of the book in its header. All other *.Rmd* files in the folder contain a chapter: the order of chapters is that of the file names, sorted alphabetically. The *references.bib* file contains the bibliography.

The basic parameters of the project must be entered in the following files.

2.1 index.Rmd

In the file header, enter the title of the work and the name of the author(s).

```
title: "Title of the Memoir"
author: "Authors' names"
```

The date field may be kept to display the knitting date automatically.

The `url` field contains the link to the GitHub pages of the project. It is used by `build_readme()`.

The `github-repo` field contains the name of the repository of the project on GitHub. It is used to build a link to the repository from the menu bar of the GitBook version of the document.

`description` is used by `build_readme()` and to build an HTML meta tag intended for search engines. `cover-image` is the name of an image file that will be used by social networks when the GitBook is shared. Twitter uses both to build a link to the project. If a PDF file is used as the PDF book cover (see below), a good idea is to export it to PNG and declare the PNG file in `cover-image`.

The cover will be:

- that of a book if the *maintitlepage* statement is present. The content of *epigraph* and *credits* will be written on page 2, with `images/logo.pdf`.
- the first page of the PDF file declared in the *pdftitlepage* instruction if it is present.

Delete one of the two instructions in the header or both covers will be built, like in the gallery¹.

The languages are specified according to the IETF language tags, such as “en-US”. The main language (`lang`) is that of the structure of the document, translating elements such as “chapter”. The other languages (`otherlangs`) can be used to switch language inside the PDF document to benefit from correct hyphenation.

The name of the `.bib` file containing the references is in `bibliography`. It must be entered with its `.bib` extension.

The default citation style in HTML outputs is `chicago-author-date.csl`. Any valid csl file can be used: uncomment the line and enter the file name. Note that PDF outputs use their own style: see below.

LaTeX specific options are:

- *documentclass*: the document class is *memoir* for this template. The options of the *memoir* class are listed, not to be changed normally.
- *papersize*: A4.
- *fontsize*: 11pt.
- *mainfont* and *mathfont* may replace the standard Computer Modern font. Tex Gyre fonts² are a good choice. Both **tex-gyre** and **tex-gyre-math** LaTeX packages must be available.
- *MemoirChapStyle* and *MemoirPageStyle* define the style of the document. Two styles are favored: *companion* for documents with large outer margins containing notes, references and captions, or *daleif1* and *Ruled* for more classical layouts with small margins.
- Margins: choose whether to use *largemargins* or not, and adjust the other parameters according to that. Margin values should work well in most cases.

¹<https://ericmarcon.github.io/memoiR/gallery/memoir/MyBook.pdf>

²<https://www.ctan.org/pkg/tex-gyre>

- *toc-depth*: number of levels in the table of contents, 2 by default (i.e. ### subsections are shown).
- *secnum-depth*: The lowest numbered level in the document. Default is **section** (i.e. ##). Alternatives are **chapter** (i.e. #), **subsection** (i.e. ###) or **subsubsection** (i.e. ####).
- *lot* and *lof* to add lists of tables and figures.

Bibliography is managed by BibLaTeX, whose options should not be changed except for the style. It is **verbose-inote** in documents with large margins to show the full citations in them. The citations are called as notes in the text. **authoryear-ibid** is suited for small-margin documents: the citations in the text contain author and year, and no footnote is used. The line **pageref=true** must be deleted or commented out if this style is used or an error may occur during LaTeX compilation.

longbibliography formats the bibliography on two columns with a small font when it is set to **true**. If **false**, the regular font is used in a single column with small margins.

The back cover appears in PDF outputs only. It is designed to to display abstract and keyword in several languages if necessary. The items of **backcover** are a list:

- *language*: the name of the language, that will be passed to the LaTeX command `\selectlanguage{}`.
- *abstract*: the content of the abstract.
- *keywords*: a list of keywords.
- *abstractlabel* and *keywordlabel*: the localized text to print before abstract and keywords.

backcoverfontsize may be changed better fit the page size, according to the length of the abstracts.

Some options should not be modified, including:

- *fig_crop*: yes to allow cropping of excess margins of figures. GhostScript must be installed. If it is not, or in order to save computing time, the option may be set to **no**.

Some may be added to the header:

- *fontfamily*: **font**, *lmodern* by default.
- *linestretch*: line spacing, 1 by default.

For a student thesis, prepare the cover page with Word, Powerpoint or a DTP program and save it in PDF format, in A4 size. Only the first page of the PDF is used.

2.2 `__bookdown.yml`

Enter the name of the Rmd file that will be the result of the merging of all chapters and choose if it should be destroyed after use. It will also be the name of the PDF and Word files. The default options will suit most uses.

```
book_filename: "MyBook"
delete_merged_file: true
```

If the project is hosted on GitHub, indicate its address. Otherwise, delete the line.

```
repo: "https://github.com/GitHubID/Repository"
```

The knitted files are stored in the output directory. `docs` is the good choice for GitHub Pages.

2.3 `__output.yml`

Customize the table of contents in HTML format.

```
config:
  toc:
    before: |
      <li><a href=".">Bookdown book</a></li>
    after: |
      <li><a href="https://github.com/GitHubID/Repository">
```

Update the repository in the bs4 book options.

```
bookdown::bs4_book:
  repo: https://github.com/GitHubID/Repository
```

2.4 Multilingual documents

Languages are declared in the document header.

The main language of the document (`lang`) changes the name of some elements, such as the table of contents. To use other languages in the text, they must be declared in `otherlangs`.

Changing the language has no effect in HTML, but changes hyphenation in PDF output.

The language change in basic markdown format,

```
::: {lang=en-US}
```

is not supported by R Markdown. See the correct syntax in section 3.9.

CHAPTER 3

Syntax



In a Nutshell

- Deliver the take-home message here.
- It can contain several paragraphs.

The syntax of *R Markdown* extended by *Bookdown* is recalled here.

In RStudio, create a new document of type Document R Markdown. The wizard allows you to choose between different formats.

Click on *From template*: from templates installed by packages. The *memoiR* package templates are displayed: choose *Memoir*.

Each chapter of the book is an Rmd file, whose name normally starts with its number (e.g. `01-intro.Rmd`). All Rmd files in the project folder are actually treated as chapters, sorted by file name, including those provided by the template (startup and syntax) which should be deleted except for `99-references.Rmd` which contains the bibliography, placed at the end. The `index.Rmd` file is special: it contains the document header and the first chapter.

Each other file starts with a top-level title:

```
# Title of the Chapter
```

If the document is made of parts containing chapters, the file with the first chapter of each part must start with:

```
# (PART) Title of the Part {-}
```

```
# Title of the Chapter
```

Note the `{-}` instruction after the title of the part to avoid having it numbered.

Appendices are introduced as a special part:

```
# (APPENDIX) Appendix {-}  
# Title of the first appendix
```

3.1 Write

The main features of Markdown are summarized here. A quick and complete training is offered by RStudio¹.

The text is written without any formatting other than line breaks. A simple line break has no effect on the document produced: it allows to separate sentences to simplify the tracking of the source code by git.

A line break marks a paragraph change.

The different levels of the plan are designated by the number of braces at the beginning of the line: `#` for a level 1 title, `##` for a level 2 title, etc. A space separates the hashes and the title text.

Bullet lists are marked by a dash (followed by a space) at the beginning of the line. An empty line is required before the beginning of the list, but the elements of the list are separated by a simple line break. Indented lists are created by inserting 4 spaces before the dash at the beginning of the line. Last, numbered lists are created in the same way by replacing the hyphens by numbers, whose value does not matter.

In the text, the italicized parts are surrounded by a star or an underscore (`*italic*`), while two stars mark the bold.

3.2 R code

R code is included in code chunks (*code chunks*) that are easily created by clicking on the “Insert a new code chunk” button above the source code window in RStudio. They start and end with three quotation marks on a new line. These code chunks can contain R code but also Python code for example: the type of code is indicated in the header on the first line, before the name of the code chunk, then a comma separated list of options, for example:

```
```{r}  
#| label: cars
#| echo: true
```
```

The name and options are optional: the minimum header is `{r}`.

¹<https://rmarkdown.rstudio.com/lesson-1.html>

The most useful options are:

- `echo` to show (`=TRUE`) or hide (`=FALSE`) the code.
- `message=FALSE` to hide the opening messages of some packages.
- `warning=FALSE` to hide warnings.

The default options are declared in the code snippet named “Options” at the beginning of the Markdown document, in the `opts_chunk$set()` function. The `echo` option should be set to `FALSE` by default for a scientific article for example.

When it is `TRUE`, the code is printed as follows

```
2 + 2
```

```
## [1] 4
```

3.3 Figures

```
plot(pressure)
```

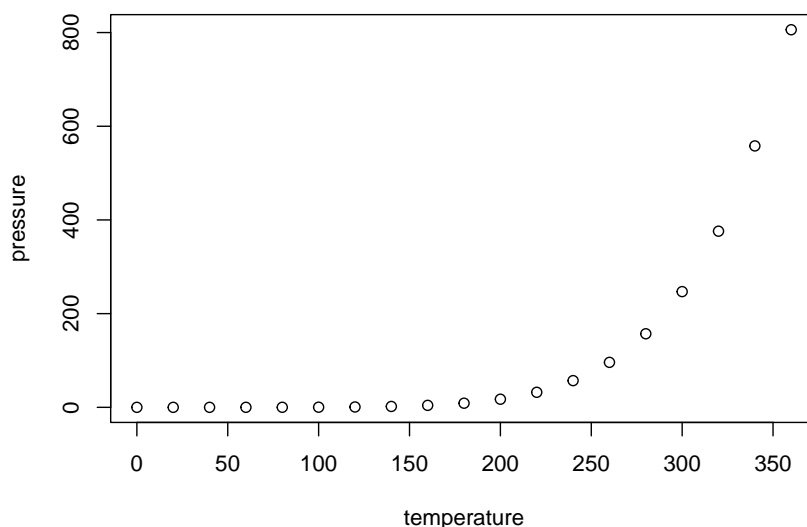


Figure 3.1: A figure

Figures can be created by the R code (figure 3.1). With Bookdown, a label is associated with each figure: its name is `fig:xxx` where `xxx` is the name of the R code snippet. References are made with the command `\@ref(fig:xxx)`.

The header of the code snippet of the figure 3.1 is:

```
```{r}
#| label: pressure
#| fig-cap: "Title of the figure"
```
```

It contains at least the name of the figure and its caption.

The default width of figures is set in the option chunk in `index.Rmd`. It is `out.width='80%'` in this template, i.e. 80% of the width of the text. If a full-width figure is needed, including the margin width, use `out.width='\\widthw'` in its code chunk header.

When large margins are used in memoirs, figure captions are set in the margins of PDF outputs. Margins can be used to enlarge a figure: add knitr options `out.width='\\widthw'` and `fig.env='figure'` in the code chunk header. Figure alignment must be `fig.align = 'center'` (which is by default). The caption is then inserted below the figure. Small figures can be put in the margin by the option `fig.env='marginfigure'`. These changes are ignored in the HTML output.

If the caption is long, the header is not easy to read. Also, the caption is limited to simple text. For more elaborate captions, it is possible to declare the caption in a separate paragraph that begins with the text `(ref:FigureName)`. The figure 3.2 benefits from an improved caption.

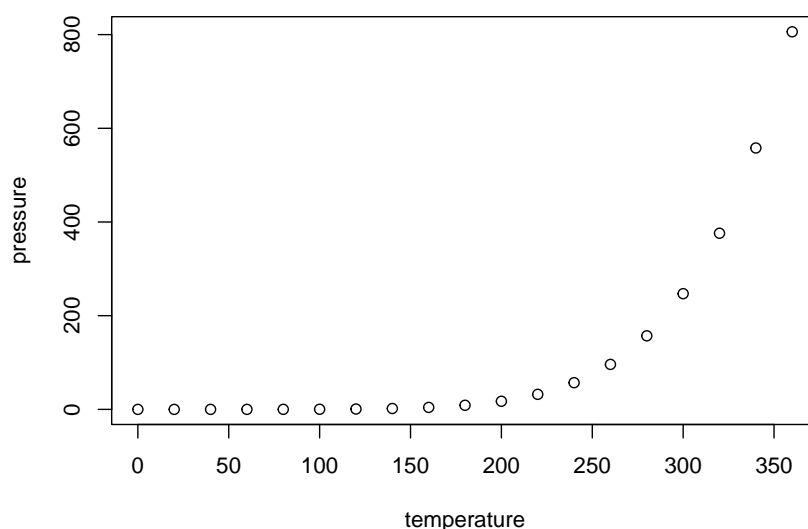


Figure 3.2: Title with *italic*, math ($\sqrt{\pi}$) and reference to figure 3.1

The text in `fig.cap`, “Title of figure” previously, is replaced by `(ref:pressure)` *within the quotation marks* and the caption is entered in a paragraph starting with `(ref:pressure)` followed by a space. Captions are limited to a single paragraph. They should not contain bibliographic references or references to the figures may not find them: if necessary, cite the source of a figure in the text.

Figures that are not created by R but come from files are embedded in a piece of code by the `include_graphics()` function whose argument is the file containing the image to be displayed. Always place these files in the `images` folder for good organization.

3.4 Tables

The horizontal `-` and vertical separators `|` allow you to draw a table according to Markdown syntax, but this is not the best method.

Tables can also be produced by R code. The content of the table is in a dataframe. The `kbl()` function in the *kableExtra* package (which enhances the original `kable()` function from *knitr*) prepares the table for display and passes the result to the `kable_styling` function for final formatting.

```
names(iris) <- c("Sepal length", "Width", "Petal length", "Width",
  "Species")
kableExtra::kbl(head(iris), caption = "Table created by R", longtable = TRUE,
  booktabs = TRUE) |>
  kableExtra::kable_styling(bootstrap_options = "striped",
    full_width = FALSE)
```

Table 3.1: Table created by R

| Sepal length | Width | Petal length | Width | Species |
|--------------|-------|--------------|-------|---------|
| 5.1 | 3.5 | 1.4 | 0.2 | setosa |
| 4.9 | 3.0 | 1.4 | 0.2 | setosa |
| 4.7 | 3.2 | 1.3 | 0.2 | setosa |
| 4.6 | 3.1 | 1.5 | 0.2 | setosa |
| 5.0 | 3.6 | 1.4 | 0.2 | setosa |
| 5.4 | 3.9 | 1.7 | 0.4 | setosa |

The caption is specified by the `caption` argument and referencing is possible because the table receives a label whose name is `tab:` followed by the name of the code snippet (table 3.1). Always use the `booktabs = TRUE` argument so that the thickness of the separator lines is optimal in LaTeX. The `bootstrap_options = "striped"` option provides more readable tables in HTML.

In LaTeX, tables can have the width of the column and possibly span multiple pages (`longtable = TRUE`), or use the width of the page (`longtable = FALSE`), like table 3.2.

This table contains mathematics: the `escape = FALSE` option is necessary.

Finally, the `full_width = FALSE` option adjusts the width of the table to its content instead of occupying all the available width. It must be `TRUE` for correct formatting of two-column tables, i.e. with `longtable = FALSE` in LaTeX.

The content of table cells can be formatted following the Markdown syntax, with some limits due to *kableExtra*: the argument `format="markdown"` is necessary in `kbl()` or LaTeX output will ignore formatting, but this is not compatible with `full_width = TRUE` in `kable_styling()`. See *kableExtra*'s documentation to format rows or columns globally without using Markdown (e.g. function `row_spec()`). The header of 3.2) is set to bold this way.

Table 3.2: Disturbance intensity of the 4 plot treatments in Paracou.

| Treatment | Timber | Thinning | Fuelwood | %AGB lost |
|-----------|---|--|--|-------------|
| Control | | | | 0 |
| T1 | DBH ≥ 50
cm,
commercial
species, \approx
10 trees/ha | | | [12% – 33%] |
| T2 | DBH ≥ 50
cm,
commercial
species, \approx
10 trees/ha | DBH ≥ 40
cm, non-
valuable
species, \approx
30 trees/ha | | [33% – 56%] |
| T3 | DBH ≥ 50
cm,
commercial
species, \approx
10 trees/ha | DBH ≥ 50
cm, non-
valuable
species, \approx
15 trees/ha | 40 cm \leq
DBH ≤ 50
cm, non-
valuable
species, \approx
15 trees/ha | [35% – 56%] |

3.5 Maths

Equations in LaTeX format can be inserted in line, like $A = \pi r^2$ (code: `$A=\pi r^2$`) or isolated (the \$ are doubled) like

$$e^{i\pi} = -1.$$

They can be numbered: see equation (3.1), using the `\equation` environment.

$$A = \pi r^2. \tag{3.1}$$

The numbered equation is created by the following code:

```
\begin{equation}
  A = \pi r^2.
  \label{eq:disk}
\end{equation}
```

3.6 Cross-references

Figures and tables have an automatically generated label, identical to the name of the code snippet prefixed with `fig:` and `tab:`.

For equations, the label is added manually by the code (`\#eq:xxx`) before the end of the equation.

Sections can be tagged by ending their title with `{#yyy}`.

In all cases, the call to the reference is made by the command `\@ref()`.

3.7 Bibliography

Bibliographic references in bibtex format must be included in the `.bib` file declared in the header of the Markdown document.

```
bibliography: references.bib
```

They can be called in the text, between brackets by the code `[@CitationKey]`, as sidenotes (Xie 2016), or without square brackets, to include the authors' names in the text, such as Xie et al. (2018) .

Bibliography is handled by pandoc when producing Word or HTML documents. The bibliographic style can be specified, by adding the line

```
csl:file_name.csl
```

in the document header and copying the `.csl` style file into the project folder. The default style (if no `csl` is specified) is “chicago-author-date”. Several thousand styles are available ².

For PDF documents, the bibliography is handled by BibLaTeX, see section 2.1.

3.8 Forcing line breaks

Hyphenation is handled automatically in LaTeX. If a word is not hyphenated correctly, add its hyphenation in the preamble of the file with the command `hyphenation` (words are separated by spaces, hyphenation locations are represented by dashes).

If LaTeX can't find a solution for the line break, for example because some code is too long a non-breaking block, add the LaTeX command `\break` to the line break location. Do not leave a space before the command. The HTML document ignores LaTeX commands.

3.9 Languages

Languages are declared in the document header.

The main language of the document (`lang`) changes the name of some elements, such as the table of contents. The change of language in the document (one of `otherlangs`) is managed in LaTeX but not in HTML by inserting on a new line the following command:

²<https://github.com/citation-style-language/styles>

```
\selectlanguage{english}
```

The current language has an effect only in LaTeX output: a space is added before double punctuation in French, the size of spaces is larger at the beginning of sentences in English, etc. The `\selectlanguage` command is simply ignored in HTML.

Language codes are used in the header, such as `en-US` but language names are necessary in `\selectlanguage{}`. Name matches are listed in table 3 of the polyglossia package documentation³.

3.10 Chapter summary

The take-home message of each chapter can be displayed in a box, see the beginning of this one. The code is that of a code block of type “Summary”.

```
::: {.Summary data-latex=""}  
Some text for this block.  
:::
```

Its heading text is set in the header of `index.Rmd`:

```
chaptersummary: In a Nutshell
```

Note that the chapter summaries are formatted as simple text in Word outputs.

3.11 Local table of contents

At the beginning of each chapter of the PDF document, a local table of content can be added with the following code:

```
\toc{1}
```

It is ignored in HTML. 1 is the depth of the table of contents: sections of the chapters are included. It can be changed for 2 to display subsections too, and so on.

3.12 Boxed text

Boxed text allows summarizing important points out of the main text. An example is given here, to define the Pythagorean theorem.

³<http://mirrors.ctan.org/macros/unicodetex/latex/polyglossia/polyglossia.pdf>

Pythagorean theorem

For a right triangle, if c denotes the length of the hypotenuse and a and b denote the lengths of the other two sides, we have

$$a^2 + b^2 = c^2$$

These boxes are included in the document as fenced blocks, whose syntax is as follows:

```
:::{#pythbox .greybox data-latex='[frametitle=Pythagorean theorem]'
title='Pythagorean theorem'}
For a right triangle, if $c$ denotes the length of the hypotenuse
and $a$ and $b$ denote the lengths of the other two sides, we have

$$a^2 + b^2 = c^2$$
:::
```

The text block is delimited by `:::` instead of the backquotes of code chunks. The header of the block contains its name, prefixed by `#`. The type of block follows, here: `.greybox`. Arguments `data-latex` and `title` contain the title of the box in the PDF and HTML outputs, so a referenced text caption is useful to avoid repeating it. Enter it in a paragraph starting with `(ref:pythbox)` followed by a space. Then, call the text with the code `(ref:pythbox)`. This technique is identical to that used for elaborate figure captions. Note the particular syntax of the title in the PDF output.

Grey text boxes (`.greybox`) are provided by the memoir template. Advanced users can define other colored boxes, say a yellow box, following the next steps:

- Obtain the HTML code of the color, for instance with a color picker⁴. `ffff66` is suitable for yellow.
- In `latex/preamble.tex`, define the color by adding the following line below the definition of the grey color:

```
\definecolor{yellow}{HTML}{FFFF66}
```

- Also define the text box environment by duplicating the `greybox` item and replacing `grey` with `yellow` three times:

```
\newmdenv[
  style=boxstyle,
  backgroundcolor=yellow,
  frametitlebackgroundcolor=yellow,
]{yellowbox}
```

- In `style.css`, duplicate all lines that define “Grey text box”, including the starting and ending comment lines. Replace `.greybox` with

⁴https://www.w3schools.com/colors/colors_picker.asp

`.yellowbox` everywhere, “Grey” with “Yellow” in the comments and change the `background-color` with `#ffff66`.

- In the text, use the same syntax as above but declare the class of the fenced block as `.yellowbox` instead of `.greybox`.

3.13 Documentation

User documentation

- The book [bookdown: Authoring Books and Technical Documents with R Markdown](#) by Yihui Xie, the author of **bookdown** and **knitr**. All the necessary details for writing (writing equations, cross-references, etc.) are given.
- The [R Markdown cheat sheet](#) for the syntax.

Documentation for developers

- [LaTeX file format customization](#).
- The [Pandoc manual](#) for possible options in the YAML header.

This template is based on *Bookdown* and the *Memoir* LaTeX class to allow writing a book, a report, a PhD thesis, etc. in *R Markdown*.

The main file is *index.Rmd* which contains the description of the book in its header. All other *.Rmd* files in the folder contain a chapter. The *references.bib* file contains the bibliography.

This file will have to be deleted, as well as *81-getting_started.Rmd* and *82-syntax.Rmd*: they have to be replaced by the content of the book.

To get started, create a new R project from this folder. Then open *index.Rmd* and click on the *Build Book* button in the *Build* window of Rstudio.

Bibliography

- Xie, Y. (2016). *bookdown: Authoring Books and Technical Documents with R Markdown*. Boca Raton, Florida: Chapman and Hall/CRC. URL: <https://github.com/rstudio/bookdown> (cit. on p. 13).
- Xie, Y., J. Allaire, and G. Golemund (2018). *R Markdown: The Definitive Guide*. Boca Raton, Florida: Chapman and Hall/CRC. URL: <https://bookdown.org/yihui/rmarkdown> (cit. on p. 13).

List of Figures

| | | |
|-----|---|----|
| 1.1 | Shared info regarding acquisition, raw data, processing and published data in the INHERSEED project | 1 |
| 3.1 | A figure | 9 |
| 3.2 | Title with <i>italic</i> , math ($\sqrt{\pi}$) and reference to figure 3.1 | 10 |

Abstract English abstract, on the last page.

This is a bookdown template based on LaTeX memoir class.

Keywords Keyword in English, As a list.

