Troubleshooting Guide

Choose the Broadband Issue You Are Experiencing:

1) Issue 1 – No Internet Connection

Step 1	Step 1: Check the RF Cable for Damage or Loose Connections
	
	• Ensure the RF cable has no kinks, cuts, or physical damage.
	• Make sure all cables are securely connected to the modem and transceiver:
	  ○ Screw in the RF cable fully by turning it clockwise.
	  ○ Gently shake the connection—it should be firm and not loose.
		
		 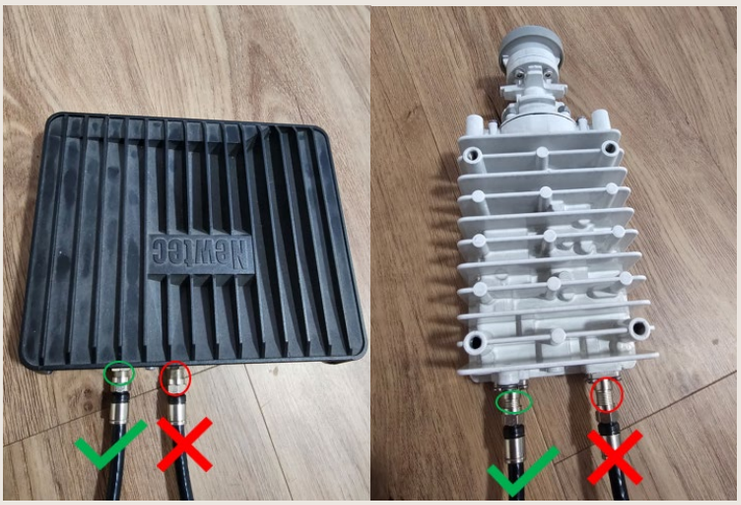

Step 2	Restart (Power Cycle) the VSAT Modem and Wi-Fi Router • Turn off the VSAT modem and Wi-Fi router. • Wait 2 minutes before turning them back on.	
Step 3	Ensure the Modem is Connected to the WAN Port of the Wi-Fi Router • Connect the modem to the WAN/Internet port on your Wi-Fi router using an Ethernet (RJ45) cable. • The WAN/Internet port is usually labelled on the router.	

<table>
<tr>
<td>Step 4</td>
<td>Check your Modem LED status.</td>
<td>

LED Indicators and Descriptions

<table>
<tr><th></th><th>Lighting Warning</th><th>Description</th></tr>
<tr><td>1</td><td>Power LED</td><td>White continuous - when powered up.</td></tr>
<tr><td>2</td><td>RX indicator LED</td><td>White continuous - forward satellite signalling receiving.</td></tr>
<tr><td>3</td><td>TX indicator LED</td><td>White blinking / continuous - traffic transmitted via the satellite link.</td></tr>
<tr><td>4</td><td>Warning LED</td><td>Yellow continuous - when the terminal is not logged on to the satellite network.</td></tr>
</table>
</td>
</tr>
</table>

Issue 2 – Slow Internet Speed

Step 1	Perform a Kacific Speed Test • Connect your laptop directly to the modem via an Ethernet cable, or use Wi-Fi (ensure your device is close to the router). • Open your web browser and go to http://172.18.2.10/speedtest/ • If you get a security warning, click "Advanced" and then "Proceed to 172.18.2.10".	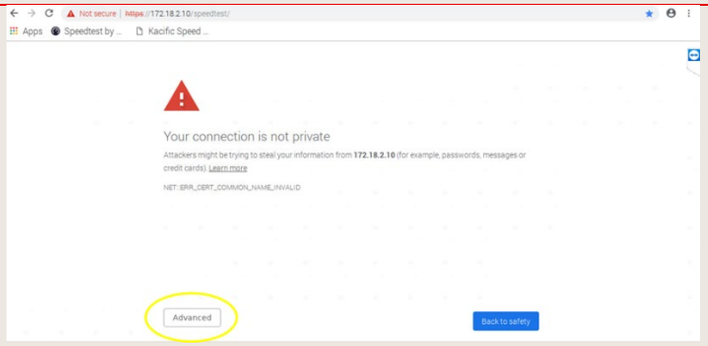 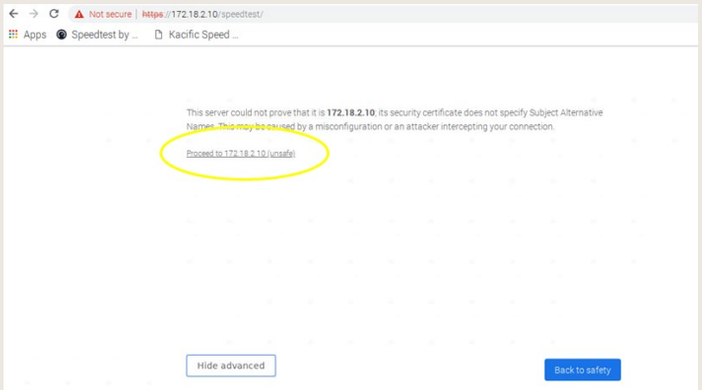
Step 2	• Connect your laptop directly to the modem via an Ethernet cable, or use Wi-Fi (ensure your device is close to the router). • Open your web browser and go to http://172.18.2.10/speedtest/. • If you get a security warning, click "Advanced" and then "Proceed to 172.18.2.10".	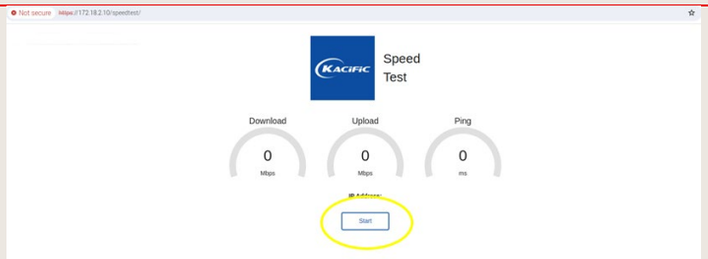 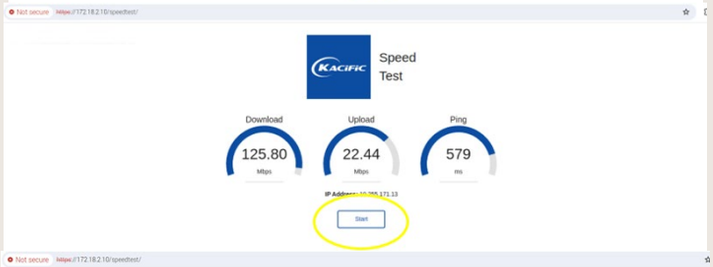 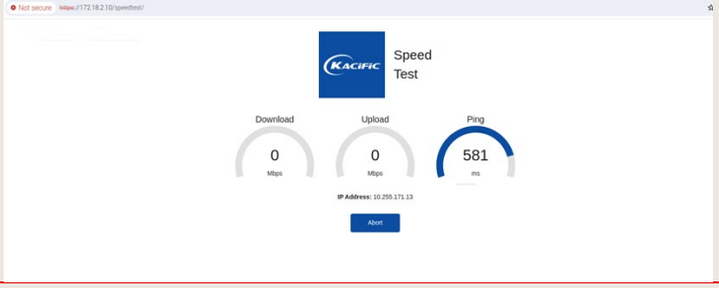

Step 3	Improve Your Speed if Results Are Unsatisfactory
	
	• **Disconnect unnecessary devices** from the network and rerun the test.
	• **Optimize Wi-Fi placement**:
	  ○ Place the Wi-Fi router in a **central location**, away from metal objects and electronics.
	  ○ Avoid placing it near thick walls or obstructions.
	• **Check Wi-Fi signal strength**:
	  ○ Weak signals cause slow speeds. Use apps like **Wi-Fi Analyzer** to check signal strength.
	  ○ If the signal strength is below **-70 dBm**, try moving closer to the router or adjusting its placement.
		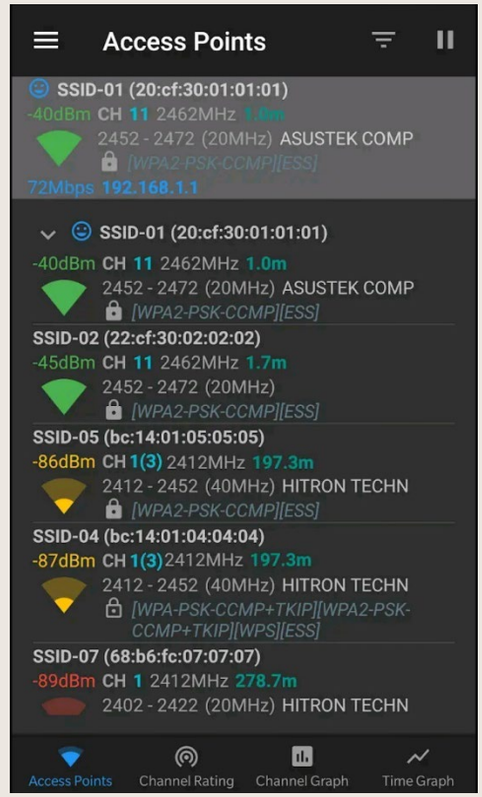

Issue 3 – Frequent Disconnection

Step 1	Check for Overheating • Touch the **modem**—if it feels hot, overheating may be the issue. • Ensure at least **30x30x30 cm of free space** around the modem for proper heat dissipation.	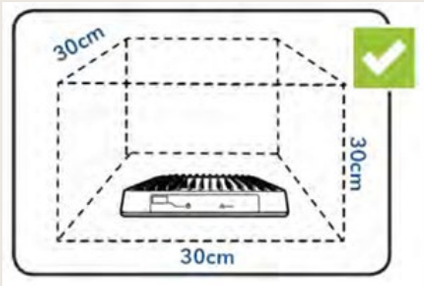

Issue 4 – Problems with the Satellite Modem

Step 1	Check for Rain Fade or Signal Loss
	
	• **Heavy rain** can weaken the satellite signal, causing slow speeds or disconnections. The connection should improve once the weather clears.
	• **Check the antenna's line of sight**:
	  ○ Ensure there are **no obstructions** (trees, buildings, etc.).
	  ○ Clear **snow or debris** from the antenna if necessary.
		
		 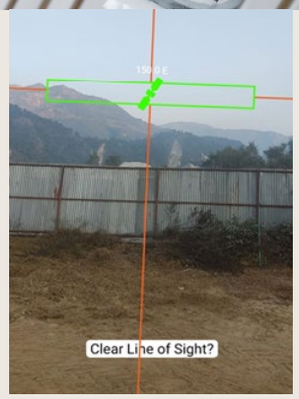

Step 2	Access the Modem GUI for Further Diagnostics • **Connect your laptop directly to the modem** via Ethernet, or use Wi-Fi through the connected router. • Open a web browser and enter **192.168.1.1** to access the modem's **GUI (Graphical User Interface)**. • Navigate to the **Summary Page** and **share the status details** with our support team.	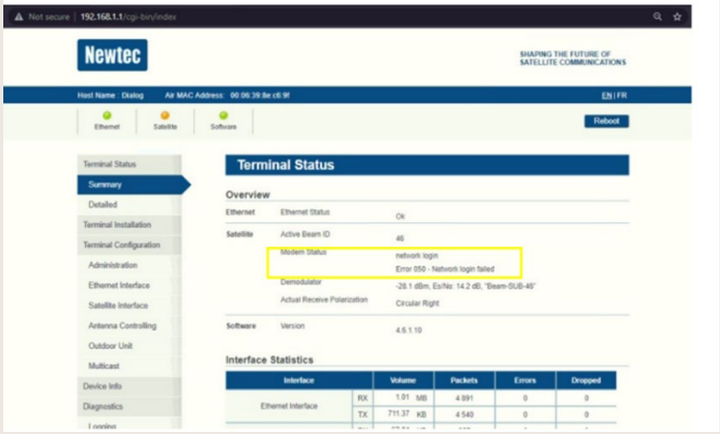

For further assistance, contact **Volt Broadband Support**:

📞 **0800 124 725** (Mon - Fri, 9 AM - 5 PM)

📧 **support@voltbroadband.co.nz**