



SQL Project

PIZZA

SQL DATA ANALYTICS PROJECT: PIZZA HUT SALES ANALYSIS!

In this project, I analyzed Pizza Hut sales data using SQL to uncover valuable business insights and understand customer purchasing patterns.

- Skills Used:

- SQL
- Joins
- Aggregate Functions (SUM, COUNT, AVG)
- GROUP BY and ORDER BY
- Data Analysis

- Key Insights:

- ✓ Total Revenue Analysis
- ✓ Top-Selling Pizzas
- ✓ Category-wise Sales Performance
- ✓ Order Trends and Customer Preferences

This project helped me strengthen my SQL and data analytics skills by working with real-world business data.

I am continuously learning and exploring Data Analytics, SQL, Python, and Excel.

#SQL #DataAnalytics #DataAnalysis #PizzaHut #SQLProject #Learning #Student


#OpenToWork



CALCULATE RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED.

```
select count(order_id)  
as total_order  
from orders;
```

Result Grid	
	total_order
▶	21350

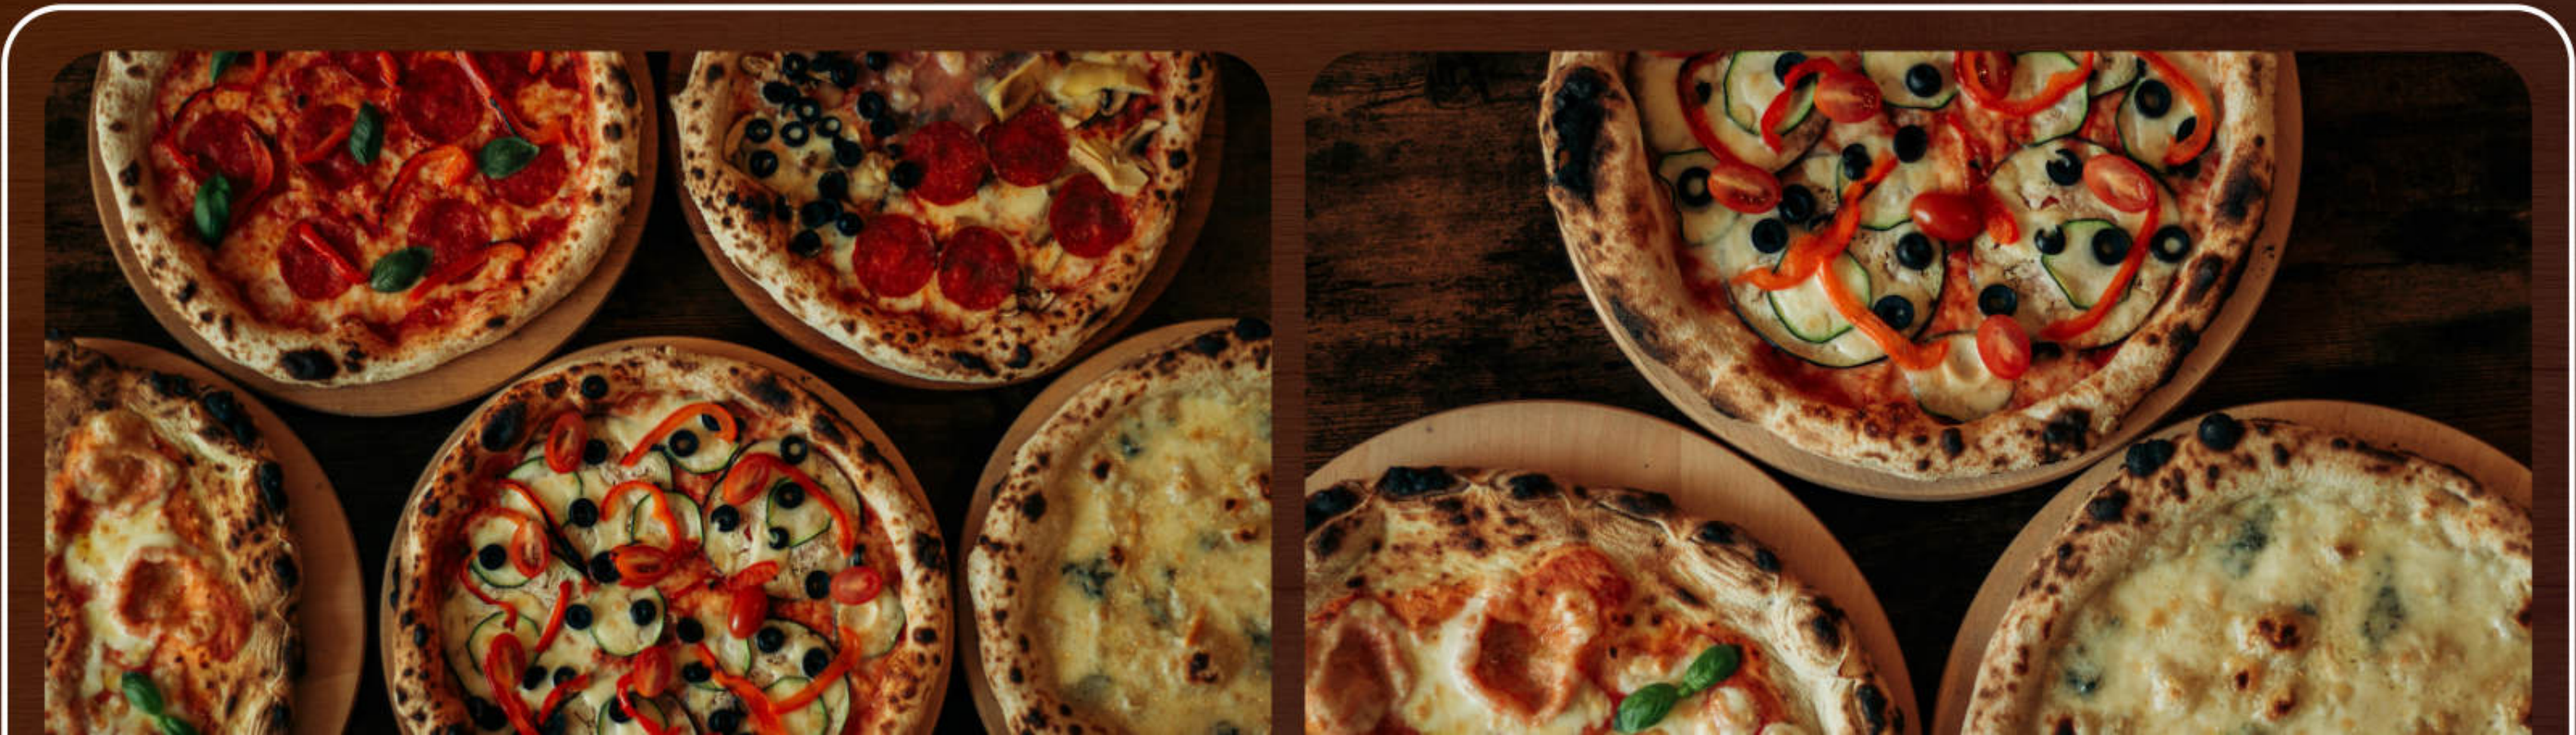

CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES.



```
SELECT  
    ROUND(SUM(order_details.quantity * pizzas.price),  
          2) AS total_sales  
FROM  
    order_details  
    JOIN  
    pizzas ON pizzas.pizza_id = order_details.pizza_id;
```

Result Grid	
	total_sales
▶	817860.05

IDENTIFY THE HIGHEST-PRICED PIZZA.

```
• select max(price) as max_price from pizzas;

• SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```

Result Grid	
	max_price
▶	35.95



IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED.

```
• SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS order_count
FROM
    pizzas
    JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

	size	order_count
▶	L	18526
	M	15385
	S	14137
	XL	544
	XXL	28



LIST THE TOP 5 MOST ORDERED PIZZA TYPES ALONG WITH THEIR QUANTITIES.

```
• SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

	name	quantity
▶	The Classic Deluxe Pizza	2453
	The Barbecue Chicken Pizza	2432
	The Hawaiian Pizza	2422
	The Pepperoni Pizza	2418
	The Thai Chicken Pizza	2371



JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.



```
select pizza_types.category , sum(order_details.quantity) as quantity
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.category
order by quantity desc ;
```

Result Grid			Filter Rows
	category	quantity	
▶	Classic	14888	
	Supreme	11987	
	Veggie	11649	
	Chicken	11050	



DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY.

```
select hour(ordr_time) , count(order_id) from orders  
group by hour(ordr_time);
```



Result Grid			Filter Rows:
	hour(ordr_time)	count(order_id)	
▶	11	1231	
	12	2520	
	13	2455	
	14	1472	
	15	1468	
	16	1920	
	17	2336	
	18	2399	
	19	2009	
	20	1642	
	21	1198	
	22	663	
	23	28	
	10	8	
	9	1	

JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS.

```
select category ,  
count(pizza_type_id)  
from  
    pizza_types  
group by  
    category;
```

Result Grid			Filter Rows:
	category	count(pizza_type_id)	
▶	Chicken	6	
	Classic	8	
	Supreme	9	
	Veggie	9	



GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY.

```
select orders.order_date , sum(order_details.quantity)
from orders
join order_details
on orders.order_id= order_details.order_id
group by orders.order_date;
```



Result Grid  Filter Rows:		
	order_date	sum(order_details.quantity)
▶	2015-01-01	162
	2015-01-02	165
	2015-01-03	158
	2015-01-04	106
	2015-01-05	125
	2015-01-06	147
	2015-01-07	138
	2015-01-08	173
	2015-01-09	127
	2015-01-10	146
	2015-01-11	116
	2015-01-12	119
	2015-01-13	120
	2015-01-14	150
	2015-01-15	123
	2015-01-16	158
	2015-01-17	125
	2015-01-18	122
	2015-01-19	142

DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE.

```
select pizza_types.name , sum(order_details.quantity *pizzas.price) as revenue
from pizza_types
join pizzas
on pizza_types.pizza_type_id= pizzas.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.name
order by revenue desc
limit 3;
```

Result Grid			Filter Rows:
	name	revenue	
▶	The Thai Chicken Pizza	43434.25	
	The Barbecue Chicken Pizza	42768	
	The California Chicken Pizza	41409.5	



CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE.

```
select pizza_types.category ,round(sum(order_details.quantity * pizzas.price) /(select  
round(sum(order_details.quantity* pizzas.price) ,2) as total_sales  
from order_details  
join pizzas on pizzas.pizza_id = order_details.pizza_id) *100 ,2 )as revenue  
from pizza_types  
join pizzas  
on pizza_types.pizza_type_id = pizzas.pizza_type_id  
join order_details  
on order_details.pizza_id = pizzas.pizza_id  
group by pizza_types.category order by revenue desc;
```

Result Grid			Filter R
	category	revenue	
▶	Classic	26.91	
	Supreme	25.46	
	Chicken	23.96	
	Veggie	23.68	

ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.

```
select order_date,  
sum(revenue) over(order by order_date) as cum_revenue  
from  
(select orders.order_date , sum(order_details.quantity * pizzas.price )as revenue  
from order_details  
join pizzas  
on order_details.pizza_id = pizzas.pizza_id  
join orders  
on orders.order_id = order_details.order_id  
group by orders.order_date ) as sales;
```

Result Grid   Filter Rows:		
	order_date	cum_revenue
▶	2015-01-01	2713.8500000000004
	2015-01-02	5445.75
	2015-01-03	8108.15
	2015-01-04	9863.6
	2015-01-05	11929.55
	2015-01-06	14358.14358.5
	2015-01-07	16560.7
	2015-01-08	19399.05
	2015-01-09	21526.4
	2015-01-10	23990.350000000002
	2015-01-11	25862.65
	2015-01-12	27781.7
	2015-01-13	29831.300000000003
	2015-01-14	32358.700000000004
	2015-01-15	34343.500000000001
	2015-01-16	36937.650000000001
	2015-01-17	39001.750000000001
	2015-01-18	40978.600000000006
	2015-01-19	43365.750000000001



DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY.

```
select name ,revenue from
(select category, name, revenue,rank() over(partition by category order by revenue desc) as rn
from
(select pizza_types.category, pizza_types.name ,
sum((order_details.quantity) *pizzas.price) as revenue
from pizza_types
join pizzas
on pizza_types.pizza_type_id= pizzas.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by  pizza_types.category, pizza_types.name )as a) as b
where rn <=3;
```

Result Grid			Filter Rows:
	name	revenue	
▶	The Thai Chicken Pizza	43434.25	
	The Barbecue Chicken Pizza	42768	
	The California Chicken Pizza	41409.5	
	The Classic Deluxe Pizza	38180.5	
	The Hawaiian Pizza	32273.25	
	The Pepperoni Pizza	34831.25	The Pepperoni Pizza
	The Spicy Italian Pizza	34831.25	
	The Italian Supreme Pizza	33476.75	
	The Sicilian Pizza	30940.5	
	The Four Cheese Pizza	32265.700000000065	
	The Mexicana Pizza	26780.75	
	The Five Cheese Pizza	26066.5	



THANK YOU

