


Project Design Phase-II

Solution Requirements (Functional & Non-functional)

Date	23 June 2026
Name	Lakshmi G
Project Name	Automated Network Request Management System
Maximum Marks	4 Marks

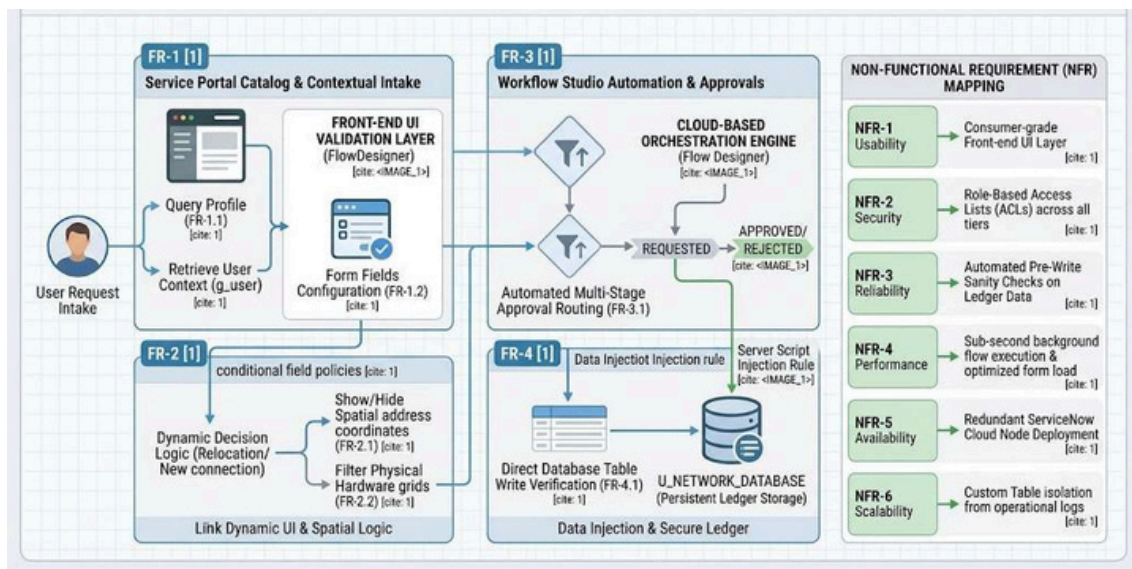

Functional Requirements:

Following are the functional requirements of the proposed soluon.

FR No.	Funconal Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	Request Portal Intake	• Search and access via Service Portal Catalog. • Session context retrieval (Auto-populaon of User Profile). • Dynamic form fields configuraon based on request type.

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-2	UI Policy & Dynamic Logic	• Show asset relocation coordinate fields only when 'Relocation' is selected. • Hide physical hardware selection grids for standard software/modem configurations.
FR-3	Workflow & Approval Automation	• Trigger real-time, multi-stage approval round via Flow Designer. • Automated line manager email/portal task notifications. • Dynamic request state transitions (Requested, Approved, Rejected).
FR-4	Record Insertion & Ledger Management	• Secure data injection on pipeline upon line-manager approval sign-off. • Direct database table write verification to u_network_database.

Non-functional Requirements:

Following are the non-functional requirements of the proposed solution.

FR No.	Non-Functional Requirement	Description
NFR-1	Usability	The interface must provide a consumer-grade user experience. Form loading time should be minimal, and fields must be clear enough to eliminate clerical confusion or user error.
NFR-2	Security	Access constraints must enforce role-based segregation of duties. Requesters must not edit underlying ledger metadata, and approvals must be cryptographic-

FR No.	Non-Functional Requirement	Descripon
		authencated through ServiceNow plaorm core access lists (ACLs).
NFR-3	Reliability	The data integraon pipeline must guarantee transaconal accuracy. It must run automated data sanity and corrup on checks to verify entries before wring rows to the target ledger.
NFR-4	Performance	Form queries and variable rendering loops must execute efficiently. Background automated flows should complete status changes across associated tasks within sub-second thresholds.
NFR-5	Availability	The cloud architecture must stay constantly reachable via redundant node distribuon arrays, providing connuous operaonal availability during business peak transacon hours.
NFR-6	Scalability	The backend configuraon schemas must stay isolated from standard support infrastructure records, allowing mul-department transacon expansions without system degrada on.