


## API Screen Shots

### 1) API that displays all Customer Details

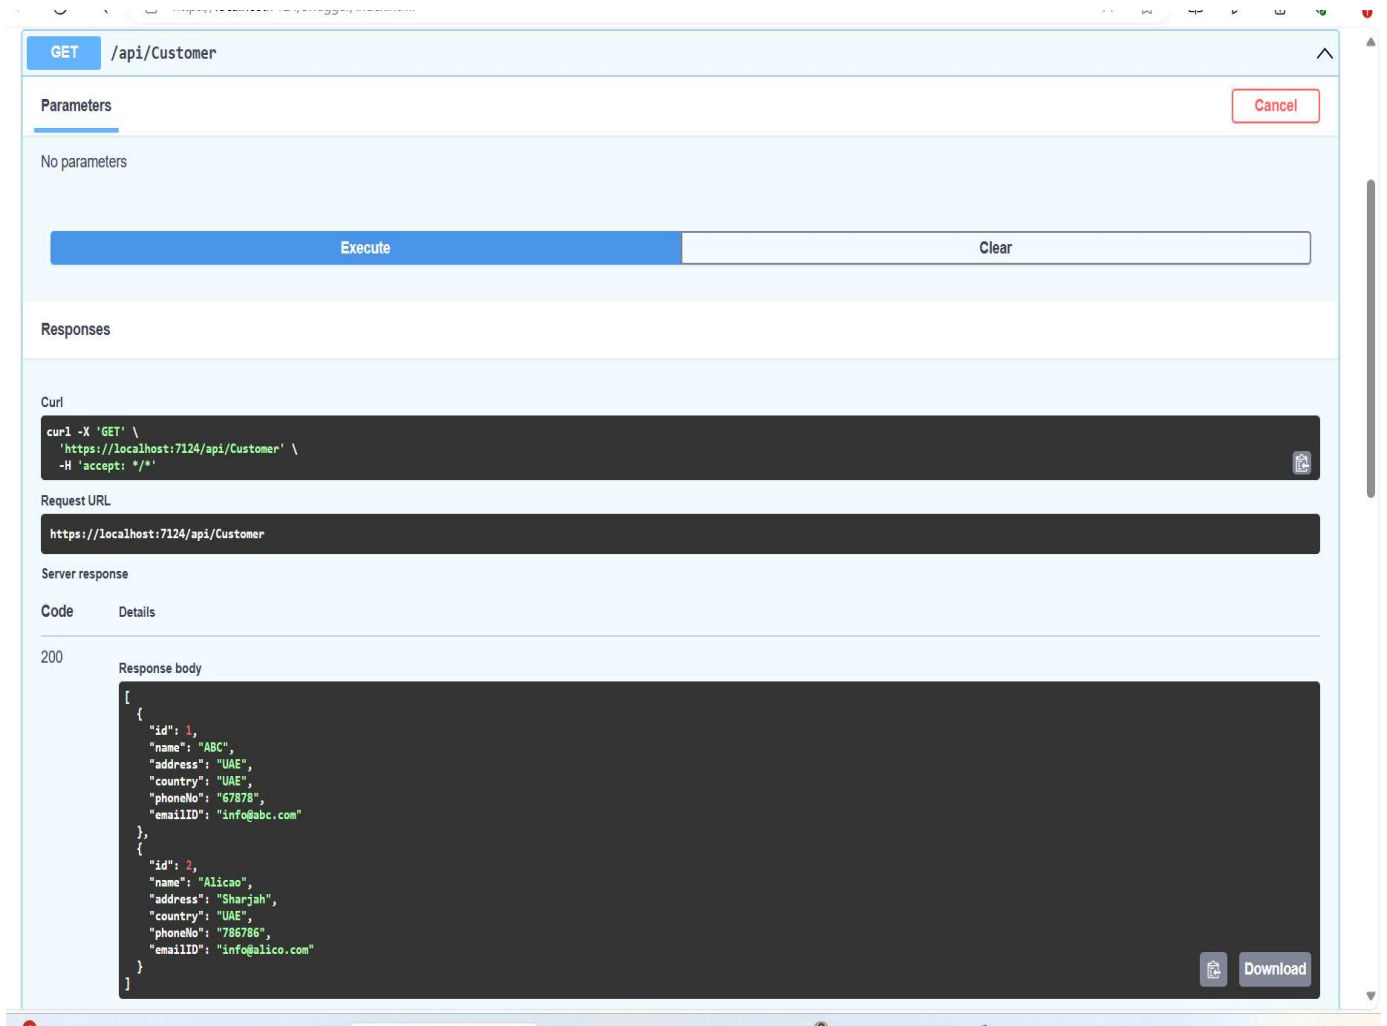

## Output

```
[
  {
    "id": 1,
    "name": "ABC",
    "address": "UAE",
    "country": "UAE",
```

```
"phoneNo": "67878",
"emailID": "info@abc.com"
},
{
  "id": 2,
  "name": "Alicao",
  "address": "Sharjah",
  "country": "UAE",
  "phoneNo": "786786",
  "emailID": "info@alico.com"
}
]
```

## 2) API that Displays Customer Count

Browser address bar: <https://localhost:7124/swagger/index.html>

GET /api/Customer/count

Parameters Cancel

No parameters

Execute Clear

Responses

Curl

```
curl -X 'GET' \
'https://localhost:7124/api/Customer/count' \
-H 'accept: */*'
```

Request URL

```
https://localhost:7124/api/Customer/count
```

Server response

Code	Details
200	<div><p>Response body</p><pre>2</pre><p>Response headers<pre>content-type: application/json; charset=utf-8 date: Mon, 13 May 2024 07:20:51 GMT server: Kestrel</pre></p></div>

Responses

Code	Description	Links
200	Success	No links

### 3) API that Displays Supplier Count

Browser address bar: <https://localhost:7124/swagger/index.html>

GET /api/Supplier/counts

Parameters

No parameters

Execute Clear

Responses

Curl

```
curl -X 'GET' \
  'https://localhost:7124/api/Supplier/counts' \
  -H 'accept: */*'
```

Request URL

<https://localhost:7124/api/Supplier/counts>

Server response

Code	Details
200	<p>Response body</p> <p>Response headers</p> <pre>content-type: application/json; charset=utf-8 date: Mon, 13 May 2024 07:24:24 GMT server: Kestrel</pre>

Responses

Code	Description	Links
200	Success	No links

#### 4) API that Displays Supplier Details

https://localhost:7124/swagger/index.html

GET /api/Supplier

Parameters

No parameters

Execute Clear

Responses

Curl

```
curl -X 'GET' \
  'https://localhost:7124/api/Supplier' \
  -H 'accept: */*'
```

Request URL

```
https://localhost:7124/api/Supplier
```

Server response

Code	Details
200	<p>Response body</p> <pre>[   {     "id": 1,     "name": "XYZ-Supplier",     "address": "UAE",     "country": "UAE",     "phoneNo": "234234",     "emailID": "info@xyz.com"   },   {     "id": 2,     "name": "HandM Supplier",     "address": "Sharjah",     "country": "UAE",     "phoneNo": "565675",     "emailID": "info@handm.com"   } ]</pre> <p>Download</p>

## Output

```
[
  {
    "id": 1,
    "name": "XYZ-Supplier",
    "address": "UAE",
    "country": "UAE",
    "phoneNo": "234234",
```

```
    "emailID": "info@xyz.com"
  },
  {
    "id": 2,
    "name": "HandM Supplier",
    "address": "Sharjah",
    "country": "UAE",
    "phoneNo": "565675",
    "emailID": "info@handm.com"
  },
  {
    "id": 3,
    "name": "string",
    "address": "string",
    "country": "string",
    "phoneNo": "string",
    "emailID": "string"
  }
]
1
```

#### 5) API that Display Meeting Count

GET /api/Meeting/count3

Parameters

No parameters

Execute Clear

Responses

Curl

```
curl -X 'GET' \
  'https://localhost:7124/api/Meeting/count3' \
  -H 'accept: */*'
```

Request URL

https://localhost:7124/api/Meeting/count3

Server response

Code	Details
200	<p>Response body</p> <p>2</p> <p>Response headers</p> <p>content-type: application/json; charset=utf-8 date: Mon, 13 May 2024 07:35:09 GMT server: Kestrel</p>

Responses

Code	Description	Links
200	Success	No links

## 6) API that Displays Meeting Details

https://localhost:7124/swagger/index.html

https://localhost:7124/api/Meeting/GetallMeeting

Server response

Code	Details
200	<p>Response body</p> <pre>[   {     "meetingid": 1,     "organizerName": "Lakshmi",     "title": "customer Meeting at client site",     "meetingDate": "2024-05-09T00:00:00",     "startTime": "2024-05-09T10:00:00",     "endTime": "2024-05-09T11:00:00",     "minutes": "Meet the client discuss about Project",     "meetingStatus": "Scheduled",     "meetingattendies": "Lakshmi"   },   {     "meetingid": 1,     "organizerName": "Lakshmi",     "title": "customer Meeting at client site",     "meetingDate": "2024-05-09T00:00:00",     "startTime": "2024-05-09T10:00:00",     "endTime": "2024-05-09T11:00:00",     "minutes": "Meet the client discuss about Project",     "meetingStatus": "Scheduled",     "meetingattendies": "Mark"   },   {     "meetingid": 2,     "organizerName": "Lakshmi",     "title": "Internal Sales Meeting",     "meetingDate": "2024-05-09T00:00:00",     "startTime": "2024-05-09T10:00:00",     "endTime": "2024-05-09T11:00:00",     "minutes": "Meet the client discuss about Project",     "meetingStatus": "Scheduled",     "meetingattendies": "Lakshmi"   } ]</pre> <p>Response headers</p> <p>content-type: application/json; charset=utf-8 date: Mon, 13 May 2024 07:38:40 GMT server: Kestrel</p>

Responses

Code	Description	Links
200	Success	No links


## Output

```
[
  {
    "meetingid": 1,
    "organizerName": "Lakshmi",
    "title": "customer Meeting at client site",
    "meetingDate": "2024-05-09T00:00:00",
    "startTime": "2024-05-09T10:00:00",
    "endTime": "2024-05-09T11:00:00",
    "minutes": "Meet the client discuss about Project",
    "meetingStatus": "Scheduled",
    "meetingattendies": "Lakshmi"
  },
  {
    "meetingid": 1,
    "organizerName": "Lakshmi",
    "title": "customer Meeting at client site",
    "meetingDate": "2024-05-09T00:00:00",
    "startTime": "2024-05-09T10:00:00",
    "endTime": "2024-05-09T11:00:00",
    "minutes": "Meet the client discuss about Project",
    "meetingStatus": "Scheduled",
    "meetingattendies": "Mark"
  },
  {
    "meetingid": 2,
    "organizerName": "Lakshmi",
    "title": "Internal Sales Meeting",
    "meetingDate": "2024-05-09T00:00:00",
```



```
"startTime": "2024-05-09T10:30:00",
"endTime": "2024-05-09T12:00:00",
"minutes": "work Progress",
"meetingStatus": "Scheduled",
"meetingattendies": "Mark"
},
{
  "meetingid": 2,
  "organizerName": "Lakshmi",
  "title": "Internal Sales Meeting",
  "meetingDate": "2024-05-09T00:00:00",
  "startTime": "2024-05-09T10:30:00",
  "endTime": "2024-05-09T12:00:00",
  "minutes": "work Progress",
  "meetingStatus": "Scheduled",
  "meetingattendies": "Ben"
}
]
```

#### 7) API that displays Trade Transaction Details based on Stage IDs

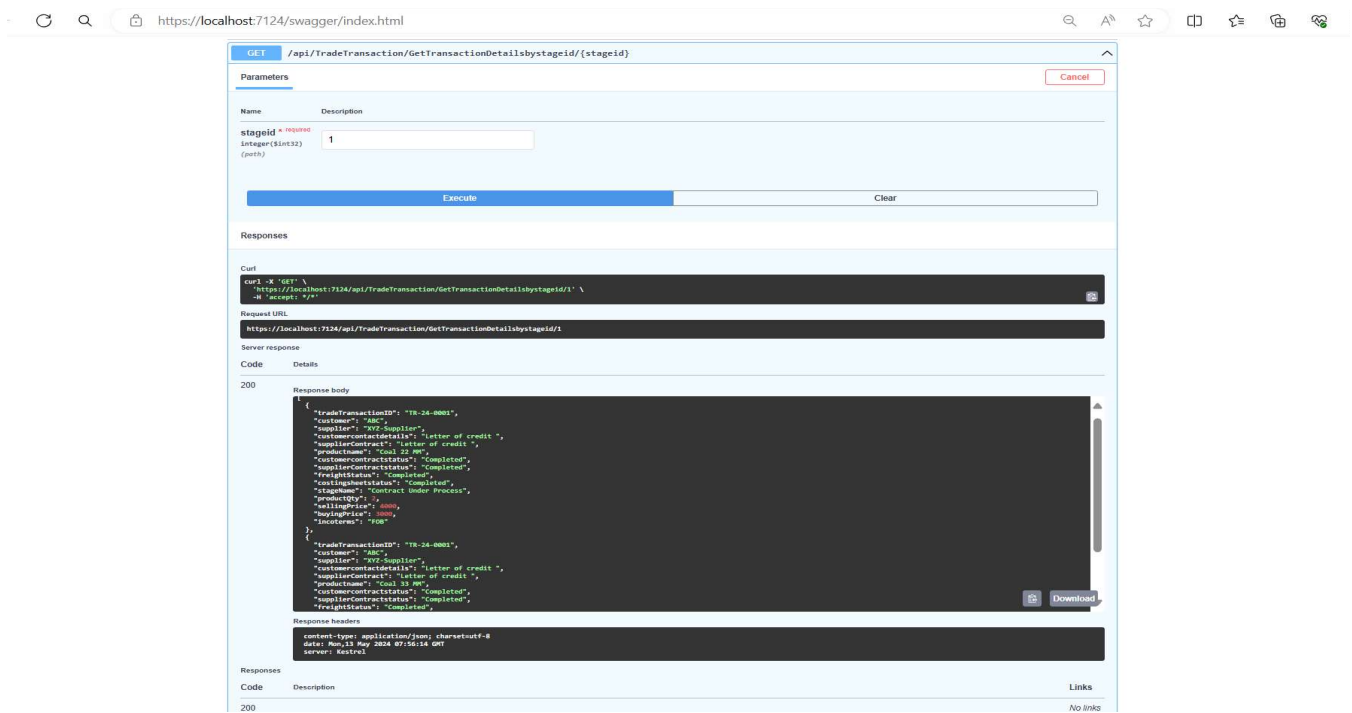

## Out put

```
[
  {
    "tradeTransactionID": "TR-24-0001",
    "customer": "ABC",
    "supplier": "XYZ-Supplier",
    "customercontractdetails": "Letter of credit ",
    "supplierContract": "Letter of credit ",
    "productname": "Coal 22 MM",
    "customercontractstatus": "Completed",
    "supplierContractstatus": "Completed",
    "freightStatus": "Completed",
    "costingsheetstatus": "Completed",
    "stageName": "Contract Under Process",
    "productQty": 2,
```

```
"sellingPrice": 4000,  
"buyingPrice": 3000,  
"incoterms": "FOB"  
},  
{  
  "tradeTransactionID": "TR-24-0001",  
  "customer": "ABC",  
  "supplier": "XYZ-Supplier",  
  "customercontactdetails": "Letter of credit ",  
  "supplierContract": "Letter of credit ",  
  "productname": "Coal 33 MM",  
  "customercontractstatus": "Completed",  
  "supplierContractstatus": "Completed",  
  "freightStatus": "Completed",  
  "costingsheetstatus": "Completed",  
  "stageName": "Contract Under Process",  
  "productQty": 3,  
  "sellingPrice": 5000,  
  "buyingPrice": 3500,  
  "incoterms": "FOB"  
}  
]
```