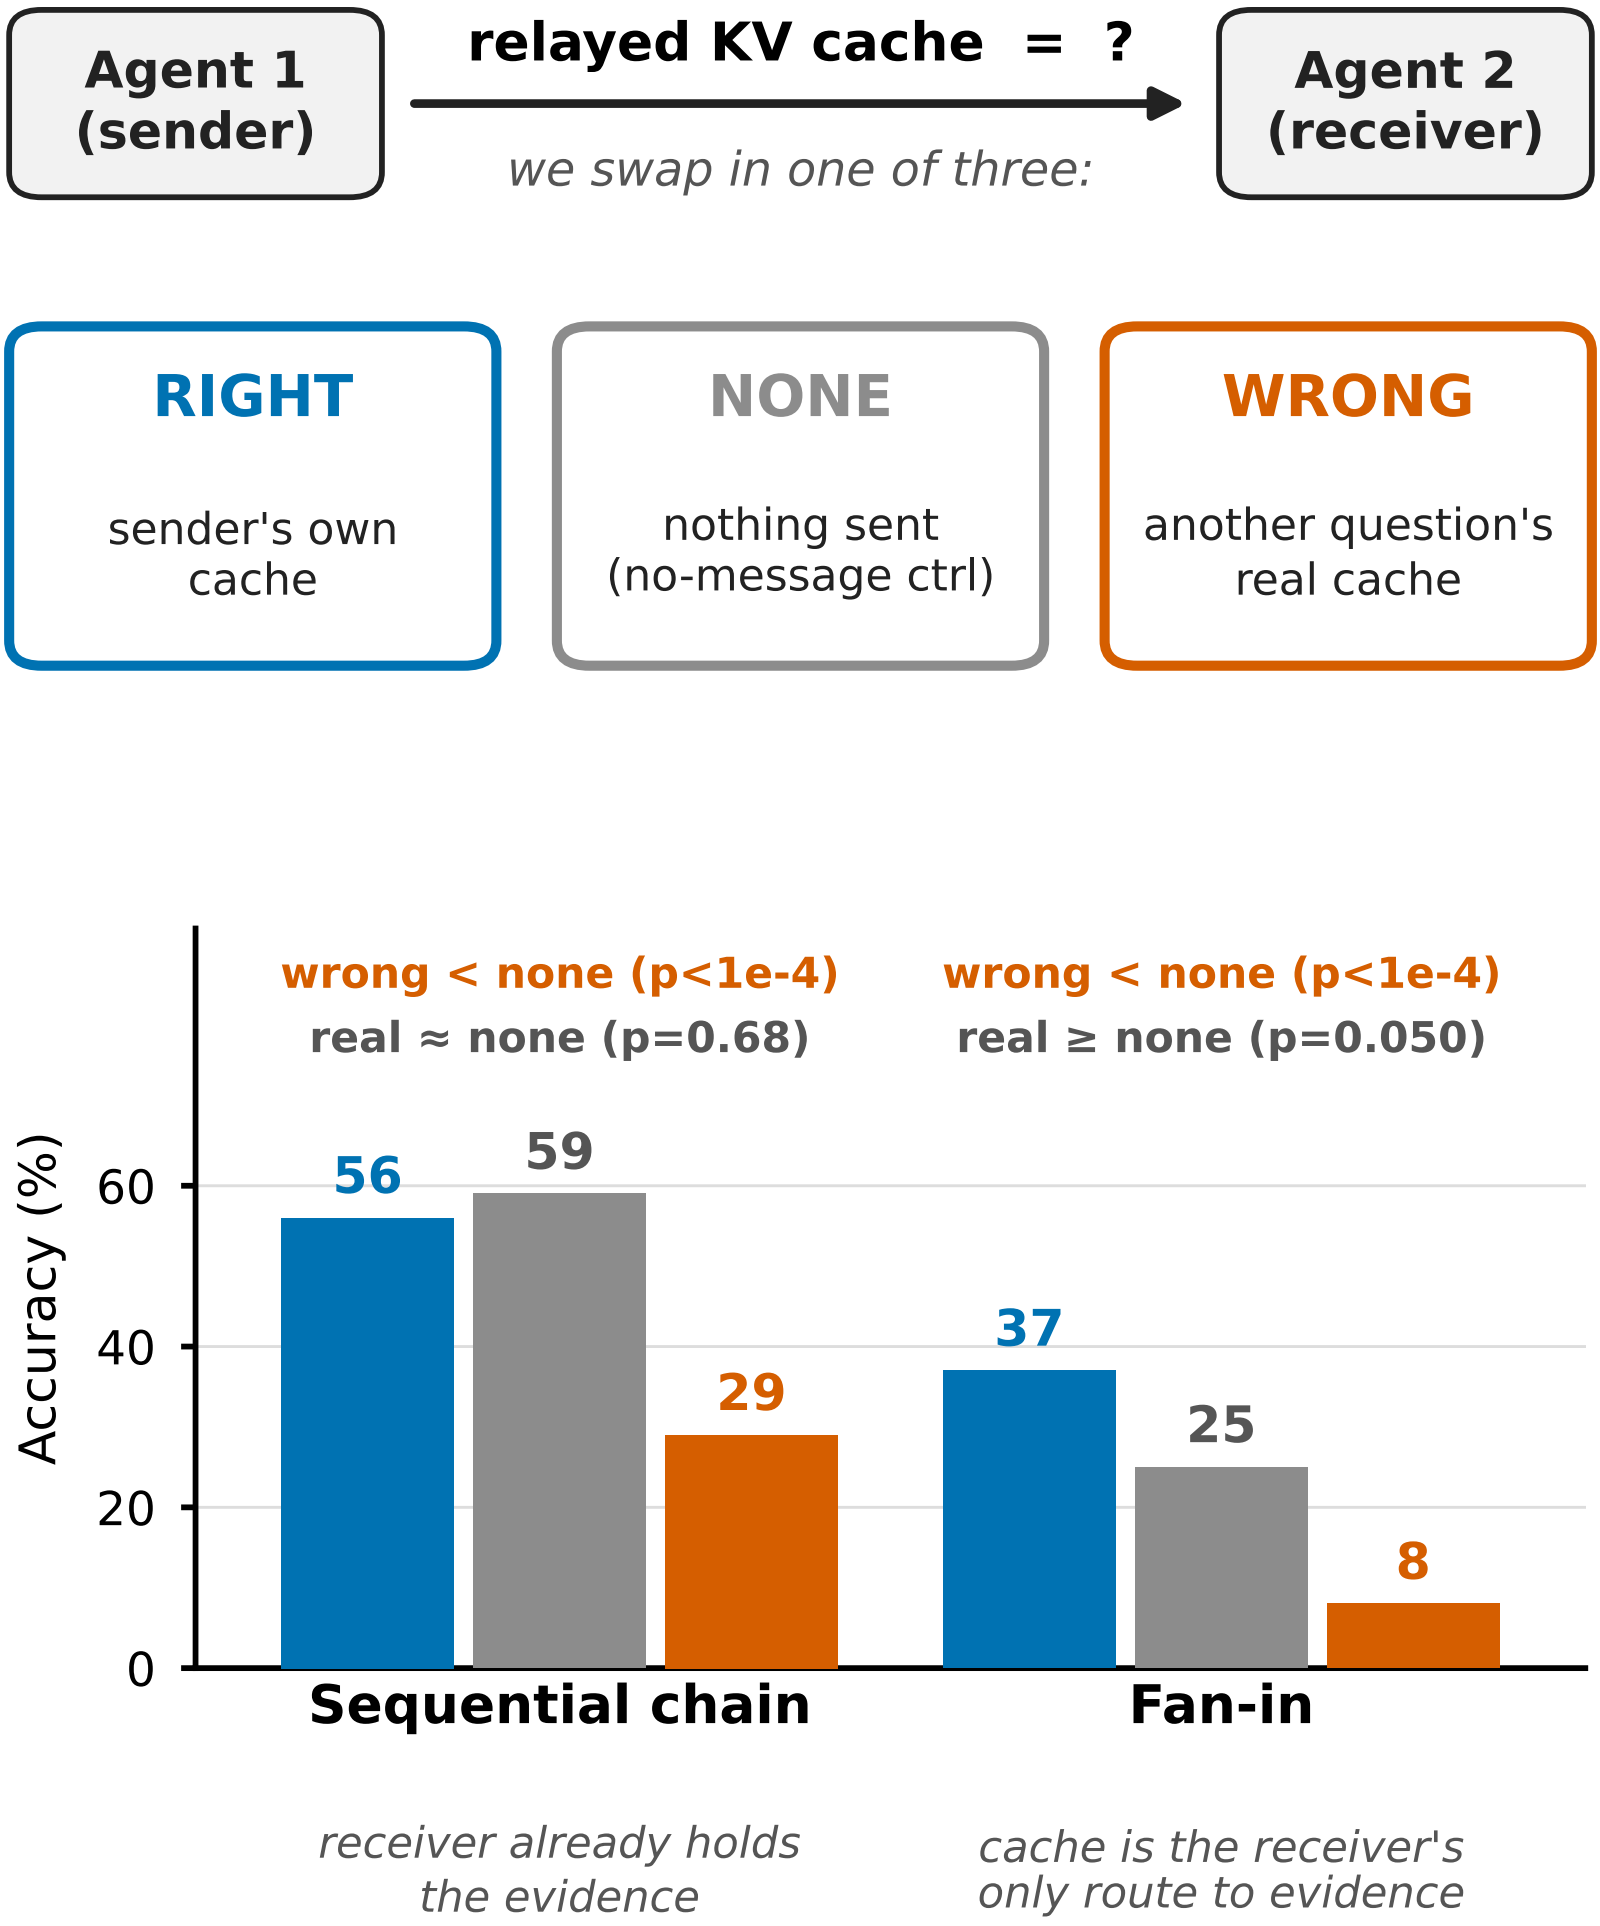
Agent 1
(sender)
relayed KV cache = ?
we swap in one of three:
Agent 2
(receiver)
RIGHT
sender's own cache
NONE
nothing sent (no-message ctrl)
WRONG
another question's real cache
wrong < none (p<1e-4)
real ≈ none (p=0.68)
wrong < none (p<1e-4)
real ≥ none (p=0.050)
Accuracy (%)
0
20
40
60
56
59
29
37
25
8
Sequential chain
Fan-in
receiver already holds the evidence
cache is the receiver's only route to evidence