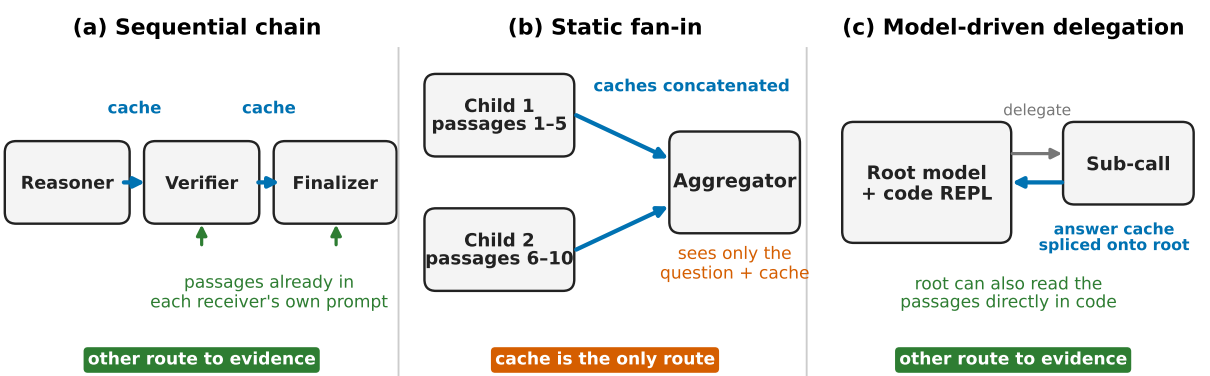
(a) Sequential chain
cache
cache
Reasoner
Verifier
Finalizer
passages already in
each receiver's own prompt
other route to evidence
(b) Static fan-in
Child 1
passages 1–5
Child 2
passages 6–10
caches concatenated
Aggregator
sees only the
question + cache
cache is the only route
(c) Model-driven delegation
delegate
Root model
+ code REPL
Sub-call
answer cache
spliced onto root
root can also read the
passages directly in code
other route to evidence
blue arrow = relayed KV cache (the slot we audit)
green = independent path to the source passages