

```

import os
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
import tensorflow as tf

from sklearn.model_selection import train_test_split, GridSearchCV
from sklearn.preprocessing import StandardScaler
from sklearn.metrics import (
    accuracy_score, precision_score, recall_score, f1_score,
    roc_auc_score, confusion_matrix, classification_report
)
from scikeras.wrappers import KerasClassifier

SEED = 42
np.random.seed(SEED)
tf.random.set_seed(SEED)

import kagglehub

CSV_PATH = kagglehub.dataset_download("mdssh784/pima-indians-diabetes-
dataset") + "/diabetes.csv"

TARGET_COLUMN = "Outcome"

print("TensorFlow:", tf.__version__)

TensorFlow: 2.21.0

if not os.path.exists(CSV_PATH):
    raise FileNotFoundError(
        f"{CSV_PATH} was not found. Upload your CSV and change
        CSV_PATH above."
    )

df = pd.read_csv(CSV_PATH)

print("Dataset shape:", df.shape)
display(df.head())
print("\nColumns:", df.columns.tolist())
print("\nMissing values:")
display(df.isnull().sum())
print("\nClass distribution:")
display(df[TARGET_COLUMN].value_counts())
print("\nSummary statistics:")
display(df.describe())

Dataset shape: (768, 9)

```

	Pregnancies	Glucose	BloodPressure	SkinThickness	Insulin	
BMI \						
0	6	148	72	35	0	33.6
1	1	85	66	29	0	26.6
2	8	183	64	0	0	23.3
3	1	89	66	23	94	28.1
4	0	137	40	35	168	43.1

	DiabetesPedigreeFunction	Age	Outcome
0	0.627	50	1
1	0.351	31	0
2	0.672	32	1
3	0.167	21	0
4	2.288	33	1

Columns: ['Pregnancies', 'Glucose', 'BloodPressure', 'SkinThickness', 'Insulin', 'BMI', 'DiabetesPedigreeFunction', 'Age', 'Outcome']

Missing values:

```
Pregnancies      0
Glucose           0
BloodPressure     0
SkinThickness     0
Insulin           0
BMI               0
DiabetesPedigreeFunction  0
Age               0
Outcome           0
dtype: int64
```

Class distribution:

```
Outcome
0      500
1      268
Name: count, dtype: int64
```

Summary statistics:

	Pregnancies	Glucose	BloodPressure	SkinThickness
Insulin \				
count	768.000000	768.000000	768.000000	768.000000
	768.000000			

mean	3.845052	120.894531	69.105469	20.536458
79.799479				
std	3.369578	31.972618	19.355807	15.952218
115.244002				
min	0.000000	0.000000	0.000000	0.000000
0.000000				
25%	1.000000	99.000000	62.000000	0.000000
0.000000				
50%	3.000000	117.000000	72.000000	23.000000
30.500000				
75%	6.000000	140.250000	80.000000	32.000000
127.250000				
max	17.000000	199.000000	122.000000	99.000000
846.000000				

	BMI	DiabetesPedigreeFunction	Age	Outcome
count	768.000000	768.000000	768.000000	768.000000
mean	31.992578	0.471876	33.240885	0.348958
std	7.884160	0.331329	11.760232	0.476951
min	0.000000	0.078000	21.000000	0.000000
25%	27.300000	0.243750	24.000000	0.000000
50%	32.000000	0.372500	29.000000	0.000000
75%	36.600000	0.626250	41.000000	1.000000
max	67.100000	2.420000	81.000000	1.000000

```
if TARGET_COLUMN not in df.columns:
    raise ValueError(f"{TARGET_COLUMN} not found. Available columns:
{df.columns.tolist()}")
```

```
X = df.drop(columns=[TARGET_COLUMN]).apply(pd.to_numeric,
errors="coerce")
```

```
y = pd.to_numeric(df[TARGET_COLUMN], errors="coerce")
```

```
valid = X.notna().all(axis=1) & y.notna()
```

```
X = X.loc[valid]
```

```
y = y.loc[valid].astype(int)
```

```
X_train, X_test, y_train, y_test = train_test_split(
    X, y, test_size=0.20, random_state=SEED, stratify=y
)
```

```
scaler = StandardScaler()
```

```
X_train_scaled = scaler.fit_transform(X_train)
```

```
X_test_scaled = scaler.transform(X_test)
```


```
print("Train:", X_train_scaled.shape)
```

```
print("Test:", X_test_scaled.shape)
```

```
Train: (614, 8)
```

```
Test: (154, 8)
```

```
plt.figure(figsize=(7, 5))
sns.countplot(x=y)
plt.title("Pima Indians Diabetes – Class Distribution")
plt.xlabel("Outcome (0 = No Diabetes, 1 = Diabetes)")
plt.ylabel("Number of Samples")
plt.show()
```

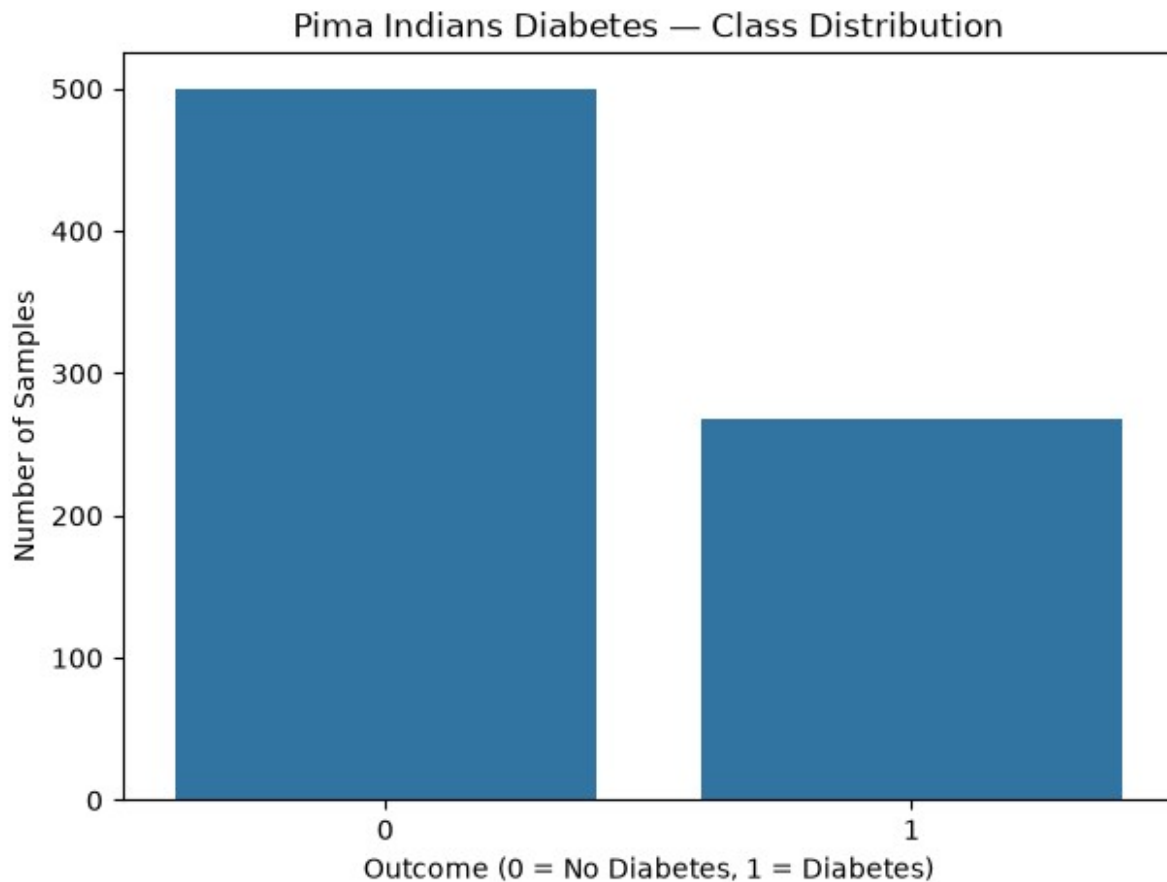

```
def create_model(
    learning_rate=0.001,
    init_mode="uniform",
    activation="relu",
    dropout_rate=0.0,
    neurons=16
):
    model = tf.keras.Sequential([
        tf.keras.layers.Input(shape=(X_train_scaled.shape[1],)),
        tf.keras.layers.Dense(
            neurons, activation=activation,
            kernel_initializer=init_mode
        ),
        tf.keras.layers.Dropout(dropout_rate),
```

```

        tf.keras.layers.Dense(
            max(neurons // 2, 4), activation=activation,
            kernel_initializer=init_mode
        ),
        tf.keras.layers.Dropout(dropout_rate),
        tf.keras.layers.Dense(
            1, activation="sigmoid",
            kernel_initializer=init_mode
        )
    ])

    optimizer = tf.keras.optimizers.Adam(learning_rate=learning_rate)
    model.compile(
        optimizer=optimizer,
        loss="binary_crossentropy",
        metrics=["accuracy"]
    )
    return model

classifier = KerasClassifier(
    model=create_model,
    verbose=0,
    random_state=SEED
)

param_grid = {
    "batch_size": [16, 32],
    "epochs": [30, 60],
    "model__learning_rate": [0.001, 0.0001],
    "model__init_mode": ["uniform", "he_uniform"],
    "model__activation": ["relu", "tanh"],
    "model__dropout_rate": [0.0, 0.2],
    "model__neurons": [16, 32]
}

n_combinations = np.prod([len(v) for v in param_grid.values()])
print("Parameter combinations:", int(n_combinations))
print("Approximate model fits with cv=3:", int(n_combinations * 3))

Parameter combinations: 128
Approximate model fits with cv=3: 384

grid = GridSearchCV(
    estimator=classifier,
    param_grid=param_grid,
    scoring="accuracy",
    cv=3,
    n_jobs=1,
    verbose=2,
    refit=True
)

```

```

)

grid_result = grid.fit(X_train_scaled, y_train)

print("\nBest CV accuracy:", grid_result.best_score_)
print("\nBest parameters:")
print(grid_result.best_params_)

```

Fitting 3 folds for each of 128 candidates, totalling 384 fits

```

E0000 00:00:1790580938.662458 237140 cuda_platform.cc:52] failed call
to cuInit: INTERNAL: CUDA error: Failed call to cuInit: UNKNOWN ERROR
(303)

```

```

E0000 00:00:1790580939.121655 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;

```

```

attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_15}}

```

```

E0000 00:00:1790580946.811790 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

```

```

[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 8.5s

```

```

E0000 00:00:1790580955.673547 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;

```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 8.8s
```

```
E0000 00:00:1790580963.857787 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 8.2s
```

```
E0000 00:00:1790580972.905788 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 9.0s
```

```
E0000 00:00:1790580981.233767 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 8.3s
```

```
E0000 00:00:1790580989.825668 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 8.6s
```

```
E0000 00:00:1790580998.287077 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 8.5s
```

```
E0000 00:00:1790581007.021772 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 8.7s
```

```
E0000 00:00:1790581015.923412 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 8.9s
```

```
E0000 00:00:1790581024.245316 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 8.2s
```

```
E0000 00:00:1790581033.031594 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 8.8s
```

```
E0000 00:00:1790581041.479676 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 8.4s
```

```
E0000 00:00:1790581049.377872 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 7.9s
```

```
E0000 00:00:1790581057.761904 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 8.4s
```

```
E0000 00:00:1790581066.974875 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 9.2s
```

```
E0000 00:00:1790581076.355058 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 9.4s
```

```
E0000 00:00:1790581084.254168 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 7.9s
```

```
E0000 00:00:1790581093.675530 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 9.5s
```

```
E0000 00:00:1790581103.563024 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 9.9s
```

```
E0000 00:00:1790581112.279382 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 8.7s
```

```
E0000 00:00:1790581121.037769 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 8.8s
```

```
E0000 00:00:1790581129.827359 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 8.8s
```

```
E0000 00:00:1790581138.923374 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 9.1s
```

```
E0000 00:00:1790581147.904041 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 9.0s
```

```
E0000 00:00:1790581157.691418 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 9.8s
```

```
E0000 00:00:1790581167.184630 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 9.4s
```

```
E0000 00:00:1790581176.581244 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 9.5s
```

```
E0000 00:00:1790581185.439674 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 8.8s
```

```
E0000 00:00:1790581194.708693 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 9.3s
```

```
E0000 00:00:1790581202.978102 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 8.2s
```

```
E0000 00:00:1790581211.581485 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 8.7s
```

```
E0000 00:00:1790581220.730381 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 9.1s
```

```
E0000 00:00:1790581229.339147 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 8.5s
```

```
E0000 00:00:1790581238.266613 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 8.9s
```

```
E0000 00:00:1790581245.980719 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 7.8s
```

```
E0000 00:00:1790581255.182952 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 9.3s
```

```
E0000 00:00:1790581262.606632 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 7.3s
```

```
E0000 00:00:1790581270.186898 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 7.6s
```

```
E0000 00:00:1790581278.900845 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 8.7s
```

```
E0000 00:00:1790581286.097891 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 7.2s
```

```
E0000 00:00:1790581293.737549 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 7.6s
```

```
E0000 00:00:1790581300.882952 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 7.2s
```

```
E0000 00:00:1790581308.582933 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 7.7s
```

```
E0000 00:00:1790581315.787238 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 7.2s
```

```
E0000 00:00:1790581322.754639 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 7.0s
```

```
E0000 00:00:1790581329.904109 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 7.2s
```

```
E0000 00:00:1790581337.950220 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 8.1s
```

```
E0000 00:00:1790581345.971837 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 8.0s
```

```
E0000 00:00:1790581353.247409 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 7.3s
```

```
E0000 00:00:1790581359.313382 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 6.0s
```

```
E0000 00:00:1790581366.384456 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 7.1s
```

```
E0000 00:00:1790581375.109790 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 8.8s
```

```
E0000 00:00:1790581381.810763 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
```

```
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 6.6s
```

```
E0000 00:00:1790581389.610559 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 7.7s
```

```
E0000 00:00:1790581394.710715 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 5.1s
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 4.2s
```

```
E0000 00:00:1790581403.086277 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
```

```
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 4.2s
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 4.9s
```

```
E0000 00:00:1790581408.275377 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_15}}
```

```
E0000 00:00:1790581413.764071 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 5.8s
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 4.3s
```

```
E0000 00:00:1790581422.712097 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
```

```
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 4.7s
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 4.3s
```

```
E0000 00:00:1790581430.972475 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 4.0s
[CV] END batch_size=16, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 3.9s
```

```
E0000 00:00:1790581441.402620 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 6.6s
```

```
E0000 00:00:1790581448.967948 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 7.7s
```

```
E0000 00:00:1790581456.281707 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.2s
```

```
E0000 00:00:1790581463.418678 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.1s
```

```
E0000 00:00:1790581470.589601 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.2s
```

```
E0000 00:00:1790581477.925523 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.3s
```

```
E0000 00:00:1790581485.212836 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.3s
```

```
E0000 00:00:1790581493.484763 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 8.3s
```

```
E0000 00:00:1790581500.572395 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 7.0s
```

```
E0000 00:00:1790581511.023836 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 10.6s
```

```
E0000 00:00:1790581519.663071 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 8.6s
```

```
E0000 00:00:1790581528.554065 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 8.9s
```

```
E0000 00:00:1790581536.486776 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 7.9s
```

```
E0000 00:00:1790581544.229289 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 7.8s
```

```
E0000 00:00:1790581551.552611 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.3s
```

```
E0000 00:00:1790581560.152667 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 8.6s
```

```
E0000 00:00:1790581568.775922 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 8.7s
```

```
E0000 00:00:1790581576.798569 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.9s
```

```
E0000 00:00:1790581584.713167 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.9s
```

```
E0000 00:00:1790581593.085648 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 8.4s
```

```
E0000 00:00:1790581600.725010 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 7.6s
```

```
E0000 00:00:1790581607.748258 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 7.0s
```

```
E0000 00:00:1790581615.314463 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 7.6s
```

```
E0000 00:00:1790581623.287476 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 8.0s
```

```
E0000 00:00:1790581631.793451 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 8.5s
```

```
E0000 00:00:1790581640.118863 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 8.3s
```

```
E0000 00:00:1790581647.489236 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.2s
```

```
E0000 00:00:1790581656.639805 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 9.3s
```

```
E0000 00:00:1790581665.867008 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 9.3s
```

```
E0000 00:00:1790581674.865674 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 9.0s
```

```
E0000 00:00:1790581683.316816 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 8.4s
```

```
E0000 00:00:1790581693.992303 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 10.7s
```

```
E0000 00:00:1790581707.978245 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 13.9s
```

```
E0000 00:00:1790581722.665536 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 14.8s
```

```
E0000 00:00:1790581737.944072 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 15.3s
```

```
E0000 00:00:1790581752.392221 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 14.5s
```

```
E0000 00:00:1790581768.001181 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 15.6s
```

```
E0000 00:00:1790581783.458243 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 15.4s
```

```
E0000 00:00:1790581798.349498 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 14.9s
```

```
E0000 00:00:1790581812.973120 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 14.6s
```

```
E0000 00:00:1790581828.135245 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 15.2s
```

```
E0000 00:00:1790581839.845687 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 11.6s
```

```
E0000 00:00:1790581853.406742 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 13.7s
```

```
E0000 00:00:1790581867.028336 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 13.6s
```

```
E0000 00:00:1790581881.549048 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 14.5s
```

```
E0000 00:00:1790581896.615664 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 15.1s
```

```
E0000 00:00:1790581911.719034 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 15.1s
```

```
E0000 00:00:1790581925.066055 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 13.3s
```

```
E0000 00:00:1790581939.725106 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 14.7s
```

```
E0000 00:00:1790581952.273410 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 12.4s
```

```
E0000 00:00:1790581959.111052 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 6.8s
```

```
E0000 00:00:1790581965.822769 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 6.7s
```

```
E0000 00:00:1790581972.537637 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 6.7s
```

```
E0000 00:00:1790581979.342213 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 6.8s
```

```
E0000 00:00:1790581986.079340 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 6.7s
```

```
E0000 00:00:1790581992.849858 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 6.8s
```

```
E0000 00:00:1790581999.986644 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 7.1s
```

```
E0000 00:00:1790582008.364660 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 8.4s
```

```
E0000 00:00:1790582015.576392 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 7.2s
```

```
E0000 00:00:1790582022.786624 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 7.2s
```

```
E0000 00:00:1790582029.919565 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 7.1s
```

```
E0000 00:00:1790582037.045464 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 7.1s
```

```
E0000 00:00:1790582044.164573 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.1s
```

```
E0000 00:00:1790582051.235030 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.1s
```

```
E0000 00:00:1790582058.295131 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.1s
```

```
E0000 00:00:1790582072.634270 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 14.4s
```

```
E0000 00:00:1790582086.979533 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 14.3s
```

```
E0000 00:00:1790582101.693675 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 14.7s
```

```
E0000 00:00:1790582117.375289 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 15.8s
```

```
E0000 00:00:1790582132.678122 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 15.3s
```

```
E0000 00:00:1790582147.605322 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 14.9s
```

```
E0000 00:00:1790582162.727265 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 15.1s
```

```
E0000 00:00:1790582176.130066 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 13.4s
```

```
E0000 00:00:1790582191.758373 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 15.7s
```

```
E0000 00:00:1790582200.268329 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 8.3s
```

```
E0000 00:00:1790582207.720873 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.5s
```

```
E0000 00:00:1790582216.777290 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 9.0s
```

```
E0000 00:00:1790582224.429252 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.6s
```

```
E0000 00:00:1790582231.756035 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.3s
```

```
E0000 00:00:1790582239.400404 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.7s
```

```
E0000 00:00:1790582247.795592 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 8.4s
```

```
E0000 00:00:1790582256.465853 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 8.7s
```

```
E0000 00:00:1790582264.860397 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 8.4s
```

```
E0000 00:00:1790582273.756902 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 8.9s
```

```
E0000 00:00:1790582281.014474 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 7.3s
```

```
E0000 00:00:1790582289.884633 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 9.0s
```

```
E0000 00:00:1790582299.313410 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 9.3s
```

```
E0000 00:00:1790582308.070646 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 8.8s
```

```
E0000 00:00:1790582315.139631 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.1s
```

```
E0000 00:00:1790582322.186051 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.0s
```

```
E0000 00:00:1790582329.649566 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.5s
```

```
E0000 00:00:1790582336.654611 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.0s
```

```
E0000 00:00:1790582344.805238 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 8.2s
```

```
E0000 00:00:1790582353.039457 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 8.3s
```

```
E0000 00:00:1790582360.787634 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 7.6s
```

```
E0000 00:00:1790582368.152349 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 7.4s
```

```
E0000 00:00:1790582375.097674 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 6.9s
```

```
E0000 00:00:1790582382.120447 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 7.0s
```

```
E0000 00:00:1790582389.383713 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.3s
```

```
E0000 00:00:1790582397.073672 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.7s
```

```
E0000 00:00:1790582404.560515 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.5s
```

```
E0000 00:00:1790582411.455076 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 6.9s
```

```
E0000 00:00:1790582419.148247 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.7s
```

```
E0000 00:00:1790582426.370034 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.2s
```

```
E0000 00:00:1790582433.421747 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 7.0s
```

```
E0000 00:00:1790582440.453850 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 7.0s
```

```
E0000 00:00:1790582448.039481 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 7.6s
```

```
E0000 00:00:1790582459.365577 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 11.4s
```

```
E0000 00:00:1790582469.249198 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 9.8s
```

```
E0000 00:00:1790582477.083852 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 7.8s
```

```
E0000 00:00:1790582485.122617 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 8.0s
```

```
E0000 00:00:1790582492.742314 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.6s
```

```
E0000 00:00:1790582499.852468 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 7.1s
```

```
E0000 00:00:1790582507.085318 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.2s
```

```
E0000 00:00:1790582515.657392 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 8.6s
```

```
E0000 00:00:1790582523.863046 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 8.1s
```

```
E0000 00:00:1790582531.932480 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 8.1s
```

```
E0000 00:00:1790582540.229071 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 8.3s
```

```
E0000 00:00:1790582548.646121 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 8.4s
```

```
E0000 00:00:1790582557.851496 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 9.2s
```

```
E0000 00:00:1790582566.939829 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 9.1s
```

```
E0000 00:00:1790582575.632585 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 8.7s
```

```
E0000 00:00:1790582584.522407 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 8.9s
```

```
E0000 00:00:1790582595.811417 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 11.3s
```

```
E0000 00:00:1790582604.681680 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 8.9s
```

```
E0000 00:00:1790582613.053217 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 8.4s
```

```
E0000 00:00:1790582623.016663 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 9.9s
```

```
E0000 00:00:1790582630.653715 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=16, epochs=60, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 7.6s
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 3.2s
```

```
WARNING:tensorflow:5 out of the last 21 calls to <function  
TensorFlowTrainer.make_predict_function.<locals>.one_step_on_data_dist  
ributed at 0x7fb1252d4ae0> triggered tf.function retracing. Tracing is  
expensive and the excessive number of tracings could be due to (1)  
creating @tf.function repeatedly in a loop, (2) passing tensors with  
different shapes, (3) passing Python objects instead of tensors. For  
(1), please define your @tf.function outside of the loop. For (2),  
@tf.function has reduce_retracing=True option that can avoid  
unnecessary retracing. For (3), please refer to  
https://www.tensorflow.org/guide/function#controlling\_retracing and  
https://www.tensorflow.org/api\_docs/python/tf/function for more  
details.
```

```
E0000 00:00:1790582637.042483 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 3.2s
WARNING:tensorflow:5 out of the last 15 calls to <function
TensorFlowTrainer.make_predict_function.<locals>.one_step_on_data_dist
ributed at 0x7fb124d50b80> triggered tf.function retracing. Tracing is
expensive and the excessive number of tracings could be due to (1)
creating @tf.function repeatedly in a loop, (2) passing tensors with
different shapes, (3) passing Python objects instead of tensors. For
(1), please define your @tf.function outside of the loop. For (2),
@tf.function has reduce_retracing=True option that can avoid
unnecessary retracing. For (3), please refer to
https://www.tensorflow.org/guide/function#controlling\_retracing and
https://www.tensorflow.org/api\_docs/python/tf/function for more
details.
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 3.4s
```

```
E0000 00:00:1790582643.608013 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 3.2s
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 3.2s
```

```
E0000 00:00:1790582649.909293 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
```

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

```
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 3.1s  
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 3.2s
```

```
E0000 00:00:1790582656.329284 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 3.2s  
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 3.1s
```

```
E0000 00:00:1790582662.588112 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 3.1s  
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.0, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 3.1s
```

```
E0000 00:00:1790582668.865031 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 3.1s
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 3.1s
```

```
E0000 00:00:1790582675.071100 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 3.1s
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 3.1s
```

```
E0000 00:00:1790582681.328715 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
```

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=relu, model__dropout_rate=0.0, model__init_mode=he_uniform, model__learning_rate=0.001, model__neurons=32; total time= 3.1s

[CV] END batch_size=32, epochs=30, model__activation=relu, model__dropout_rate=0.0, model__init_mode=he_uniform, model__learning_rate=0.001, model__neurons=32; total time= 3.2s

E0000 00:00:1790582687.611784 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=relu, model__dropout_rate=0.0, model__init_mode=he_uniform, model__learning_rate=0.001, model__neurons=32; total time= 3.1s

[CV] END batch_size=32, epochs=30, model__activation=relu, model__dropout_rate=0.0, model__init_mode=he_uniform, model__learning_rate=0.0001, model__neurons=16; total time= 3.1s

E0000 00:00:1790582693.992801 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=relu, model__dropout_rate=0.0, model__init_mode=he_uniform, model__learning_rate=0.0001, model__neurons=16; total time= 3.3s

[CV] END batch_size=32, epochs=30, model__activation=relu, model__dropout_rate=0.0, model__init_mode=he_uniform, model__learning_rate=0.0001, model__neurons=16; total time= 3.1s

```
E0000 00:00:1790582700.411534 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 3.3s
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 3.1s
```

```
E0000 00:00:1790582706.640323 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 3.1s
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 3.3s
```

```
E0000 00:00:1790582713.261409 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
```

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

```
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 3.3s  
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 3.3s
```

```
E0000 00:00:1790582719.813917 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 3.3s  
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 3.3s
```

```
E0000 00:00:1790582726.390684 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 3.3s  
[CV] END batch_size=32, epochs=30, model__activation=relu,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=16; total time= 3.3s
```

```
E0000 00:00:1790582732.994992 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 3.3s
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 3.3s
```

```
E0000 00:00:1790582739.558547 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 3.3s
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 3.4s
```

```
E0000 00:00:1790582746.206037 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
```

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=relu, model__dropout_rate=0.2, model__init_mode=uniform, model__learning_rate=0.0001, model__neurons=32; total time= 3.3s

[CV] END batch_size=32, epochs=30, model__activation=relu, model__dropout_rate=0.2, model__init_mode=he_uniform, model__learning_rate=0.001, model__neurons=16; total time= 3.3s

E0000 00:00:1790582752.779944 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=relu, model__dropout_rate=0.2, model__init_mode=he_uniform, model__learning_rate=0.001, model__neurons=16; total time= 3.3s

E0000 00:00:1790582758.408355 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=relu, model__dropout_rate=0.2, model__init_mode=he_uniform, model__learning_rate=0.001, model__neurons=16; total time= 5.6s

[CV] END batch_size=32, epochs=30, model__activation=relu, model__dropout_rate=0.2, model__init_mode=he_uniform, model__learning_rate=0.001, model__neurons=32; total time= 3.5s

E0000 00:00:1790582765.404671 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func;

```
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 3.5s
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 3.4s
```

```
E0000 00:00:1790582774.384068 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 5.7s
```

```
E0000 00:00:1790582781.298373 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 7.0s
```

E0000 00:00:1790582788.406078 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model_activation=relu, model_dropout_rate=0.2, model_init_mode=he_uniform, model_learning_rate=0.0001, model_neurons=16; total time= 7.1s

E0000 00:00:1790582795.319118 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model_activation=relu, model_dropout_rate=0.2, model_init_mode=he_uniform, model_learning_rate=0.0001, model_neurons=32; total time= 6.8s

E0000 00:00:1790582802.216602 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model_activation=relu, model_dropout_rate=0.2, model_init_mode=he_uniform, model_learning_rate=0.0001, model_neurons=32; total time= 7.0s

```
E0000 00:00:1790582809.284244 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 7.1s
```

```
E0000 00:00:1790582815.636511 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 6.4s
```

```
E0000 00:00:1790582822.026130 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 6.3s
```

```
E0000 00:00:1790582828.475567 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 6.5s
```

```
E0000 00:00:1790582835.030293 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 6.5s
```

```
E0000 00:00:1790582841.904630 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 6.9s
```

```
E0000 00:00:1790582848.530626 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 6.6s
```

```
E0000 00:00:1790582855.016999 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 6.4s
```

```
E0000 00:00:1790582861.600106 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 6.6s
```

```
E0000 00:00:1790582868.411618 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 6.8s
```

```
E0000 00:00:1790582875.047710 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 6.6s
```

```
E0000 00:00:1790582881.179196 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 6.1s
```

```
E0000 00:00:1790582887.421772 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model_activation=tanh,
model_dropout_rate=0.0, model_init_mode=uniform,
model_learning_rate=0.0001, model_neurons=32; total time= 6.2s
```

```
E0000 00:00:1790582892.906028 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model_activation=tanh,
model_dropout_rate=0.0, model_init_mode=he_uniform,
model_learning_rate=0.001, model_neurons=16; total time= 5.5s
[CV] END batch_size=32, epochs=30, model_activation=tanh,
model_dropout_rate=0.0, model_init_mode=he_uniform,
model_learning_rate=0.001, model_neurons=16; total time= 4.8s
```

```
E0000 00:00:1790582898.081728 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_15}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 4.9s
```

```
E0000 00:00:1790582907.280552 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 4.6s
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 4.7s
```

```
E0000 00:00:1790582912.328034 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_15}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,  
model__dropout_rate=0.0, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=32; total time= 4.8s
```

```
E0000 00:00:1790582921.649759 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;
```

attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 4.9s

E0000 00:00:1790582927.065680 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 5.4s

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 4.4s

E0000 00:00:1790582936.235065 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 4.8s

E0000 00:00:1790582942.225402 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1;

```
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 6.1s
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 4.9s
```

```
E0000 00:00:1790582947.505142 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_15}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 5.2s
```

```
E0000 00:00:1790582952.666078 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_15}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 4.9s
```

```
E0000 00:00:1790582962.090172 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
```

```
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 4.9s
```

```
E0000 00:00:1790582967.709195 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 5.6s
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 5.0s
```

```
E0000 00:00:1790582973.004999 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_15}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 4.7s
```

```
E0000 00:00:1790582982.248108 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 4.9s
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 4.9s
```

```
E0000 00:00:1790582987.451308 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_15}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 4.9s
```

```
E0000 00:00:1790582996.842732 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 4.8s  
[CV] END batch_size=32, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 4.9s
```

```
E0000 00:00:1790583002.050779 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_15}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=uniform,  
model__learning_rate=0.0001, model__neurons=32; total time= 4.8s
```

```
E0000 00:00:1790583011.387437 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;  
attr=metadata:string,default=""> This may be expected if your graph  
generating binary is newer than this binary. Unknown attributes will  
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}
```

```
[CV] END batch_size=32, epochs=30, model__activation=tanh,  
model__dropout_rate=0.2, model__init_mode=he_uniform,  
model__learning_rate=0.001, model__neurons=16; total time= 4.9s
```

```
E0000 00:00:1790583016.491881 237140 node_def_util.cc:682] NodeDef  
mentions attribute use_unbounded_threadpool which is not in the op  
definition: Op<name=MapDataset; signature=input_dataset:variant,  
other_arguments: -> handle:variant; attr=f:func;  
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;  
attr=output_shapes:list(shape),min=1;  
attr=use_inter_op_parallelism:bool,default=true;  
attr=preserve_cardinality:bool,default=false;  
attr=force_synchronous:bool,default=false;
```

attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh, model__dropout_rate=0.2, model__init_mode=he_uniform, model__learning_rate=0.001, model__neurons=16; total time= 5.1s
[CV] END batch_size=32, epochs=30, model__activation=tanh, model__dropout_rate=0.2, model__init_mode=he_uniform, model__learning_rate=0.001, model__neurons=16; total time= 5.0s

E0000 00:00:1790583021.821281 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_15}}
E0000 00:00:1790583027.595587 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh, model__dropout_rate=0.2, model__init_mode=he_uniform, model__learning_rate=0.001, model__neurons=32; total time= 6.3s

E0000 00:00:1790583040.975552 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 13.3s

E0000 00:00:1790583047.127930 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 6.1s

E0000 00:00:1790583052.677970 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 5.5s

E0000 00:00:1790583058.323033 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 5.7s

E0000 00:00:1790583063.962094 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 5.6s

E0000 00:00:1790583069.554712 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 5.6s

E0000 00:00:1790583075.364389 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 5.8s

E0000 00:00:1790583080.664711 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=30, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 5.3s

E0000 00:00:1790583087.603734 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 6.9s

E0000 00:00:1790583093.059303 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 5.5s

E0000 00:00:1790583099.156443 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 6.1s

E0000 00:00:1790583105.144461 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 6.0s

E0000 00:00:1790583111.308653 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 6.2s

E0000 00:00:1790583117.340703 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 6.0s

E0000 00:00:1790583123.484693 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 6.2s

E0000 00:00:1790583129.588564 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 6.1s

E0000 00:00:1790583135.867246 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 6.3s

E0000 00:00:1790583141.922981 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 6.0s

E0000 00:00:1790583148.053249 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 6.2s

E0000 00:00:1790583154.182168 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 6.1s

E0000 00:00:1790583160.486544 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 6.3s

E0000 00:00:1790583166.536094 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 6.0s

E0000 00:00:1790583172.975661 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 6.5s

E0000 00:00:1790583179.044757 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 6.1s

E0000 00:00:1790583184.849756 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 5.8s

E0000 00:00:1790583190.114179 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 5.3s

E0000 00:00:1790583195.201300 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 5.1s

E0000 00:00:1790583200.322906 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 5.1s

E0000 00:00:1790583205.459473 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 5.1s

E0000 00:00:1790583210.626497 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 5.2s

E0000 00:00:1790583215.743559 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 5.1s

E0000 00:00:1790583220.845020 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 5.1s

E0000 00:00:1790583226.567946 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 5.7s

E0000 00:00:1790583233.367948 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 6.8s

E0000 00:00:1790583240.113317 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 6.8s

E0000 00:00:1790583246.053382 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 5.8s

E0000 00:00:1790583251.510437 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 5.4s

E0000 00:00:1790583257.346924 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 5.9s

E0000 00:00:1790583263.096484 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 5.7s

E0000 00:00:1790583269.152707 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 6.1s

E0000 00:00:1790583274.749788 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 5.6s

E0000 00:00:1790583280.070217 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 5.3s

E0000 00:00:1790583285.899849 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 5.8s

E0000 00:00:1790583291.238497 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 5.3s

E0000 00:00:1790583300.912425 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 9.8s

E0000 00:00:1790583309.705128 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 8.7s

E0000 00:00:1790583318.232495 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 8.5s

E0000 00:00:1790583327.263530 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 9.1s

E0000 00:00:1790583338.156413 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 11.0s

E0000 00:00:1790583348.822629 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 10.6s

E0000 00:00:1790583359.326592 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 10.5s

E0000 00:00:1790583369.659612 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 10.3s

E0000 00:00:1790583380.774461 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 11.1s

E0000 00:00:1790583391.158694 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 10.4s

E0000 00:00:1790583400.446509 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 9.3s

E0000 00:00:1790583410.474796 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=relu,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 10.1s

E0000 00:00:1790583420.267174 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 9.8s

E0000 00:00:1790583429.184237 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 8.9s

E0000 00:00:1790583439.178482 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 10.0s

E0000 00:00:1790583456.496556 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 17.3s

E0000 00:00:1790583468.010147 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 11.5s

E0000 00:00:1790583477.873465 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 9.8s

E0000 00:00:1790583487.950252 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 10.1s

E0000 00:00:1790583497.558052 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 9.7s

E0000 00:00:1790583508.418925 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 10.9s

E0000 00:00:1790583518.972573 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 10.6s

E0000 00:00:1790583529.842285 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 10.8s

E0000 00:00:1790583540.489480 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 10.6s

E0000 00:00:1790583550.771438 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 10.3s

E0000 00:00:1790583561.688959 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 10.9s

E0000 00:00:1790583573.159053 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 11.5s

E0000 00:00:1790583584.182598 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 11.0s

E0000 00:00:1790583595.832086 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 11.6s

E0000 00:00:1790583606.745903 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 11.0s

E0000 00:00:1790583617.820805 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 11.0s

E0000 00:00:1790583629.822081 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 12.0s

E0000 00:00:1790583641.811040 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 12.0s

E0000 00:00:1790583653.519641 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 11.7s

E0000 00:00:1790583664.079011 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 10.5s

E0000 00:00:1790583675.733132 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.0, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 11.6s

E0000 00:00:1790583687.286735 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 11.6s

E0000 00:00:1790583699.848967 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 12.6s

E0000 00:00:1790583712.123660 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=16; total time= 12.2s

E0000 00:00:1790583723.618570 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 11.5s

E0000 00:00:1790583735.521755 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 12.0s

E0000 00:00:1790583747.224039 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.001, model__neurons=32; total time= 11.7s

E0000 00:00:1790583758.864130 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 11.7s

E0000 00:00:1790583770.869044 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 12.0s

E0000 00:00:1790583782.105517 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 11.2s

E0000 00:00:1790583793.511487 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 11.4s

E0000 00:00:1790583806.384894 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 12.9s

E0000 00:00:1790583818.174732 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 11.8s

E0000 00:00:1790583829.861857 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 11.7s

E0000 00:00:1790583841.829036 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 11.9s

E0000 00:00:1790583853.253565 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=16; total time= 11.5s

E0000 00:00:1790583865.046967 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 11.8s

E0000 00:00:1790583876.938246 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 11.9s

E0000 00:00:1790583887.809543 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.001, model__neurons=32; total time= 10.9s

E0000 00:00:1790583898.245606 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 10.5s

E0000 00:00:1790583908.814998 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 10.6s

E0000 00:00:1790583919.916634 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=16; total time= 11.1s

E0000 00:00:1790583930.280838 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 10.3s

E0000 00:00:1790583940.252131 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph

generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 9.9s

E0000 00:00:1790583949.791904 237140 node_def_util.cc:682] NodeDef mentions attribute use_unbounded_threadpool which is not in the op definition: Op<name=MapDataset; signature=input_dataset:variant, other_arguments: -> handle:variant; attr=f:func; attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1; attr=output_shapes:list(shape),min=1; attr=use_inter_op_parallelism:bool,default=true; attr=preserve_cardinality:bool,default=false; attr=force_synchronous:bool,default=false; attr=metadata:string,default=""> This may be expected if your graph generating binary is newer than this binary. Unknown attributes will be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

[CV] END batch_size=32, epochs=60, model__activation=tanh,
model__dropout_rate=0.2, model__init_mode=he_uniform,
model__learning_rate=0.0001, model__neurons=32; total time= 9.5s

Best CV accuracy: 0.7801689781603699

Best parameters:

```
{'batch_size': 32, 'epochs': 30, 'model__activation': 'tanh',  
'model__dropout_rate': 0.2, 'model__init_mode': 'uniform',  
'model__learning_rate': 0.001, 'model__neurons': 16}
```

```
results = pd.DataFrame(grid_result.cv_results_)
```

```
show_cols = [  
    "rank_test_score", "mean_test_score", "std_test_score",  
    "param_batch_size", "param_epochs",  
    "param_model__learning_rate", "param_model__init_mode",  
    "param_model__activation", "param_model__dropout_rate",  
    "param_model__neurons"  
]
```

```
display(results[show_cols].sort_values("rank_test_score").head(15))
```

	rank_test_score	mean_test_score	std_test_score
param_batch_size \			
88	1	0.780169	0.016913
32			
24	2	0.780161	0.013917
16			
97	3	0.778551	0.023609
32			

16	4	0.778535	0.014621
16			
64	5	0.776917	0.020008
32			
80	5	0.776917	0.019199
32			
17	7	0.776909	0.015635
16			
81	7	0.776909	0.015635
32			
89	7	0.776909	0.015635
32			
65	7	0.776909	0.019678
32			
96	11	0.775283	0.019516
32			
56	11	0.775283	0.016902
16			
60	11	0.775283	0.017816
16			
48	11	0.775283	0.016902
16			
113	11	0.775283	0.016902
32			

	param_epochs	param_model__learning_rate	
param_model__init_mode	\		
88	30	0.001	uniform
24	30	0.001	uniform
97	60	0.001	uniform
16	30	0.001	uniform
64	30	0.001	uniform
80	30	0.001	uniform
17	30	0.001	uniform
81	30	0.001	uniform
89	30	0.001	uniform
65	30	0.001	uniform
96	60	0.001	uniform
56	60	0.001	uniform

60	60	0.001	he_uniform
48	60	0.001	uniform
113	60	0.001	uniform

	param_model__activation	param_model__dropout_rate
param_model__neurons		

88	tanh	0.2
16		
24	tanh	0.2
16		
97	relu	0.0
32		
16	tanh	0.0
16		
64	relu	0.0
16		
80	tanh	0.0
16		
17	tanh	0.0
32		
81	tanh	0.0
32		
89	tanh	0.2
32		
65	relu	0.0
32		
96	relu	0.0
16		
56	tanh	0.2
16		
60	tanh	0.2
16		
48	tanh	0.0
16		
113	tanh	0.0
32		

```
best_model = grid_result.best_estimator_
```

```
y_prob = best_model.predict_proba(X_test_scaled)[: , 1]
```

```
y_pred = (y_prob >= 0.5).astype(int)
```

```
metrics = {
    "Accuracy": accuracy_score(y_test, y_pred),
    "Precision": precision_score(y_test, y_pred, zero_division=0),
    "Recall": recall_score(y_test, y_pred, zero_division=0),
```

```

    "F1-score": f1_score(y_test, y_pred, zero_division=0),
    "AUROC": roc_auc_score(y_test, y_prob)
}

```

```

for name, value in metrics.items():
    print(f"{name}: {value:.4f}")

```

```

print("\nClassification Report:")
print(classification_report(
    y_test, y_pred,
    target_names=["No Diabetes", "Diabetes"],
    zero_division=0
))

```

```

E0000 00:00:1790584075.198197 237140 node_def_util.cc:682] NodeDef
mentions attribute use_unbounded_threadpool which is not in the op
definition: Op<name=MapDataset; signature=input_dataset:variant,
other_arguments: -> handle:variant; attr=f:func;
attr=Targuments:list(type),min=0; attr=output_types:list(type),min=1;
attr=output_shapes:list(shape),min=1;
attr=use_inter_op_parallelism:bool,default=true;
attr=preserve_cardinality:bool,default=false;
attr=force_synchronous:bool,default=false;
attr=metadata:string,default=""> This may be expected if your graph
generating binary is newer than this binary. Unknown attributes will
be ignored. NodeDef: {{node ParallelMapDatasetV2/_14}}

```

```

Accuracy: 0.7338
Precision: 0.6275
Recall: 0.5926
F1-score: 0.6095
AUROC: 0.8231

```

Classification Report:

	precision	recall	f1-score	support
No Diabetes	0.79	0.81	0.80	100
Diabetes	0.63	0.59	0.61	54
accuracy			0.73	154
macro avg	0.71	0.70	0.70	154
weighted avg	0.73	0.73	0.73	154

```

cm = confusion_matrix(y_test, y_pred)

```

```

plt.figure(figsize=(6, 5))
sns.heatmap(
    cm, annot=True, fmt="d", cmap="Blues",
    xticklabels=["No Diabetes", "Diabetes"],
    yticklabels=["No Diabetes", "Diabetes"]
)

```

```
)  
plt.xlabel("Predicted")  
plt.ylabel("Actual")  
plt.title("Confusion Matrix — Best Grid-Search Model")  
plt.show()
```

