

## Using The fn getch()

Compile: Alt + F9 ✓

Run : Alt + R ✓

Console : (Alt + F5)  
X




```
#include <stdio.h>
#include <conio.h>
void main()
{
    clrscr();
    printf("Hello User");
    getch();
}
```

## Using Escape Sequences

=====


o/p

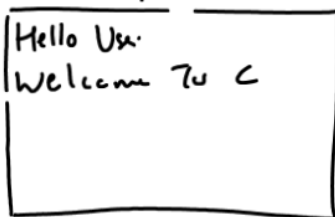


```
#include <stdio.h>
#include <conio.h>
void main()
{
    clrscr();
    printf("Hello User");
    printf("\nWelcome To C");
    getch();
}
```

① `\n` : newline character: Moves the cursor to the next row on console window.

② `\t` : tab character: Moves the cursor to the beginning of Next Tab col

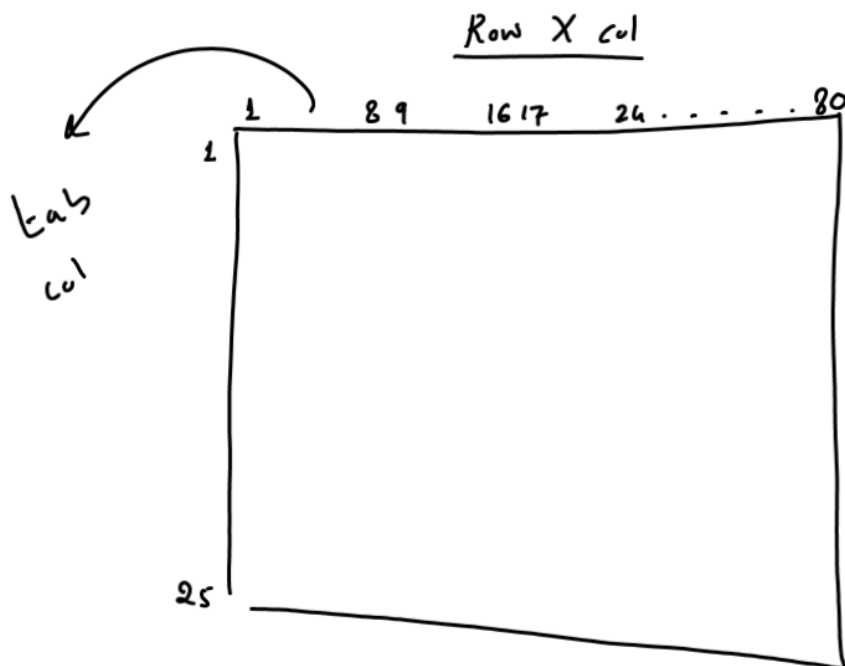

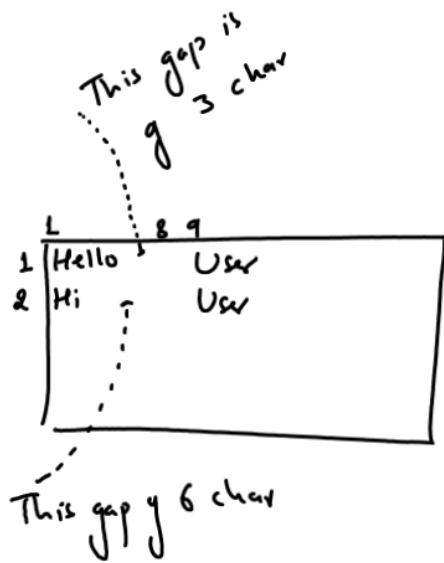

```
#include <stdio.h>
#include <conio.h>
void main()
{
    clrscr();
    printf("Hello\tUser");
    printf("\nHi\tUser");
    getch();
}
```