

Using The Function getch()




Hand-drawn box containing the text "Hello User".

```
#include <stdio.h>
#include <conio.h>
void main()
{
    clrscr();
    printf("Hello User");
    getch();
}
```

- ✓ Compile: ALT+F9
- ✓ Run: ALT+R
- ~~XQ/P: ALT+F5~~

Using Escape Sequences

=====

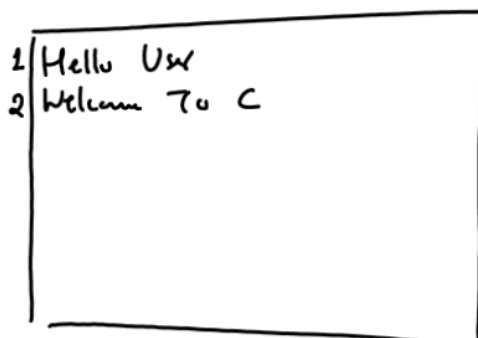


Hand-drawn box containing two lines of text: "1 Hello User" and "2 Welcome To C".

```
#include <stdio.h>
#include <conio.h>
void main()
{
    clrscr();
    printf("Hello User\n");
    printf("Welcome To C");
    getch();
}
```

① $\backslash n$: newline character : Moves the cursor to the next row on console win.

② $\backslash t$: tab character : Moves the cursor to the beginning of next tab col.

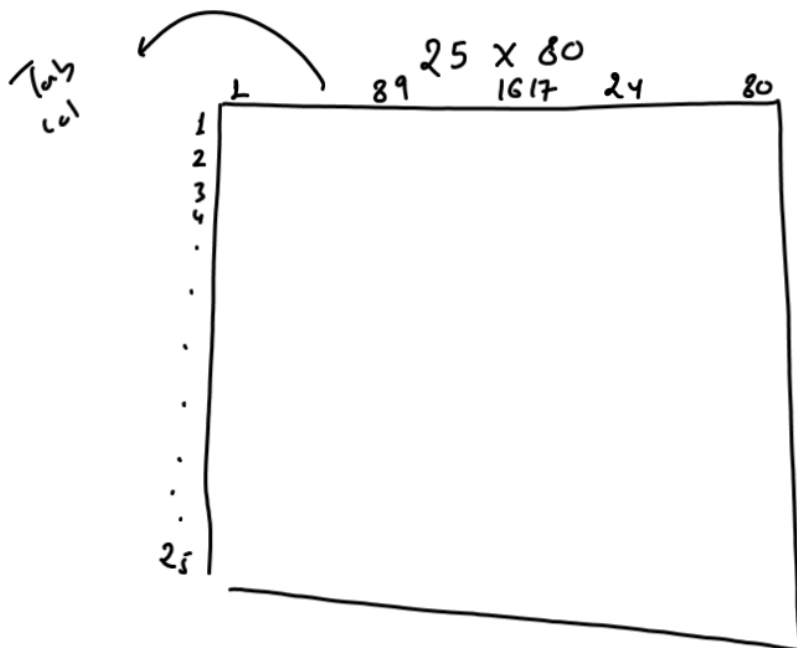

	1	89	16	...	80
1	Hello	User			
2	Hi	User			

```
#include <stdio.h>
#include <conio.h>
void main()
{
    clrscr();
    printf("Hello\tUser\n");
    printf("Hi\tUser");
    getch();
}
```

	1	89	16	17	24	...	80
1	Hello						
2		User					
3			Welc				
4		To					
5	C						

printf("Hello\tUser\t\t\tWelcome\t\tTo\t\tC");

printf("Programming Is It Fun");

