



UNIVERSIDAD NACIONAL AUTÓNOMA DE MÉXICO

Actividad M2-01

Mi segundo repositorio en Git/Github

Materia: Desarrollo de Aplicaciones Móviles

Docente: Cardoso Arellano Cristian

Alumno: Cárdenas López Gonzalo Eduardo

Semestre: 2025-2



Generamos una nueva llave SSH y la añadimos al agent:

```
MINGW64/c/Users/lalo0
Enter file in which to save the key (/c/Users/lalo0/.ssh/id_ed25519): /c/Users/lalo0/.ssh/id_m201
Enter passphrase for "/c/Users/lalo0/.ssh/id_m201" (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /c/Users/lalo0/.ssh/id_m201
Your public key has been saved in /c/Users/lalo0/.ssh/id_m201.pub
The key fingerprint is:
SHA256:zlrIRz5XMFURPZH0oTQwI7dh8oJK0qATp7yXz/hDPRk lalo020404@gmail.com
The key's randomart image is:
+--[ED25519 256]--+
| . o      o B..+=o|
| . = o      * *o +.|
| = . o      . +. =o|
| o + .E + . o |
| . o .. S o |
| . +. * . |
| ..o.o= . |
| .o ++ . |
| .+ o |
+-----[SHA256]-----+


lalo0@Ikalgo MINGW64 ~
$ ssh-add -l
256 SHA256:kIa9c8iTsHwPIw76HqC727seKt/Dq1X8wDga3xtBw7M lalo0@Ikalgo (ED25519)


lalo0@Ikalgo MINGW64 ~
$ ssh-add /c/Users/lalo0/.ssh/id_m201
Identity added: /c/Users/lalo0/.ssh/id_m201 (lalo020404@gmail.com)

lalo0@Ikalgo MINGW64 ~
$ cat /c/Users/lalo0/.ssh/id_m201.pub
ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIAyNbla5Po/ms4nM6cK/WsoPslbifro4g7+oQDNmPSQ3 lalo020404@gmail.com


lalo0@Ikalgo MINGW64 ~
$ |
```

Añadimos la llave pública a GitHub.

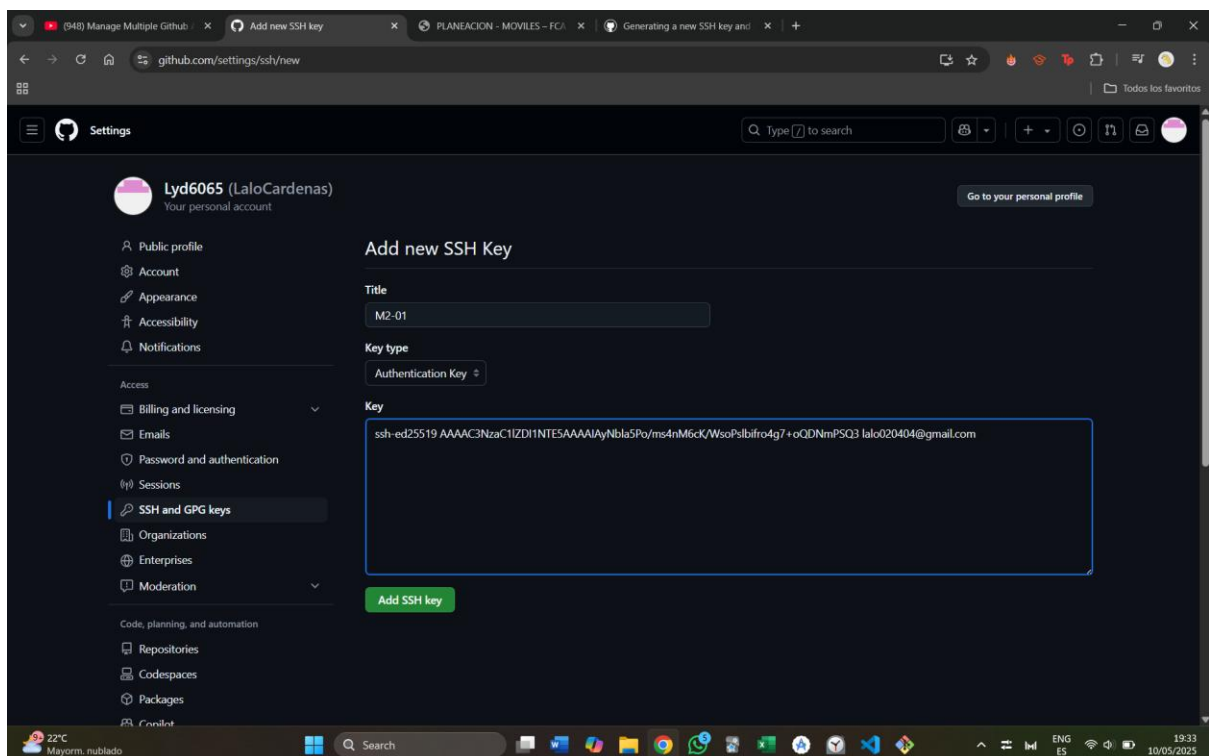


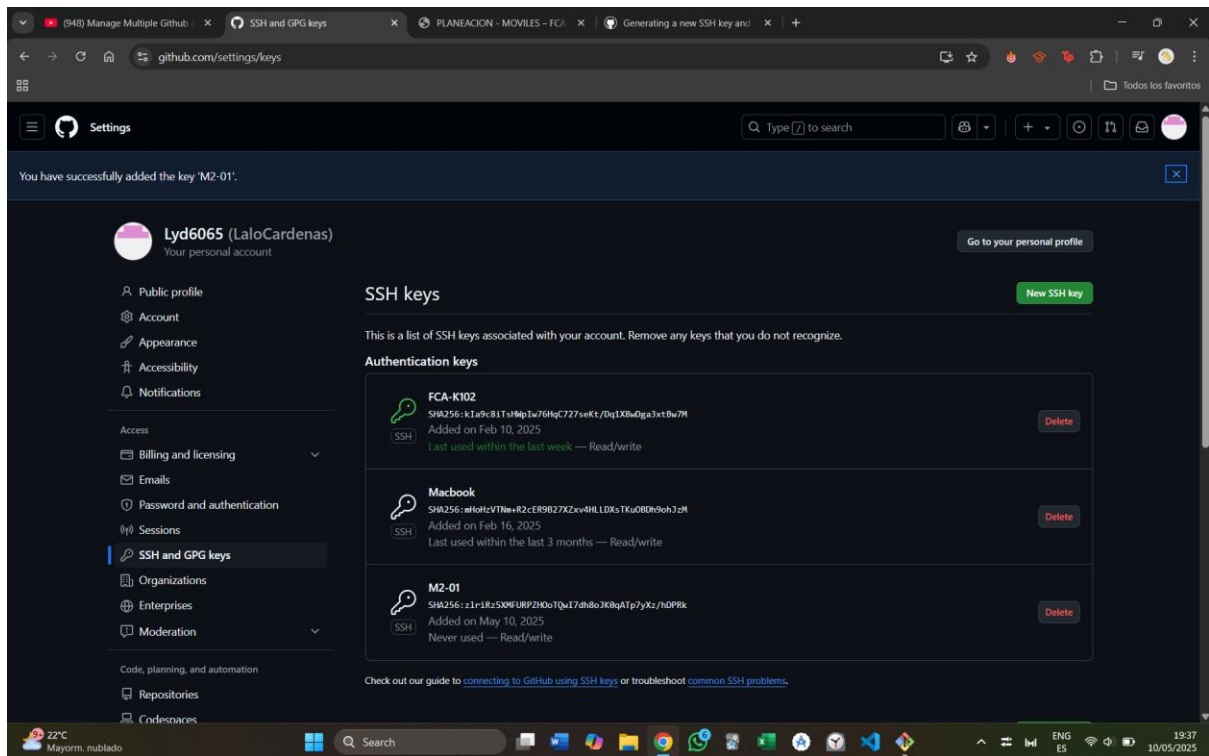


Creamos un nuevo repositorio

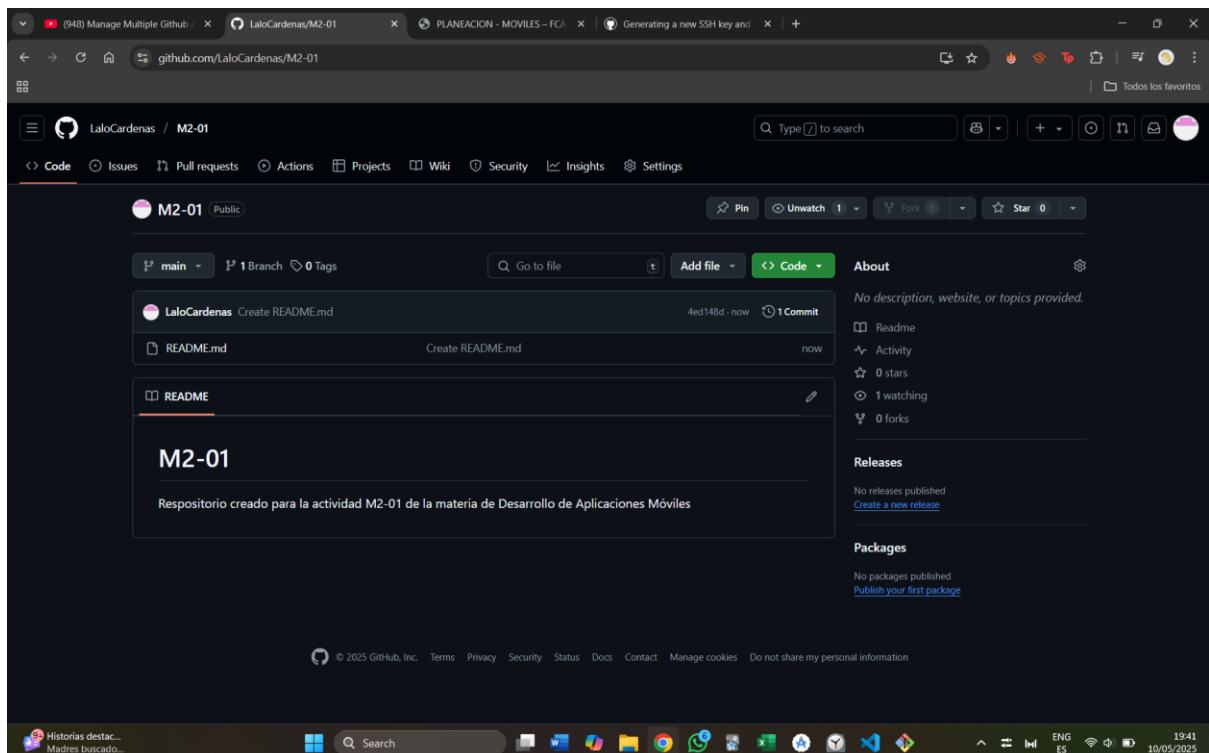

Creamos la rama M2-01

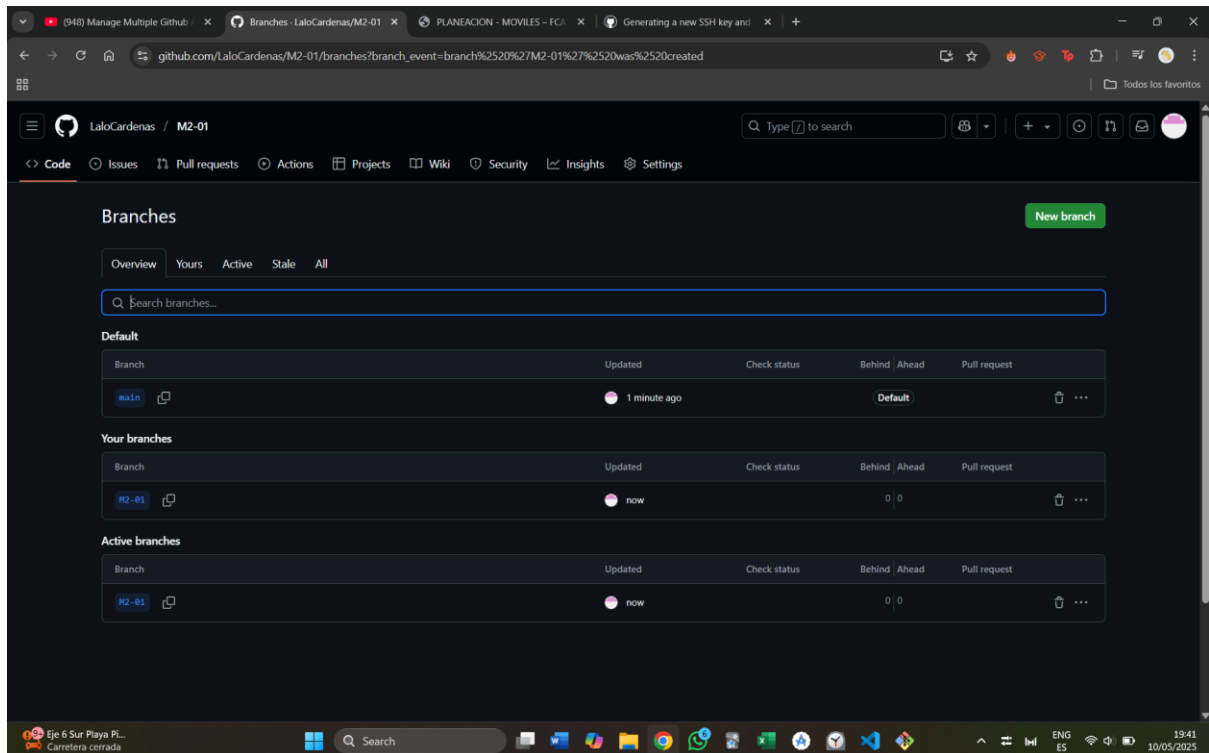

Creamos el archivo M2-01.txt

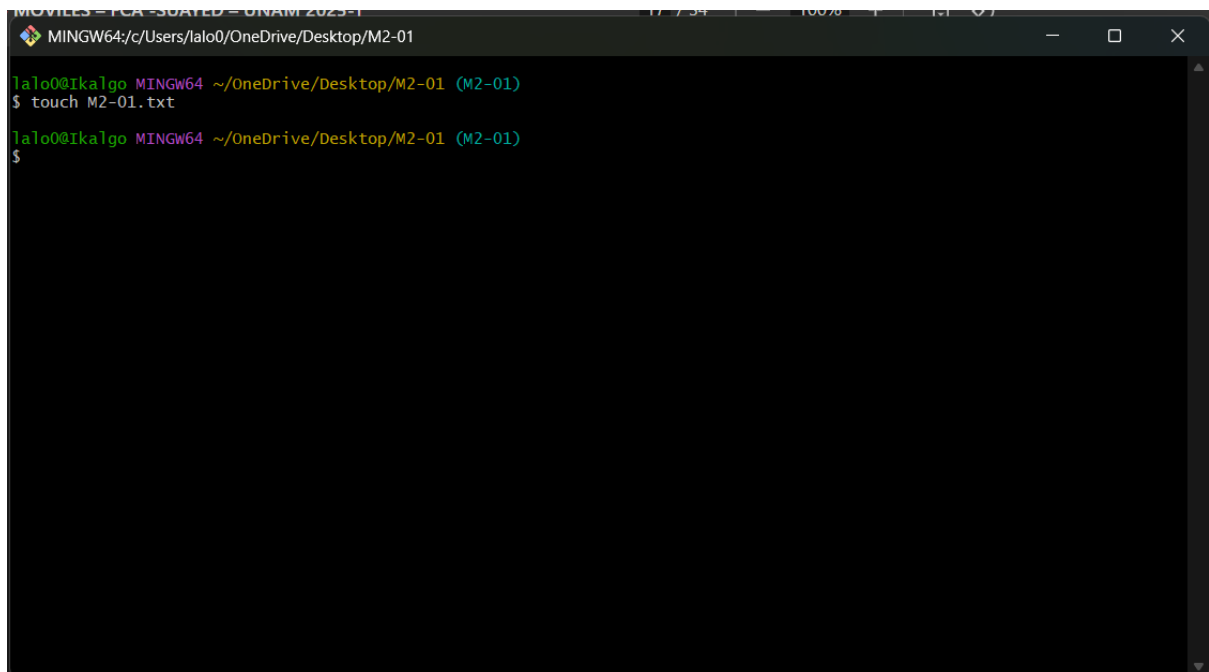

Hacemos el commit

```
MINGW64:/c/Users/lalo0/OneDrive/Desktop/M2-01
lalo0@Ikalgo MINGW64 ~/OneDrive/Desktop/M2-01 (M2-01)
$ touch M2-01.txt

lalo0@Ikalgo MINGW64 ~/OneDrive/Desktop/M2-01 (M2-01)
$ git status
On branch M2-01
Your branch is up to date with 'origin/M2-01'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  M2-01.txt

nothing added to commit but untracked files present (use "git add" to track)

lalo0@Ikalgo MINGW64 ~/OneDrive/Desktop/M2-01 (M2-01)
$ git add .

lalo0@Ikalgo MINGW64 ~/OneDrive/Desktop/M2-01 (M2-01)
$ git commit -m "gonzalo_eduardo_cardenas_lopez"
```

Hacemos el push

```
MINGW64:/c/Users/lalo0/OneDrive/Desktop/M2-01
lalo0@Ikalgo MINGW64 ~/OneDrive/Desktop/M2-01 (M2-01)
$ git status
On branch M2-01
Your branch is up to date with 'origin/M2-01'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  M2-01.txt

nothing added to commit but untracked files present (use "git add" to track)

lalo0@Ikalgo MINGW64 ~/OneDrive/Desktop/M2-01 (M2-01)
$ git add .

lalo0@Ikalgo MINGW64 ~/OneDrive/Desktop/M2-01 (M2-01)
$ git commit -m "gonzalo_eduardo_cardenas_lopez"
[M2-01 bf38e18] gonzalo_eduardo_cardenas_lopez
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 M2-01.txt

lalo0@Ikalgo MINGW64 ~/OneDrive/Desktop/M2-01 (M2-01)
$ git push
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 298 bytes | 298.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/LaloCardenas/M2-01.git
  4ed148d..bf38e18  M2-01 -> M2-01

lalo0@Ikalgo MINGW64 ~/OneDrive/Desktop/M2-01 (M2-01)
$ |
```

Resultado

